



QK PREMIUM

FLIGHT-TYPE DISHWASHERS
WITH 3R+ REINFORCED TRIPLE RINSE

KROMO
YOUR SMART WASH



You deserve the best. With the new QK PREMIUM "Green", you will have it!

This range has been enhanced and rewarded with the SMART LABEL HOST 2023 award for its functional efficiency. Thanks to innovative pre-rinse and rinse arms, we have achieved exceptional results while maintaining the same performance: 35% water savings compared to previous versions! Added to this innovation is the introduction of new options, including a renewed triple rinse with osmotic water and an improved drying system, which make them flexible, complete and first-class flight-type conveyor dishwashers. Let us not forget that KROMO's vision is to minimize

the use of environmental resources but also your operating costs. Features such as the detergent economizer, the concept of thermal insulation, the CPF system and the double reinforced rinse show KROMO's wish to progress in the search for innovative solutions, ever more profitable and environmental friendly. Unique systems like HDRF make the machine energy self-sufficient and cost effective. Finally, the communication experience with the machine has been revolutionized thanks to the brand new Connectivity remote interaction system, available on all electronic devices and on the brand new KROMO App. Everything is under control in the blink of an eye!



FEATURES

STANDARD

- SMART DRIVE+ 10 speed advancement system
- 710 mm wide conveyor
- Plates belt
- TFT 5.7" display and soft touch keyboard
- Frequently used keys shortcut and menu language setting
- Constant monitoring of key operations
- IPX5 electronic board
- Alarms and events report
- Autotimer
- Break Tank system
- Centralized 1-DRAIN and automatic AD drain, with total or partial emptying of the tanks
- Wash arms ALL-IN-1
- Use economizer
- ECO-DET Detergent economizer
- Thermal and acoustic insulation of both the machine and tanks
- ACID PROOF Radial wash tanks in S/S AISI 316 inclined to provide complete drainage of the wash water
- S/S surface filters CLEAN+ to protect the wash tanks as well as the wash pump
- Double-skin, insulated and counterbalanced doors, equipped with anti-drop safety system
- THERMO BARRIER system for comfort in use
- Predisposition for KROMO rinse-aid and detergent dispensers connection
- ACID PROOF stainless steel boilers in AISI 316, fully insulated to reduce thermal loss.
- Vertical self-cleaning pumps
- Booster pump
-  Reinforced triple rinse 3R+ : improved consumptions (reverse osmosis on request)
- CPF System: Controlled Pressure Flow
- Water, energy consumptions and working time control system
- Possible working modes for dryer unit: all off, only fan, half power 4,5 kW + fan, total power 9 kW + fan




FEATURES

OPTIONS

- Five different conveyor belts available, also with cutlery lane
- Different types of dryers: double skin dryer on module (with or without turboblowers) or on shelf
- **NEW:** double skin lateral dryer on shelf: innovative system with upper fan for improved drying results
- Two types of steam condensers available
- Three models of heat recovery to be chosen
- HDRF: patented insulated linear system of dryer and heat recovery
Steam-heated system available. Self-cleaning of the heat exchanger included"
- **NEW:** triple reinforced rinse 3R+ con reverse osmotic water on a separate module
- AS6 Automatic shower with EASY+ with filter system
- Dispensers kit with peristaltic pump, for détergent as well as rinse-aid
- CONNECTIVITY remote control compliant with the HACCP norms (on request)
- Delivery in two or more parts, to ease installation operations
- Automatic self-cleaning of the machine available, with dedicated booster pump on request
- STOCK: Dedicated space for détergent and rinse-aid jugs
- S/S pumps
- Extra power in the boiler

STANDARD BELTS

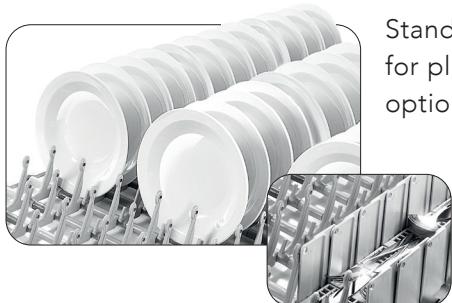

Standard belt
for plates and
optional cutlery lane




Standard belt
for glasses



Standard belt
for trays and utensils


OPTIONAL BELTS

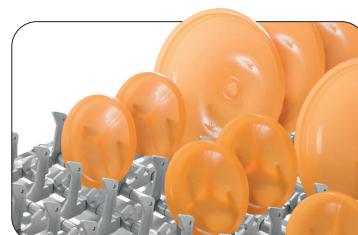

Special belt
for hospitals



Special belt
for thermal trays

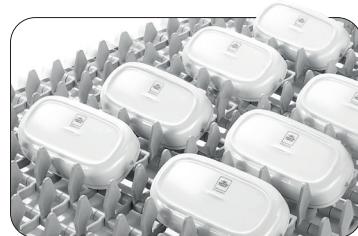


Special belt
for in-flight catering

CONNECTIVITY 4.0 & APP

WHEREVER YOU ARE...
YOUR DISHWASHER, JUST A CLICK AWAY

You will be constantly connected to the machine to monitor the work phases, review any eventual alarm and configure remotely the operating parameters according to your needs. Compliant with HACCP norms. Thanks to our brand new App, you will have access to connected machines and all commercial and technical documentation.

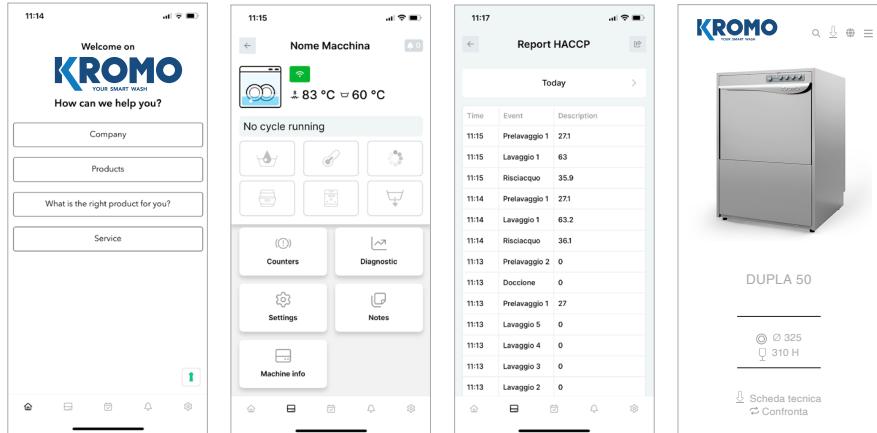

SMART LABEL HOST 2023 FOR FUNCTIONAL EFFICIENCY

According to the KROMO's sustainability vision and attention to customer operating costs, the QK range of flight conveyor dishwashers has been renewed. The result is a great reduction in water consumption: more than 35% when compared to the previous version, an important figure in today's environmental and economic needs. To do so, new rinse and pre-rinse arms and ramps have been designed to achieve one of the lowest consumption levels in our sector. With lower water, KROMO continues to ensure high quality rinsing results. Indeed, a higher washing pressure guarantees optimal results with the removal of all the chemicals present on the dishes. Such reduction of water also means significant savings in terms of detergent and energy, that have become very high expenditure items.



View all the working parameters and historical events, working hours and any problems at any time.



In case of problems, the machine promptly sends an email to you and to the technician who can intervene remotely to solve the problem or equip himself for on-site intervention.







The program allows you to remove an Excel file with all HACCP data at any time.






Discounts are provided for the purchase of 4.0 devices. You will be able to recover 40% of the cost of the car. Request more information to find out more.

QK PREMIUM

 FLIGHT-TYPE DISHWASHERS
WITH 3R+ REINFORCED TRIPLE RINSE

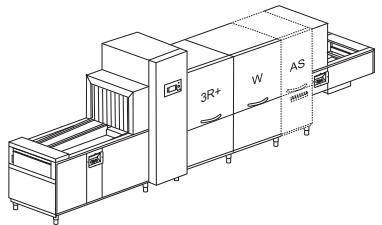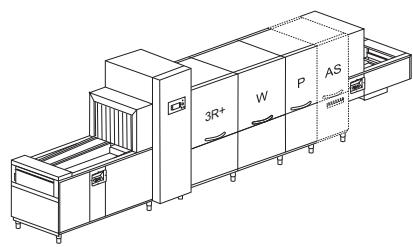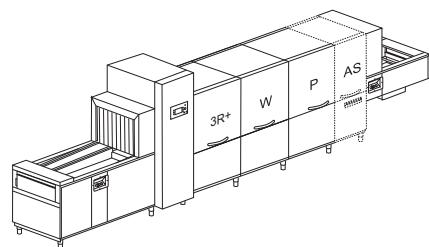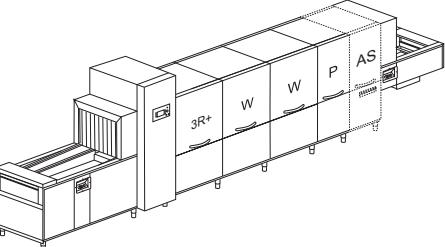Model	Voltage	Capacity	Dimensions	Code
QK 2500 10 SPEEDS				
				
	400 V 3N ~ 50 Hz 27,75 kW	450 H 710 1950 / 3690 dishes / h 2850* dishes / h		QK 2500
	400 V 3N ~ 50 Hz 3,25 kW 17 kg/h	5500x1110 2070/2200H 715 kg AS6 +600 mm		QK 2500 AS6
				QK 2500 V
				QK 2500 V AS6
QK 3800 10 SPEEDS				
				
	400 V 3N ~ 50 Hz 30,2 kW	450 H 710 2400 / 4050 dishes / h 3660* dishes / h		QK 3800
	400 V 3N ~ 50 Hz 4,2 kW 20 kg/h	6100x1110 2070/2200H 850 kg AS6 +600 mm		QK 3800 AS6
				QK 3800 V
				QK 3800 V AS6
QK 4200 10 SPEEDS				
				
	400 V 3N ~ 50 Hz 34,25 kW	450 H 710 3000 / 4800 dishes / h 4200* dishes / h		QK 4200
	400 V 3N ~ 50 Hz 5,25 kW 25 kg/h	6400x1110 2070/2200H 865 kg AS6 +600 mm		QK 4200 AS6
				QK 4200 V
				QK 4200 V AS6
QK 5400 10 SPEEDS				
				
	400 V 3N ~ 50 Hz 50,2 kW	450 H 710 4200 / 6450 dishes / h 5100* dishes / h		QK 5400
	400 V 3N ~ 50 Hz 6,2 kW 29 kg/h	7000x1110 2070/2200H 1000 kg AS6 +600 mm		QK 5400 AS6
				QK 5400 V
				QK 5400 V AS6

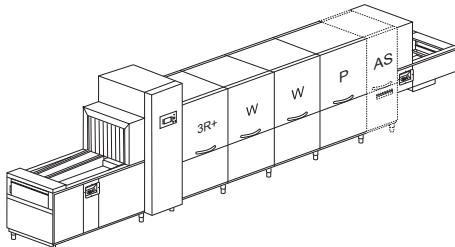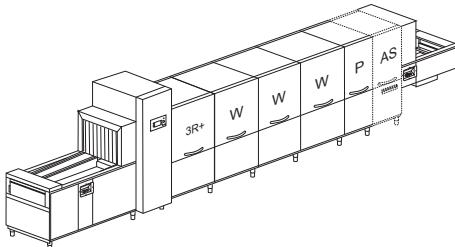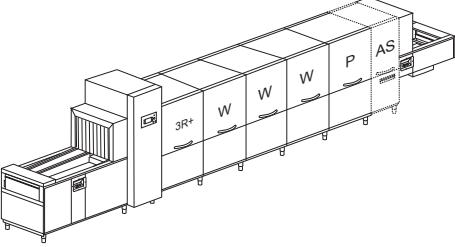Model	Voltage	Capacity	Dimensions	Code
QK 6000 10 SPEEDS				
IMPROVED				
	400 V 3N ~ 50 Hz 51,25 kW	450 H  710	7300x1110x2070/2200H 1015 kg	QK 6000
	400 V 3N ~ 50 Hz 7,25 kW 29 kg/h	4350 / 6750 dishes / h 5550* dishes / h	AS6 +600 mm	QK 6000 AS6
				QK 6000 V
				QK 6000 V AS6
QK 6800 10 SPEEDS				
IMPROVED				
	400 V 3N ~ 50 Hz 70,2 kW	450 H  710	8300x1110x2070/2200H 1150 kg	QK 6800
	400 V 3N ~ 50 Hz 8,2 39 kg/h	5250 / 8100 dishes / h 5550* dishes / h	AS6 +600 mm	QK 6800 AS6
				QK 6800 V
				QK 6800 V AS6
QK 7800 10 SPEEDS				
IMPROVED				
	400 V 3N ~ 50 Hz 74,25 kW	450 H  710	8600x1110x2070/2200H 1165 kg	QK 7800
	400 V 3N ~ 50 Hz 9,25 kW 44 kg/h	5850 / 9000 dishes / h 6900* dishes / h	AS6 +600 mm	QK 7800 AS6
				QK 7800 V
				QK 7800 V AS6

P Prewash**W** Wash**3R+** Reinforced triple rinse with low water consumption: double pre-rinse + rinse on module**AS6** Automatic shower with filter drawer +600 mm**V** Steam-heated

* Productivity according to DIN SPEC 10534 regulation (contact time)

EAC label upon request

Option compatibility to be confirmed by the manufacturer after verification

OPTIONS

Model	220-240 V 3 50 Hz	380-415 V 3N 50 Hz	60 Hz	AUTOTIMER	PRE DOS	DDE-GROUP	DOS/S	SAN
				KROMO disp. connections	Dispensers kit	Dispenser with probe		
QK 2500	+ 2%	●	+ 3%	●	●	€	€	€
QK 2500 AS6	+ 2%	●	+ 3%	●	●	€	€	€
QK 2500 V	+ 1%	●	+ 3%	●	●	€	€	€
QK 2500 V AS6	+ 1%	●	+ 3%	●	●	€	€	€
QK 3800	+ 2%	●	+ 3%	●	●	€	€	€
QK 3800 AS6	+ 2%	●	+ 3%	●	●	€	€	€
QK 3800 V	+ 1%	●	+ 3%	●	●	€	€	€
QK 3800 V AS6	+ 1%	●	+ 3%	●	●	€	€	€
QK 4200	+ 2%	●	+ 3%	●	●	€	€	€
QK 4200 AS6	+ 2%	●	+ 3%	●	●	€	€	€
QK 4200 V	+ 1%	●	+ 3%	●	●	€	€	€
QK 4200 V AS6	+ 1%	●	+ 3%	●	●	€	€	€
QK 5400	+ 2%	●	+ 3%	●	●	€	€	€
QK 5400 AS6	+ 2%	●	+ 3%	●	●	€	€	€
QK 5400 V	+ 1%	●	+ 3%	●	●	€	€	€
QK 5400 V AS6	+ 1%	●	+ 3%	●	●	€	€	€
QK 6000	+ 2%	●	+ 3%	●	●	€	€	€
QK 6000 AS6	+ 2%	●	+ 3%	●	●	€	€	€
QK 6000 V	+ 1%	●	+ 3%	●	●	€	€	€
QK 6000 V AS6	+ 1%	●	+ 3%	●	●	€	€	€
QK 6800	+ 2%	●	+ 3%	●	●	€	€	€
QK 6800 AS6	+ 2%	●	+ 3%	●	●	€	€	€
QK 6800 V	+ 1%	●	+ 3%	●	●	€	€	€
QK 6800 V AS6	+ 1%	●	+ 3%	●	●	€	€	€
QK 7800	+ 2%	●	+ 3%	●	●	€	€	€
QK 7800 AS6	+ 2%	●	+ 3%	●	●	€	€	€
QK 7800 V	+ 1%	●	+ 3%	●	●	€	€	€
QK 7800 V AS6	+ 1%	●	+ 3%	●	●	€	€	€

● Standard

□ Upon request

DDE-GROUP Both detergent (with probe) and rinse-aid dispensers included

DWI Insulation option for the tunnel only, dryer excluded. Shelf dryer can be double skin upon request

Peak-cut connect upon request

Water supply 55 °C

We recommend to install the machine in a well ventilated room, with a properly sized steam exhausting system

	PAP-SAN	DWI	DWI / T	CONNECTIVITY	XP	PAP	SMART DRIVE+
Model	Booster Pump Sanitiz.	Thermoacoustic insulation	Tank insulation	Connectivity (HACCP)	Extra Power	Booster pump	Smart drive 10 speeds
QK 2500	€	●	●	€	€	●	●
QK 2500 AS6	€	●	●	€	€	●	●
QK 2500 V	€	●	●	€	□	●	●
QK 2500 V AS6	€	●	●	€	□	●	●
QK 3800	€	●	●	€	€	●	●
QK 3800 AS6	●	●	●	€	€	●	●
QK 3800 V	€	●	●	€	□	●	●
QK 3800 V AS6	●	●	●	€	□	●	●
QK 4200	€	●	●	€	€	●	●
QK 4200 AS6	●	●	●	€	€	●	●
QK 4200 V	€	●	●	€	□	●	●
QK 4200 V AS6	●	●	●	€	□	●	●
QK 5400	●	●	●	€	€	●	●
QK 5400 AS6	●	●	●	€	€	●	●
QK 5400 V	●	●	●	€	€	●	●
QK 5400 V AS6	●	●	●	€	€	●	●
QK 6000	●	●	●	€	€	●	●
QK 6000 AS6	●	●	●	€	€	●	●
QK 6000 V	●	●	●	€	€	●	●
QK 6000 V AS6	●	●	●	€	€	●	●
QK 6800	●	●	●	€	€	●	●
QK 6800 AS6	●	●	●	€	€	●	●
QK 6800 V	●	●	●	€	€	●	●
QK 6800 V AS6	●	●	●	€	€	●	●
QK 7800	●	●	●	€	€	●	●
QK 7800 AS6	●	●	●	€	€	●	●
QK 7800 V	●	●	●	€	□	●	●
QK 7800 V AS6	●	●	●	€	□	●	●

CONNECTIVITY Includes HACCP option. 10 year plan

XP In case of cold water supply for rinse 8 °C 55 °C, and without any heat recovery, the extra power option is mandatory
In case of cold water supply for rinse (8-15 °C), we recommend to install the heat recovery system optional.

Option compatibility to be confirmed by the manufacturer after verification

OPTIONS

Model	Master switch	Surface filters	Peak-cut for KROMO dosing	Estimated consumption readout	PI	1-DRAIN
QK 2500	●	●	●	●	€	●
QK 2500 AS6	●	●	●	●	€	●
QK 2500 V	●	●	●	●	€	●
QK 2500 V AS6	●	●	●	●	€	●
QK 3800	●	●	●	●	€	●
QK 3800 AS6	●	●	●	●	€	●
QK 3800 V	●	●	●	●	€	●
QK 3800 V AS6	●	●	●	●	€	●
QK 4200	●	●	●	●	€	●
QK 4200 AS6	●	●	●	●	€	●
QK 4200 V	●	●	●	●	€	●
QK 4200 V AS6	●	●	●	●	€	●
QK 5400	●	●	●	●	€	●
QK 5400 AS6	●	●	●	●	€	●
QK 5400 V	●	●	●	●	€	●
QK 5400 V AS6	●	●	●	●	€	●
QK 6000	●	●	●	●	€	●
QK 6000 AS6	●	●	●	●	€	●
QK 6000 V	●	●	●	●	€	●
QK 6000 V AS6	●	●	●	●	€	●
QK 6800	●	●	●	●	€	●
QK 6800 AS6	●	●	●	●	€	●
QK 6800 V	●	●	●	●	€	●
QK 6800 V AS6	●	●	●	●	€	●
QK 7800	●	●	●	●	€	●
QK 7800 AS6	●	●	●	●	€	●
QK 7800 V	●	●	●	●	€	●
QK 7800 V AS6	●	●	●	●	€	●

● Standard

--- Not available

LANE Only with KDRF69 - KDRF6V

DIV Compulsory for machines > 4,5 m

BT Booster pump included

DVGW Not available with heat recovery and steam condenser

Components prescribed by DVGW on request (check option compatibility with the manufacturer)

	AD	ECO-DET	X-BELT	LANE	DIV	BT	DVGW
Model	Automatic drain	Detergent eco-nomizer	Special belt	Cutlery lane	Price for division	Break tank	DVGW
QK 2500	●	●	+ 7 %	----	€	●	€
QK 2500 AS6	●	●	+ 7 %	----	€	●	€
QK 2500 V	●	●	+ 7 %	----	€	●	€
QK 2500 V AS6	●	●	+ 7 %	----	€	●	€
QK 3800	●	●	+ 7 %	----	€	●	€
QK 3800 AS6	●	●	+ 7 %	----	€	●	€
QK 3800 V	●	●	+ 7 %	----	€	●	€
QK 3800 V AS6	●	●	+ 7 %	----	€	●	€
QK 4200	●	●	+ 7 %	+ 5 %	€	●	€
QK 4200 AS6	●	●	+ 7 %	----	€	●	€
QK 4200 V	●	●	+ 7 %	+ 5 %	€	●	€
QK 4200 V AS6	●	●	+ 7 %	----	€	●	€
QK 5400	●	●	+ 7 %	----	€	●	€
QK 5400 AS6	●	●	+ 7 %	----	€	●	€
QK 5400 V	●	●	+ 7 %	----	€	●	€
QK 5400 V AS6	●	●	+ 7 %	----	€	●	€
QK 6000	●	●	+ 7 %	+ 5 %	€	●	€
QK 6000 AS6	●	●	+ 7 %	----	€	●	€
QK 6000 V	●	●	+ 7 %	+ 5 %	€	●	€
QK 6000 V AS6	●	●	+ 7 %	----	€	●	€
QK 6800	●	●	+ 7 %	----	€	●	€
QK 6800 AS6	●	●	+ 7 %	----	€	●	€
QK 6800 V	●	●	+ 7 %	----	€	●	€
QK 6800 V AS6	●	●	+ 7 %	----	€	●	€
QK 7800	●	●	+ 7 %	+ 5 %	€	●	€
QK 7800 AS6	●	●	+ 7 %	----	€	●	€
QK 7800 V	●	●	+ 7 %	+ 5 %	€	●	€
QK 7800 V AS6	●	●	+ 7 %	----	€	●	€

Option compatibility to be confirmed by the manufacturer after verification

OPTIONS

	NZ3	NZ6	NZH6	KDRF68	KDRF69	KDRF6V	KDRF70	KDRF7V	KDRF99M	KDRF9VM	KDRF99MB	KDRF9VMB
Model	Neutral zone 300	Neutral zone 600	Neutral zone for dryer 600	Shelf dryer	Shelf dryer	Steam-heated shelf dryer	Shelf dryer	Steam-heated shelf dryer	Stage Dryer	Steam heated stage dryer	Stage dryer with blowers	Steam heated stage dryer with blowers
QK 2500 - QK 2500 AS6	€	€	€	€	€	----	€	----	€	----	€	----
QK 2500 V - QK 2500 V AS6	€	€	€	€	€	€	€	€	€	€	€	€
QK 3800 - QK 3800 AS6	€	€	€	€	€	----	€	----	€	----	€	----
QK 3800 V - QK 3800 V AS6	€	€	€	€	€	€	€	€	€	€	€	€
QK 4200 - QK 4200 AS6	€	€	€	€	€	----	€	----	€	----	€	----
QK 4200 V - QK 4200 V AS6	€	€	€	€	€	€	€	€	€	€	€	€
QK 5400 - QK 5400 AS6	€	€	€	€	€	----	€	----	€	----	€	----
QK 5400 V - QK 5400 V AS6	€	€	€	€	€	€	€	€	€	€	€	€
QK 6000 - QK 6000 AS6	€	€	€	€	€	----	€	----	€	----	€	----
QK 6000 V - QK 6000 V AS6	€	€	€	€	€	€	€	€	€	€	€	€
QK 6800 - QK 6800 AS6	€	€	€	€	€	----	€	----	€	----	€	----
QK 6800 V - QK 6800 V AS6	€	€	€	€	€	€	€	€	€	€	€	€
QK 7800 - QK 7800 AS6	€	€	€	€	€	----	€	----	€	----	€	----
QK 7800 V - QK 7800 V AS6	€	€	€	€	€	€	€	€	€	€	€	€


---- Not available

NZ3 Recommended with big quantities of trays to wash

NZ6 Recommended for big quantities of trays to wash. Module equipped with a front door

NZH6 Recommended with dryers with blowers

KDRF99M - KDRF9VM - KDRF99MB Module with front door

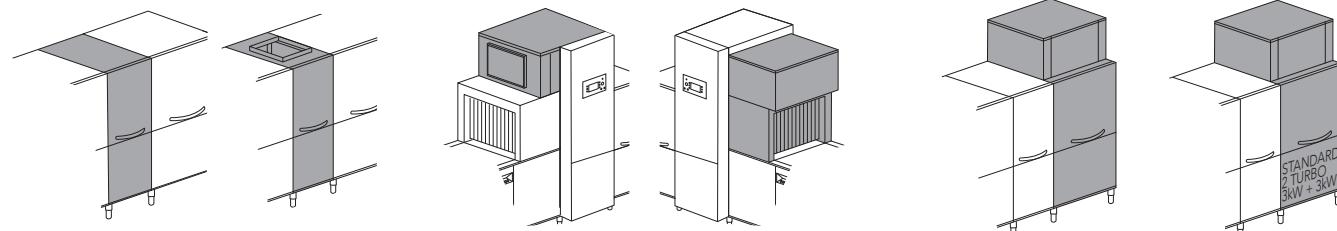

NZ3 + 300 mm Neutral zone

NZH6 + 600 mm Neutral zone with door for dryer

KDRF68 9 kW Shelf drying compact

KDRF69 9 kW Shelf dryer

KDRF99M + 900 mm - 9 kW Dryer module

KDRF99MB + 900 mm - 15 kW Dryer module

NZ6 + 600 mm Neutral zone with door

KDRF6V Steam-heated shelf dryer

KDRF9VM + 900 mm Steam-heated dryer module

KDRF70 Double skin lateral shelf dryer with upper fan

KDRF9VMB + 900 mm Steam-heated dryer module

KDRF7V Steam-heated double skin shelf lateral dryer with upper fan

	KSCF10	KSCF15	KHRF15	KHRF20	KHRPF40	3R+	3R+ RO	STOCK	KHDRF	KHDRFV
Model	Steam condenser	Steam condenser	heat recovery	heat recovery	heat recovery	Triple reinforced rinse	Triple reinforced rinse with RO	Chemicals compartment	Heat recovery with dryer	Heat recovery with dryer
QK 2500 - QK 2500 AS6	€	€	€	€	€	●	€	€	€	----
QK 2500 V - QK 2500 V AS6	€	€	€	€	€	●	€	€	----	€
QK 3800 - QK 3800 AS6	€	€	€	€	€	●	€	€	€	----
QK 3800 V - QK 3800 V AS6	€	€	€	€	€	●	€	€	----	€
QK 4200 - QK 4200 AS6	€	€	€	€	€	●	€	€	€	----
QK 4200 V - QK 4200 V AS6	€	€	€	€	€	●	€	€	----	€
QK 5400 - QK 5400 AS6	€	€	€	€	€	●	€	€	€	----
QK 5400 V - QK 5400 V AS6	€	€	€	€	€	●	€	€	----	€
QK 6000 - QK 6000 AS6	€	€	€	€	€	●	€	€	€	----
QK 6000 V - QK 6000 V AS6	€	€	€	€	€	●	€	€	----	€
QK 6800 - QK 6800 AS6	€	€	€	€	€	●	€	€	€	----
QK 6800 V - QK 6800 V AS6	€	€	€	€	€	●	€	€	----	€
QK 7800 - QK 7800 AS6	€	€	€	€	€	●	€	€	€	----
QK 7800 V - QK 7800 V AS6	€	€	€	€	€	●	€	€	----	€

KSCF15 Not available with optional dryer


3R+ Reinforced triple rinse: Improved consumptions (with reverse osmosis water on request).

KHRF15 - KHRF20 - KHRPF40 - KHDRF - KHDRFV In case of cold water supply for rinse (8-15 °C), we recommend to install the heat recovery system optional.

With osmotic water supply and electrical conductivity lower than 200 microsiemens, it is mandatory to install a stainless steel heat exchanger

All dryers are double skin

Option compatibility to be confirmed by the manufacturer after verification

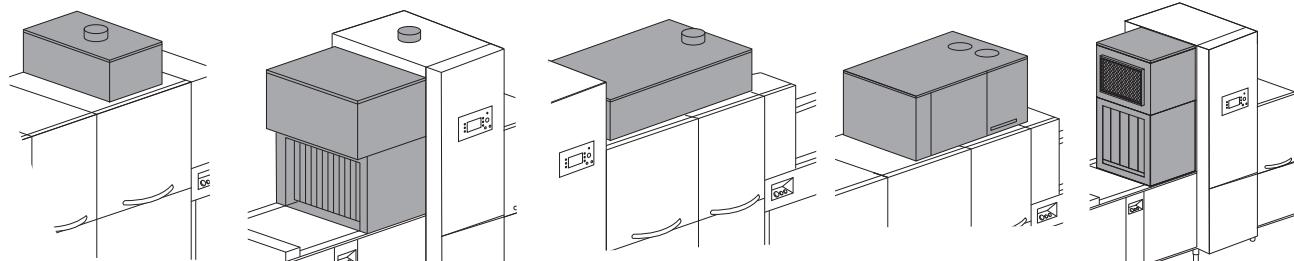

KSCF10	KHRF15	KHRF20	KHRPF40	KHDRF
Steam condenser	Reinforced compact heat recovery	heat recovery	Heat recovery with heat pump	Electric dryer 9 kW + heat recovery
KSCF15	Reinforced steam condenser			KHDRFV Steam heated dryer + heat recovery

OPTIONS


	MI900	MI1200	MIS1200	MI1500	MI1800	MI2200	MIR2200
Model	Entry mod. 900	Entry mod. 1200	Over. entry mod. 1200	Entry mod. 1500	Entry mod. 1800	Entry mod. 2200	Lowered belt entry mod. 2200
QK 2500 - QK 2500 AS6	€	€	●	€	€	€	€
QK 2500 V - QK 2500 V AS6	€	€	●	€	€	€	€
QK 3800 - QK 3800 AS6	€	€	●	€	€	€	€
QK 3800 V - QK 3800 V AS6	€	€	●	€	€	€	€
QK 4200 - QK 4200 AS6	€	€	●	€	€	€	€
QK 4200 V - QK 4200 V AS6	€	€	●	€	€	€	€
QK 5400 - QK 5400 AS6	€	€	●	€	€	€	€
QK 5400 V - QK 5400 V AS6	€	€	●	€	€	€	€
QK 6000 - QK 6000 AS6	€	€	●	€	€	€	€
QK 6000 V - QK 6000 V AS6	€	€	●	€	€	€	€
QK 6800 - QK 6800 AS6	€	€	●	€	€	€	€
QK 6800 V - QK 6800 V AS6	€	€	●	€	€	€	€
QK 7800 - QK 7800 AS6	€	€	●	€	€	€	€
QK 7800 V - QK 7800 V AS6	€	€	●	€	€	€	€

● Standard


□ Upon request

--- Not available


Option compatibility to be confirmed by the manufacturer after verification




Overhanging entry module



Entry module





Lowered belt entry module



Exit module

	MI2700	MIR2700	EM900	EM1200	EM1500	EM1800	EM2200	EM2700
Model	Entry mod. 2700	Lowered belt entry mod. 2700	Exit mod. 900	Exit mod. 1200	Exit mod. 1500	Exit mod. 1800	Exit mod. 2200	Exit mod. 2700
QK 2500 - QK 2500 AS6	€	€	□	□	□	●	€	€
QK 2500 V - QK 2500 V AS6	€	€	□	□	□	●	€	€
QK 3800 - QK 3800 AS6	€	€	□	□	□	●	€	€
QK 3800 V - QK 3800 V AS6	€	€	□	□	□	●	€	€
QK 4200 - QK 4200 AS6	€	€	□	□	□	●	€	€
QK 4200 V - QK 4200 V AS6	€	€	□	□	□	●	€	€
QK 5400 - QK 5400 AS6	€	€	□	□	□	●	€	€
QK 5400 V - QK 5400 V AS6	€	€	□	□	□	●	€	€
QK 6000 - QK 6000 AS6	€	€	□	□	□	●	€	€
QK 6000 V - QK 6000 V AS6	€	€	□	□	□	●	€	€
QK 6800 - QK 6800 AS6	€	€	□	□	□	□	●	€
QK 6800 V - QK 6800 V AS6	€	€	□	□	□	□	●	€
QK 7800 - QK 7800 AS6	€	€	□	□	□	□	●	€
QK 7800 V - QK 7800 V AS6	€	€	□	□	□	□	●	€

	Description	Capacity	Dimensions	Code	
	NARROW MESH CUTLERY BASKET		500x500x106 H	C 41	
	LARGE MESH BASKET	For glasses	500x500x105 H	C 44	
	HOLDER FOR GLASS SUPPORT	For glass support (C112-C113-C114)	500x500x50 H	C 111	
	GLASS SUPPORT	5x5 Glass Ø 87 mm (C111)	500x500x50 H	C 112	
	GLASS SUPPORT	4x4 Glass Ø 110 mm (C111)	500x500x50 H	C 113	
	GLASS SUPPORT	6x6 Glass Ø 72 mm (C111)	500x500x50 H	C 114	
	CUTLERY BASKET		490x180x140 H	C 47	

KROMO

FLIGHT - TYPE
DISHWASHERS



KROMO ALI GROUP SRL
Via Mestre, 3
31033 Castelfranco Veneto (TV)

T: +39 0423 734580
kromo@kromo-ali.com

SERVICE:
T: +39 0423 734593
E: service@kromo-ali.com

www.kromo-ali.com

Edition 05.2024

an Ali Group Company



The Spirit of Excellence