



RK UP

RACK CONVEYOR DISHWASHERS
WITH SINGLE OR DOUBLE RINSE

KROMO
YOUR SMART WASH



Kromo introduces RK UP with single rinse. This new range of rack conveyor dishwashers, thanks to the new single tank configuration, meets the DIN 10512 norm with a contact of 90 seconds.

Combined with numerous accessories, this new line of RK UP offers personalized solutions for all demands.



FEATURES


STANDARD

- Double-skin, insulated and counterbalanced doors, equipped with anti-drop safety system
- Ergonomic handles
- Thermo barrier system for comfort in use
- Acid proof AISI 316 stainless steel radial wash tanks
- CLEAN+ filters
- Self-cleaning vertical wash pumps, protected from electrical overloads
- Wash arms ALL-IN-1
- CPF System
- Side traction system with built-in clutch
- DRIVE speed variator with 5 speeds
- Use economizer
- Acid proof AISI 316 stainless steel boilers, fully insulated to reduce thermal loss
- Autotimer switching off the rack conveyor motor and all electrical options after a preset lapse of inactivity
- Single rinse R with limited consumptions
- Control panel with IPX5 membrane keyboard

OPTIONS

- Linear and 90°/180° corner drying modules, power 4,5 kW or 9 kW (double skin dryer available for linear models only)
- Steam condenser (KSC10)
- Two models of heat recovery to be chosen according to the type of machine (compact or with integrated heat pump)
- Detergent dispenser with probe or dispensers kit
- Booster pump
- Hydraulic security system Break Tank
- Extra power for the boiler
- Thermal and acoustic insulation
- Stainless steel pumps
- Centralized drain 1-DRAIN
- Delivery in 2 or more parts to facilitate handling
- Machine sanitization also with dedicated booster pump
- Variable speed inverter "drive" with 5 speeds

Model	Voltage	Capacity	Poids	Code
RK 1020 E 5 SPEEDS <i>IMPROVED</i>	400 V 3N ~ 50 Hz 19,7 kW	Ø 450 500x500 80*-112 racks/h	1900x805x 1830/2120 H 300 kg GN 1/1 530x325x25 H	RK 1020 E

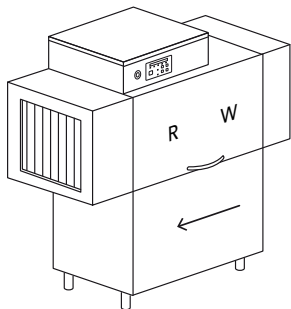

RACK EQUIPMENT





- 1 X C40
- 1 X C43
- 1 X C44
- 1 X C47

- P** Prewash
- W** Wash
- R** Single rinse

OPTIONS

Model	220-240 V 3 50 Hz	380-415 V 3N 50 Hz	60 Hz	PRE DOS Kromo disp. connections	DDE-GROUP Dispensers kit	DOS/S Dispenser with Probe	SAN Sanitization	PAP-SAN Booster Pump Sanitiz.	DWI Thermoacoustic Insulation	PAP Booster pump
RK 1020 E	€	●	+3%	●	€	€	€	€	€	€
RK 1420 E	€	●	+3%	●	€	€	€	€	€	€

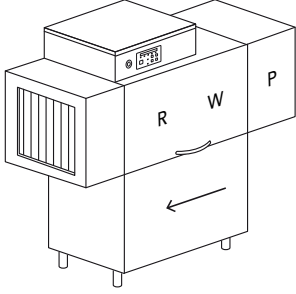- Standard
- Not available
- E** Settable electronic panel
- DDE-GROUP** Both detergent with probe and rinse-aid dispensers included
- DOS/S** For detergent dispenser only
- SAN** Including dosing system for sanitizing product
- DWI** Insulation option for the tunnel only, dryer excluded. Shelf dryer can be insulated upon request. Recommended with KHR10 – KHRP40
- DIV** Only splash guards removable
- XP** In case of cold water supply for rinse (8-55 °C) and without any heat recovery, the extra power option is mandatory

Model	Voltage	Capacity	Poids	Code
RK 1420 E 5 SPEEDS IMPROVED 	400 V 3N ~ 50 Hz 19,7 kW	 Ø 450  500x500 93-144 racks/h 119* racks/h	2100x805x 1830/2120 H 310 kg  530x325x25 H	RK 1420 E
RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47				

* Productivity according to DIN SPEC 10534 (contact time)

	DRIVE	AUTOTIMER	BT	DVGW	XP	DIV	PI	1-DRAIN
Model	Smart drive	Autotimer	Break Tank	DVGW	Extra Power	Price for division	S/S Pumps	Centralized Drain
RK 1020 E	●	●	€	€	€	€	€	●
RK 1420 E	●	●	€	€	€	€	€	●

- PI** Available with 50 Hz frequency only
- DVGW** Not available with heat recovery or steam condenser
- BT** Booster pump included
- DRIVE** Check voltage compatibility

With osmotic water supply and electrical conductivity lower than 200 microsiemens, it is mandatory to install a stainless steel heat exchanger

We recommend to install the machine in a well ventilated room, with a properly sized steam exhausting system

Peak-cut connect upon request

Warm water supply 55 °C

EAC label upon request






Option compatibility to be confirmed by the manufacturer after verification

	KSC10	KHR10	KHRP40	KDR64	KDR69	KDR94
Model	Steam condenser	Heat recovery	Heat recovery	Dryer + 400 mm 4,5 kW	Dryer + 400 mm / 9 kW	Dryer + 700 mm / 4,5 kW
RK 1020 E	€	€	€	€	€	€
RK 1420 E	€	€	----	€	€	€

- Standard
- Not available
- E** Settable electronic panel

KHRP40 Available with 400 V 3N 50 Hz frequency only

KHR10 - KHRP40 In case of cold water supply for rinse (8-15 °C), we recommend to install the heat recovery system optional. Extra power included



KSC10
Steam condenser

KHR10
Compact Heat recovery

KHRP40
Heat recovery with heat pump

KDR64 4,5 kW Electric
KDR69 9 kW Electric
Dryer

KDR94 4,5 kW Electric
KDR99 9 kW Electric
Dryer

	KDR99	KDRA94MC	KDRA99MC	KDRA184MC	KDRA189MC	ID
Model	Dryer + 700 mm / 9 kW	Mechanized dryer 90° arc 4,5 kW	Mechanized dryer 90° arc 9 kW	Mechanized dryer 180° arc 4,5 kW	Mechanized dryer 180° arc 9 kW	Double skin for dryer
RK 1020 E	€	€	€	€	€	€
RK 1420 E	€	€	€	€	€	€

ID Recommended for KDR69 - KDR99. Not available for corner dryers

KM22 - KM23 Available on entry or exit connections, one per layout





KDRA184MC - KDRA189MC Mandatory division

KDR64 - KDR94 - KDRA94MC - KDRA184MC Verify feasibility with manufacturer

KDRA94MC - KDRA99MC - KDRA184MC - KDRA189MC Available only without KM22 - KM23 on entry

Option compatibility to be confirmed by the manufacturer after verification

AVAILABLE ARCS:





K21 K21 1300x1300x860 H
90° roller arc with tank

K25 700x610x820 H
Angle loading table
complete with basket
pull-through system

KM22 850x850x885 H
90° mechanized arc
(clockwise/counter-clockwise)
to be used with original Kromo
racks only

KM23 850x1500x885 H
180° mechanized arc
(clockwise/counter-clockwise)
to be used with original Kromo
racks only



KDRA94MC 4,5 kW Electric
KDRA99MC 9 kW Electric
Dryer with mechanized arc 90°
to be used with original Kromo
racks only

KDRA184MC 4,5 kW Electric
KDRA189MC 9 kW Electric
Dryer with mechanized arc 180°
to be used with original Kromo
racks only



Kromo presents the RK UP line of rack conveyor dishwashers with double rinse: a range of models with multiple accessories to offer tailor-made solutions for any customer needs.

Thanks to the efficient pre-rinse and rinse system, we have achieved a radical reduction in water consumption, up to using approximately one liter of water per basket only.

Pre-rinse saves water, rinse-aid and electricity because the water used for rinsing is collected and sent to the pre-rinse arms.. This result, besides respecting the environment, significantly saves chemicals and reduces the need for energy.



CONTROL PANEL

The RK UP control panel with IPX5 membrane keyboard, allows both technicians and users to obtain comprehensive and detailed information on the machine operation. Its display with scrolling text provides data about the current status of the machine, such as boiler and tank temperatures, main alert codes and various programmable settings. The user-friendly control board, combined with the clear set of information provided to the user, make of Kromo display a reliable and effective control device for our machine.








FEATURES









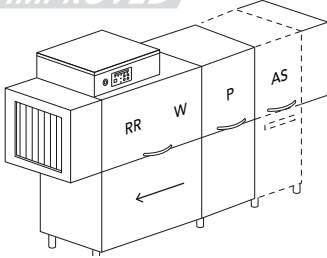







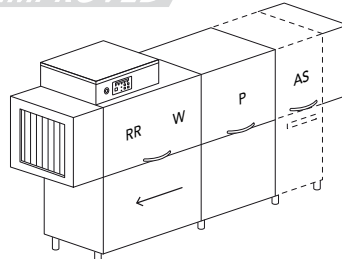



STANDARD

- Electromechanical control panel
- Improved double rinse RR, more effective and with limited consumptions
- Double lateral drive system with incorporated clutch
- DRIVE speed variator with 3 speeds on the electromechanical versions and 5 speeds on the electronic versions

OPTIONS

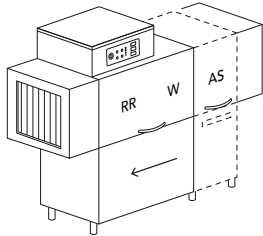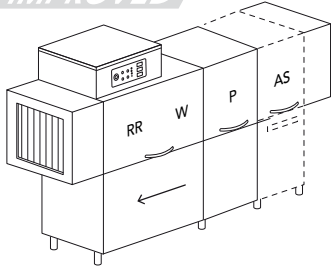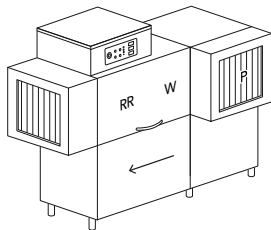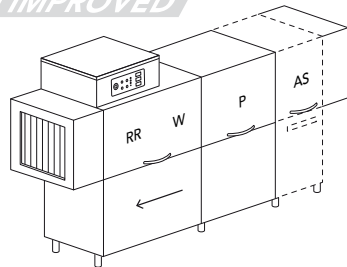- Control panel with IPX5 membrane keyboard
- Linear and 90°/180° corner drying modules, power 4,5 kW or 9 kW (double skin dryer available for linear models only)
- Steam condenser (KSC10)
- Three models of heat recovery to be chosen according to the type of machine (compact, standard, or with built-in heat pump)
- Detergent dispenser with probe or dispensers kit
- Booster pump
- Water pressure security system Break Tank
- Extra power for the boiler
- Thermal and acoustic insulation
- Stainless steel pumps
- Centralized drain 1-DRAIN
- Variable speed inverter "drive" with 5 speeds (electronic version).
- Delivery in 2 or more parts to facilitate handling
- Machine sanitization (for electronic versions only) with dedicated booster pump

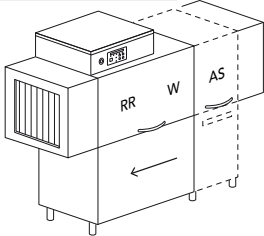Model	Speeds	Voltage	Capacity	Poids	Code
RK 1040	3 SPEEDS				
IMPROVED					
	RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47	400 V 3N ~ 50 Hz 19,90 kW	Ø 450 500x500 80*-112 rack/h	1900x805 1830/2120 H 245 kg AS + 450 mm GN 1/1 530x325x25H	RK 1040 RK 1040 AS
RK 1440	3 SPEEDS				
IMPROVED					
	RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47	400 V 3N ~ 50 Hz 20,60 kW	Ø 450 500x500 93*-144 rack/h	2100x805 1830/2120 H 270 kg GN 1/1 530x325x25H	RK 1440
RK 1840	3 SPEEDS				
IMPROVED					
	RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47	400 V 3N ~ 50 Hz 23,82 kW	Ø 450 500x500 115*-192 rack/h	2500x805 1830/2120 H 355 kg AS + 450 mm GN 1/1 530x325x25H	RK 1840 RK 1840 AS
RK 1840-K10	3 SPEEDS - CORNER PREWASH				
IMPROVED					
	RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47	400 V 3N ~ 50 Hz 23,82 kW	Ø 450 500x500 115-192 rack/h	2225x985 1830/2120 H 355 kg GN 1/1 530x325x25H	RK 1840-K10
RK 2440	3 SPEEDS				
IMPROVED					
	RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47	400 V 3N ~ 50 Hz 28,10 kW	Ø 450 500x500 132*-240 rack/h	2800x805 1830/2120 H 395 kg AS + 450 mm GN 1/1 530x325x25H	RK 2440 RK 2440 AS
P	Prewash	K10	Corner prewash		
W	Wash	AS	Automatic shower with filter drawer +450 mm		
RR	Pre-rinse + rinse	S	Soaking		

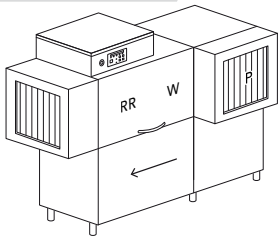Model	Voltage	Capacity	Poids	Code	
RK 1040 E 5 SPEEDS <i>IMPROVED</i> 	RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47	400 V 3N ~ 50 Hz 19,90 k	 Ø 450  500x500 80*-112 (with AS 107**) rack/h	1900x805 1830/2120 H 245 kg AS + 450 mm  530x325x25H	RK 1040 E RK 1040 E AS
RK 1440 E 5 SPEEDS <i>IMPROVED</i> 	RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47	400 V 3N ~ 50 Hz 20,60 kW	 Ø 450  500x500 93*-144 rack/h	2100x805 1830/2120 H 270 kg AS + 450 mm  530x325x25H	RK 1440 E
RK 1840 E 5 SPEEDS <i>IMPROVED</i> 	RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47	400 V 3N ~ 50 Hz 23,82 kW	 Ø 450  500x500 115*-192 rack/h	2500x805 1830/2120 H 355 kg AS + 450 mm  530x325x25H	RK 1840 E RK 1840 E AS
RK 1840 E-K10 5 SPEEDS - CORNER PREWASH <i>IMPROVED</i> 	RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47	400 V 3N ~ 50 Hz 23,82 kW	 Ø 450  500x500 115-192 rack/h	2225x985 1830/2120 H 355 kg AS + 450 mm  530x325x25H	RK 1840 E-K10
RK 2440 E 5 SPEEDS <i>IMPROVED</i> 	RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47	400 V 3N ~ 50 Hz 28,10 kW	 Ø 450  500x500 132*-240 rack/h	2800x805 1830/2120 H 395 kg AS + 450 mm  530x325x25H	RK 2440 E RK 2440 E AS

* Productivity according to DIN SPEC 10534 (contact time)

OPTIONS

Model	PRE DOS DDE-GROUP			DOS/S	SAN	PAP-SAN	KSC10	KHR10	KHR20	KHRP40		
	220-240 V3 50 Hz	380-415 V 3N 50 Hz	60 Hz	Kromo disp. connections	Dispensers kit	Dispenser with Probe	Sanitization	Booster Pump Sanitiz.	Steam condenser	Heat recovery	Heat recovery	Heat recovery
RK 1040	€	●	+3%	●	€	€	----	----	€	€	----	----
RK 1040 AS	€	●	+3%	●	€	€	----	----	€	€	----	----
RK 1040 E*	€	●	+3%	●	€	€	€	€	€	€	----	€
RK 1040 E AS	€	●	+3%	●	€	€	€	€	€	€	----	€
RK 1440	€	●	+3%	●	€	€	----	----	€	€	----	----
RK 1440 E	€	●	+3%	●	€	€	€	€	€	€	----	€
RK 1840	€	●	+3%	●	€	€	----	----	€	€	€	----
RK 1840 AS	€	●	+3%	●	€	€	----	----	€	€	€	----
RK 1840 E	€	●	+3%	●	€	€	€	€	€	€	€	----
RK 1840 E AS	€	●	+3%	●	€	€	€	●	€	€	€	----
RK 1840-K10	€	●	+3%	●	€	€	----	----	€	€	----	----
RK 1840 E-K10	€	●	+3%	●	€	€	€	€	€	€	----	----
RK 2440	€	●	+3%	●	€	€	----	----	€	€	€	----
RK 2440 AS	€	●	+3%	●	€	€	----	----	€	€	€	----
RK 2440 E*	€	●	+3%	●	€	€	€	€	€	€	€	----
RK 2440 E AS	€	●	+3%	●	€	€	€	●	€	€	€	----


● Standard

---- Not available

E Settable electronic panel


KHRP40 Available with 400 V 3N 50 Hz frequency only

KHR10 - KHR20 - KHRP40 In case of cold water supply for rinse (8-15 °C), we recommend to install the heat recovery system optional. Extra power included




KSC10

Steam condenser




KHR10

Compact Heat recovery



KHR20

Heat recovery



KHRP40

Heat recovery with heat pump

	DWI	PAP	DRIVE	AUTOTIMER	BT	DVGW	XP	DIV	PI	1-DRAIN
Model	Thermo-acoustic Insulation	Booster pump	Smart drive	Autotimer	Break Tank	DVGW	Extra Power	Price for division	S/S Pumps	Centralized Drain
RK 1040	€	€	●	----	----	----	€	€	€	€
RK 1040 AS	€	€	●	----	----	----	€	€	€	€
RK 1040 E*	€	€	●	●	€	€	€	€	€	€
RK 1040 E AS	€	€	●	●	€	€	€	€	€	€
RK 1440	€	€	●	----	----	----	€	€	€	€
RK 1440 E	€	€	●	●	€	€	€	€	€	€
RK 1840	€	€	●	----	----	----	€	€	€	€
RK 1840 AS	€	€	●	----	----	----	€	€	€	€
RK 1840 E	€	€	●	●	€	€	€	€	€	€
RK 1840 E AS	€	€	●	●	€	€	€	€	€	€
RK 1840-K10	€	€	●	----	----	----	€	€	€	€
RK 1840 E-K10	€	€	●	●	€	€	€	€	€	€
RK 2440	€	€	●	----	----	----	€	€	€	€
RK 2440 AS	€	€	●	----	----	----	€	€	€	€
RK 2440 E*	€	€	●	●	€	€	€	€	€	€
RK 2440 E AS	€	€	●	●	€	€	€	€	€	€

+ Not available for K10 version if the machine is next to the wall

***** Construction according to UL-NSF standards upon request

DDE-GROUP Both detergent and rinse-aid dispensers included (with probe)

DOS/S For detergent dispenser only

SAN Including dosing system for sanitizing product

DWI Insulation option for the tunnel only, dryer excluded. Shelf dryer can be insulated upon request. Recommended with KHR10 – KHR20 – KHRP40

DRIVE Check voltage compatibility

BT Booster pump included

DIV For models RK 1040, RK 1040 E, only splash guards removable

PI Available with 50 Hz frequency only. Not available for AS module

DVGW Not available with heat recovery or steam condenser
Components prescribed by DVGW on request (check option compatibility with the manufacturer)

XP In case of cold water supply for rinse (8-55 °C) and without any heat recovery, the extra power option is mandatory

With osmotic water supply and electrical conductivity lower than 200 microsiemens, it is mandatory to install a stainless steel heat exchanger

Peak-cut connect upon request

Warm water supply 55 °C

We recommend to install the machine in a well ventilated room, with a properly sized steam exhausting system

Option compatibility to be confirmed by the manufacturer after verification





OPTIONS

	KDR64	KDR69	KDR94	KDR99
Model	Dryer + 400 mm / 4,5 kW	Dryer + 400 mm / 9 kW	Dryer + 700 mm / 4,5 kW	Dryer + 700 mm / 9 kW
RK 1040	€	€	€	€
RK 1040 AS	€	€	€	€
RK 1040 E *	€	€	€	€
RK 1040 E AS	€	€	€	€
RK 1440	€	€	€	€
RK 1440 E	€	€	€	€
RK 1840	€	€	€	€
RK 1840 AS	€	€	€	€
RK 1840 E	€	€	€	€
RK 1840 E AS	€	€	€	€
RK 1840-K10	€	€	€	€
RK 1840 E-K10	€	€	€	€
RK 2440	€	€	€	€
RK 2440 AS	€	€	€	€
RK 2440 E *	€	€	€	€
RK 2440 E AS	€	€	€	€

ID Recommended for KDR69 - KDR99. Not available for corner dryers

***** Construction according to UL-NSF standards upon request

KDR64 - KDR94 - KDRA94MC - KDRA184MC With the models Rk 1840 and Rk 2440. Verify with manufacturer



KDR64 4,5 kW Electric
KDR69 9 kW Electric
Dryer

KDR94 4,5 kW Electric
KDR99 9 kW Electric
Dryer

KDRA94MC 4,5 kW Electric
KDRA99MC 9 kW Electric
Dryer with mechanized arc 90° to be used with original Kromo racks only

KDRA184MC 4,5 kW Electric
KDRA189MC 9 kW Electric
Dryer with mechanized arc 180° to be used with original Kromo racks only


	KDRA94MC	KDRA99MC	KDRA184MC	KDRA189MC	ID
Model	Mechanized dryer 90° arc 4,5 kW	Mechanized dryer 90° arc 9 kW	Mechanized dryer 180° arc 4,5 kW	Mechanized dryer 180° arc 9 kW	Double skin Dryer
RK 1040	€	€	€	€	€
RK 1040 AS	€	€	€	€	€
RK 1040 E *	€	€	€	€	€
RK 1040 E AS	€	€	€	€	€
RK 1440	€	€	€	€	€
RK 1440 E	€	€	€	€	€
RK 1840	€	€	€	€	€
RK 1840 AS	€	€	€	€	€
RK 1840 E	€	€	€	€	€
RK 1840 E AS	€	€	€	€	€
RK 1840-K10	€	€	€	€	€
RK 1840 E-K10	€	€	€	€	€
RK 2440	€	€	€	€	€
RK 2440 AS	€	€	€	€	€
RK 2440 E *	€	€	€	€	€
RK 2440 E AS	€	€	€	€	€

KM22 - KM23 Available on entry or exit connections, one per layout


KDRA184MC - KDRA189MC Mandatory division

KDRA94MC - KDRA99MC - KDRA184MC - KDRA189MC Available only without KM22 - KM23 on entry


AVAILABLE ARCS:




K21 K21 1300x1300x860 H
90° roller arc with tank













K25 700x610x820 H
Angle loading table
complete with basket
pull-through system






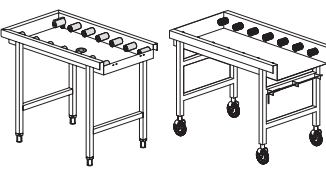
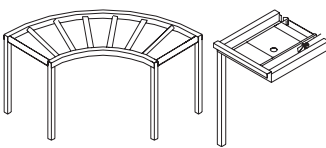
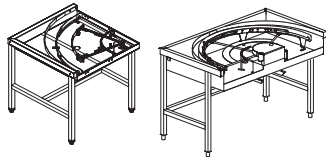


KM22 850x850x885 H
90° mechanized arc
(clockwise/counter-clockwise)
to be used with original Kromo
racks only



KM23 850x1500x885 H
180° mechanized arc
(clockwise/counter-clockwise)
to be used with original Kromo
racks only

	Description	Capacity	Dimensions	Code	€
	PLATE BASKET	18 Plates	500x500x105 H	C 40	
	GLASS BASKET WITH GLASS SUPPORT AND ANTI-TIPPING LID		500x500x235 H	C 135	
	LARGE MESH BASKET	For glasses	500x500x105 H	C 44	
	HOLDER FOR GLASS SUPPORT	For glass support (C112-C113-C114)	500x500x50 H	C111	
	GLASS SUPPORT	5x5 Glass Ø 87 mm (C111)	500x500x50 H	C 112	
	GLASS SUPPORT	4x4 Glass Ø 110 mm (C111)	500x500x50 H	C 113	
	GLASS SUPPORT	6x6 Glass Ø 72 mm (C111)	500x500x50 H	C 114	
	TRAYS BASKET	8 pcs max depth 25mm	500x500x105 H	C 43	
	CUTLERY BASKET		490x180x140 H	C 47	
	FLEXIBLE SHOWER complete with mixing group and lever tap, to be fixed to the wall		1000 H	K 1	
	FLEXIBLE SHOWER complete with mixing group and lever tap, to be fixed to the wall and intermediate tap		1000 H	K 1HR	

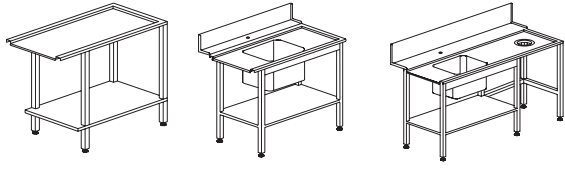	Description	Capacity	Dimensions	Code	€
	SHELF		1515x620x660 H	K 7M16*	
			2315x620x660 H	K 7M24*	
	GRADING TABLE WITH RUBBER RING	Waste hole and special dimensions upon request	1600x1000x850 H	K 7A/1600*	
			2400x1000x850 H	K 7A/2400*	
	MECHANIZED GRADING TABLE With mechanized basket advancement system	1 waste hole	1800x1240 1525 H	K M7/1800*	
		2 waste holes	2400x1240 1525 H	K M7/2400*	
	Sink 500x400x270 H	Standard rubber ring	1200x590x860 H	K 4B	
			1200x730x860 H	K 55	
	Sink 500x400x270 H	Standard rubber ring	1500x730x860 H	K 8	
			1800x730x860 H	K 9	
	ROLLER TABLE + sink, right or left version Sink 500x400x270 H		1600x730x860 H	K 195	
	LINER ROLLER TABLE WITH TANK		1100x650x860 H 1600x650x860 H 2100x650x860 H	K 19* K 19/B* K 19/C*	
		Option end microswitch		K 18	
	LINER ROLLER TABLE WITH TANK complete with end microswitch	Not compatible with same references Not on 180° arcs To be connected to LC77/3 only and to dryer on 180°	1100x650x860 H	K 19/1	
			1600x650x860 H	K 19/1A	
			1150x650x860 H	K 20/1	
			1650x650x860 H	K 20/1A	
	90° roller arc with tank (exit only with roller table)		1300x1300x860 H	K 21*	
	ANGLE LOADING TABLE complete with basket pull- through system	Option connection to prewash tables	700x610x820 H	K 25	
	90° mechanized arc clockwise/counter- clockwise, not available at the entry + LC version	Available on entry or exit connections, one per layout. To be used with original DIHR racks only	850x850x885 H	KM22*	
	180° mechanized arc (clockwise/counter- clockwise)		850x1500x885 H	KM23*	

* Wooden cage +2% minimum + € / Special dimensions for tables upon request / Tables shown in right-to-left version
We strongly recommend the presence of a roller table with end microswitch at the exit of our rack conveyor machines for a correct operation



KROMO ALI GROUP SRL

Via Mestre, 3
31033 Castelfranco Veneto (TV)
T: +39 0423 734580
F: +39 0423 734581
kromo@kromo-ali.com

SERVICE:

T: +39 0423 734593
F: +39 0423 734592
E: service@kromo-ali.com

www.kromo-ali.com

Edition 05.2023

an Ali Group Company



The Spirit of Excellence