


TECHNICAL DATA	STD	
EXTERNAL DIMENSIONS		
width	(inch)	23 1/4"
depth	(inch)	23 5/8"
height	(inch)	33 7/16"
WEIGHT	(lbs)	130
VOLTAGE		220 - 240 1 ph 60 Hz
POWER REQUIRED		7090 W
WATER HARDNESS		2-8 °F
INLET WATER PRESSURE (170 - 620 kPa)		25 - 90 PSI
CROCKERY DIMENSIONS		
plates diameter	(inch)	13 5/8"
dishes max. height	(inch)	12 5/8"
RACK DIMENSIONS	(inch)	20" x 20"
RACK EQUIPMENT		1XC40 - 1XC44 - 1X15060
WASHING CYCLES	(s)	1 (120) 2 (180)
WATER SUPPLY 131°F		
racks/h(*) ⁽¹⁾	30	20
WATER SUPPLY 50°F		
racks/h(*) ⁽¹⁾	21	20
WATER CONSUMPTION / CYCLE (rinse pressure 15 PSI)	[gal(US)]	0,74
BOOSTER CAPACITY	[gal(US)]	1,51
BOOSTER HEATING ELEMENT		6530 W
RINSING TEMPERATURE (SET)		185°F
TANK CAPACITY	[gal(US)]	7,66
TANK HEATING ELEMENT		2940 W
TANK TEMPERATURE (SET)		160°F
PUMP POWER		560 W (89,8 gal(US)/min ^{***})
DRAIN PUMP		43W hMAX 31 1/2"(10,78 gal(US)/min ^{***})
NOISE		63 dB(A)

(*) STANDARD TERMOSTOP

(***) MAXIMUM FLOW RATE

¹⁾ In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.

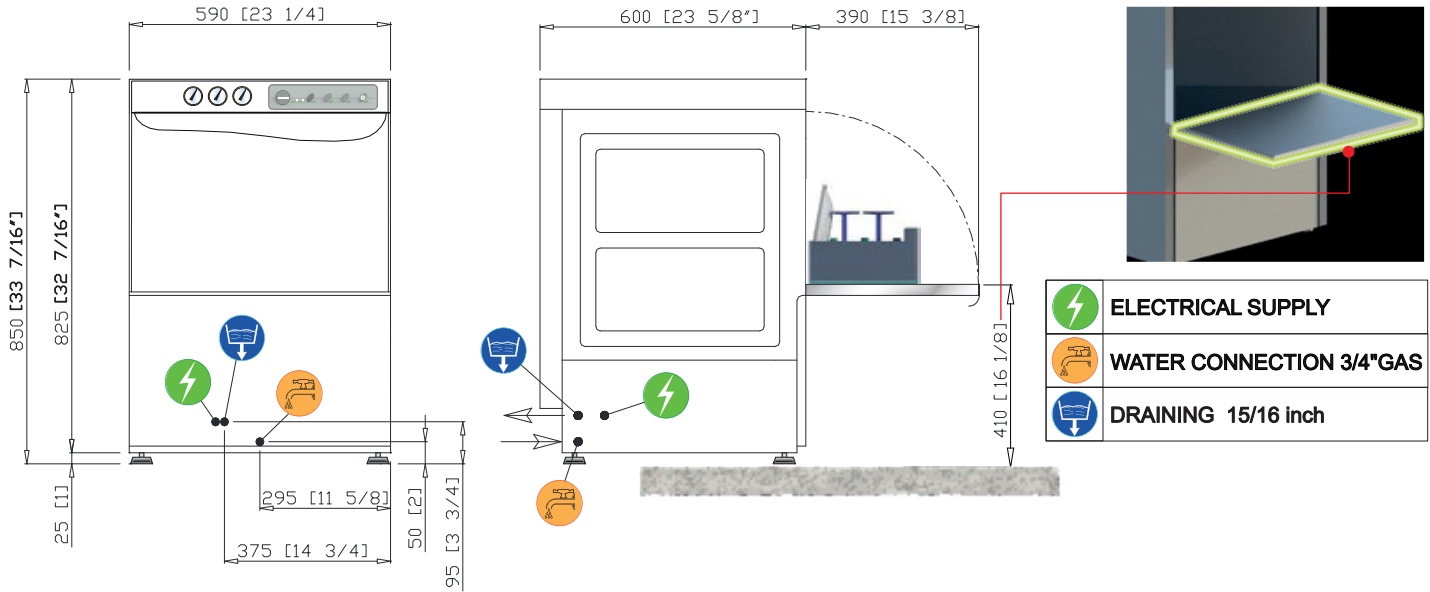

	ELECTRICAL SUPPLY
	WATER CONNECTION 3/4" GAS
	DRAINING 15/16 inch

TECHNICAL DATA		STD	
EXTERNAL DIMENSIONS			
width	(inch)	23 1/4"	
depth	(inch)	23 5/8"	
height	(inch)	33 7/16"	
WEIGHT	(lbs)	130	
VOLTAGE		220 - 240 3 ph 60 Hz	
POWER REQUIRED		7090 W	
WATER HARDNESS		2-8 °F	
INLET WATER PRESSURE (170 - 620 kPa)		25 - 90 PSI	
CROCKERY DIMENSIONS			
plates diameter	(inch)	13 5/8"	
dishes max. height	(inch)	12 5/8"	
RACK DIMENSIONS	(inch)	20" x 20"	
RACK EQUIPMENT		1XC40 - 1XC44 - 1X15060	
WASHING CYCLES	(s)	1 (120)	2 (180)
WATER SUPPLY 131°F			
racks/h(*) ⁽¹⁾		30	20
WATER SUPPLY 50°F			
racks/h(*) ⁽¹⁾		21	20
WATER CONSUMPTION / CYCLE (rinse pressure 15 PSI)	[gal(US)]	0,74	
BOOSTER CAPACITY	[gal(US)]	1,51	
BOOSTER HEATING ELEMENT		6530 W	
RINSING TEMPERATURE (SET)		185°F	
TANK CAPACITY	[gal(US)]	7,66	
TANK HEATING ELEMENT		2940 W	
TANK TEMPERATURE (SET)		160°F	
PUMP POWER		560 W (89,8 gal(US)/min***)	
DRAIN PUMP		43W hMAX 31 1/2"(10,78 gal(US)/min***)	
NOISE		63 dB(A)	

(*) STANDARD THERMOSTOP

(***) MAXIMUM FLOW RATE

¹⁾ In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.