


TECHNICAL DATA		STANDARD	
<b>EXTERNAL DIMENSIONS</b>			
width	(inch)	23 7/16"	
depth	(inch)	24"	
height	(inch)	33 5/16"	
WEIGHT	(lbs)	134,5	
VOLTAGE		220V-240V 1 ph 60Hz	
POWER REQUIRED		7090 W	
WATER HARDNESS		2-8 °F	
INLET WATER PRESSURE ( 170 - 620 kPa )		25 - 90 PSI	
<b>CROCKERY DIMENSIONS</b>			
plates diameter	(inch)	12 13/16"	
dishes max. height	(inch)	12 3/16"	
RACK DIMENSIONS	(inch)	20" x 20"	
RACK EQUIPMENT		1XC40 - 1XC44 - 1X15060	
WASHING CYCLES	(s)	1 (120)	2 (180)
<b>WATER SUPPLY 131°F</b>			
racks/h(*) <sup>(1)</sup>		30	20
<b>WATER SUPPLY 50°F</b>			
racks/h(*) <sup>(1)</sup>		21	20
WATER CONSUMPTION / CYCLE (rinse pressure 15 PSI)	[gal(US)]	0,74	
BOOSTER CAPACITY	[gal(US)]	1,5	
BOOSTER HEATING ELEMENT		6530 W	
RINSING TEMPERATURE (SET)		185°F	
TANK CAPACITY	[gal(US)]	7,13	
TANK HEATING ELEMENT		2940 W	
TANK TEMPERATURE (SET)		160°F	
PUMP POWER		560 W (89,8 gal(US)/min <sup>***</sup> )	
DRAIN PUMP		43W hMAX 31 1/2"(10,78 gal(US)/min <sup>***</sup> )	
NOISE		59.3 dB(A)	

(\*) STANDARD TERMOSTOP

(\*\*) MAXIMUM FLOW RATE

In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.

<sup>(1)</sup> In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.

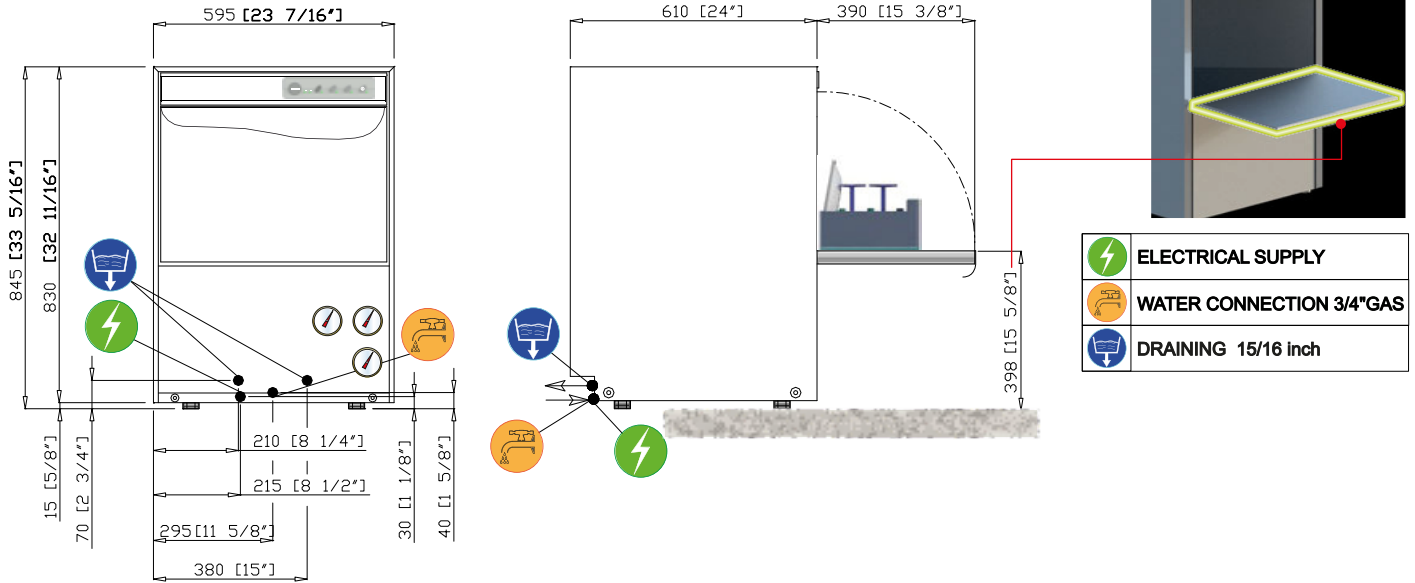

	ELECTRICAL SUPPLY
	WATER CONNECTION 3/4" GAS
	DRAINING 15/16 inch

TECHNICAL DATA		STANDARD	
<b>EXTERNAL DIMENSIONS</b>			
width	(inch)	23 7/16"	
depth	(inch)	24"	
height	(inch)	33 5/16"	
WEIGHT	(lbs)	134,5	
VOLTAGE		220V-240V 3 ph 60Hz	
POWER REQUIRED		7090 W	
WATER HARDNESS		2-8 °F	
INLET WATER PRESSURE ( 170 - 620 kPa )		25 - 90 PSI	
<b>CROCKERY DIMENSIONS</b>			
plates diameter	(inch)	12 13/16"	
dishes max. height	(inch)	12 3/16"	
RACK DIMENSIONS	(inch)	20" x 20"	
RACK EQUIPMENT		1XC40 - 1XC44 - 1X15060	
WASHING CYCLES	(s)	1 (120)	2 (180)
<b>WATER SUPPLY 131°F</b>			
racks/h(*) <sup>(1)</sup>		30	20
<b>WATER SUPPLY 50°F</b>			
racks/h(*) <sup>(1)</sup>		21	20
WATER CONSUMPTION / CYCLE (rinse pressure 15 PSI)	[gal(US)]	0,74	
BOOSTER CAPACITY	[gal(US)]	1,5	
BOOSTER HEATING ELEMENT		6530 W	
RINSING TEMPERATURE (SET)		185°F	
TANK CAPACITY	[gal(US)]	7,13	
TANK HEATING ELEMENT		2940 W	
TANK TEMPERATURE (SET)		160°F	
PUMP POWER		560 W (89,8 gal(US)/min <sup>***</sup> )	
DRAIN PUMP		43W hMAX 31 1/2"(10,78 gal(US)/min <sup>***</sup> )	
NOISE		59.3 dB(A)	

(\*) STANDARD TERMOSTOP

(\*\*) MAXIMUM FLOW RATE

In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.

<sup>(1)</sup> In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.