

| | |
|--|---------------------------|
| | ELECTRICAL SUPPLY |
| | WATER CONNECTION 3/4" GAS |
| | DRAINING 15/16 inch |


| TECHNICAL DATA | | STANDARD | |
|---|-----------|---|---------|
| EXTERNAL DIMENSIONS | | | |
| width | (inch) | 23 7/16" | |
| depth | (inch) | 24" | |
| height | (inch) | 33 5/16" | |
| WEIGHT | (lbs) | 134,5 | |
| VOLTAGE | | 220V-240V 1 ph 60Hz | |
| POWER REQUIRED | | 7090 W | |
| WATER HARDNESS | | 2-8 °F | |
| INLET WATER PRESSURE (170 - 620 kPa) | | 25 - 90 PSI | |
| CROCKERY DIMENSIONS | | | |
| plates diameter | (inch) | 12 13/16" | |
| dishes max. height | (inch) | 12 3/16" | |
| RACK DIMENSIONS | (inch) | 20" x 20" | |
| RACK EQUIPMENT | | 1XC40 - 1XC44 - 1X15060 | |
| WASHING CYCLES | (s) | 1 (120) | 2 (180) |
| WATER SUPPLY 131°F | | | |
| racks/h(*) ⁽¹⁾ | | 30 | 20 |
| WATER SUPPLY 50°F | | | |
| racks/h(*) ⁽¹⁾ | | 21 | 20 |
| WATER CONSUMPTION / CYCLE (rinse pressure 15 PSI) | [gal(US)] | 0,74 | |
| BOOSTER CAPACITY | [gal(US)] | 1,5 | |
| BOOSTER HEATING ELEMENT | | 6530 W | |
| RINSING TEMPERATURE (SET) | | 185°F | |
| TANK CAPACITY | [gal(US)] | 7,13 | |
| TANK HEATING ELEMENT | | 2940 W | |
| TANK TEMPERATURE (SET) | | 160°F | |
| PUMP POWER | | 560 W (89,8 gal(US)/min ^{***}) | |
| DRAIN PUMP | | 43W hMAX 31 1/2"(10,78 gal(US)/min ^{***}) | |
| NOISE | | 59.3 dB(A) | |

(*) STANDARD TERMOSTOP

(**) MAXIMUM FLOW RATE

In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.

⁽¹⁾ In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.

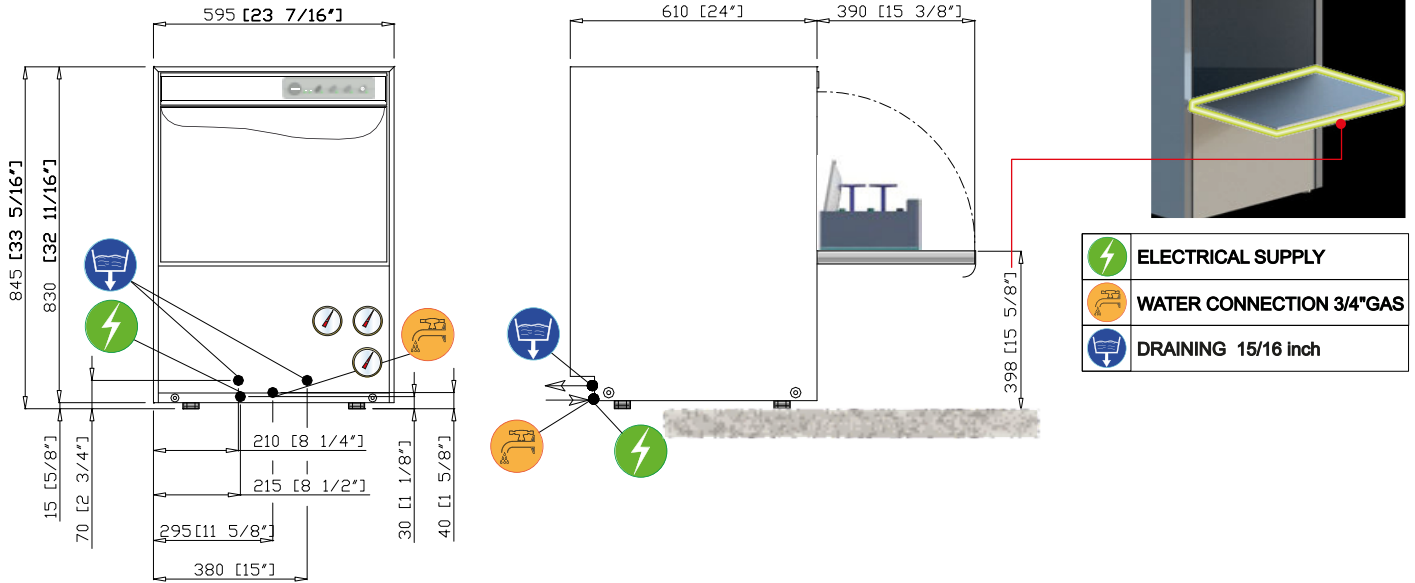

| | |
|--|---------------------------|
| | ELECTRICAL SUPPLY |
| | WATER CONNECTION 3/4" GAS |
| | DRAINING 15/16 inch |

| TECHNICAL DATA | | STANDARD | |
|---|-----------|---|---------|
| EXTERNAL DIMENSIONS | | | |
| width | (inch) | 23 7/16" | |
| depth | (inch) | 24" | |
| height | (inch) | 33 5/16" | |
| WEIGHT | (lbs) | 134,5 | |
| VOLTAGE | | 220V-240V 3 ph 60Hz | |
| POWER REQUIRED | | 7090 W | |
| WATER HARDNESS | | 2-8 °F | |
| INLET WATER PRESSURE (170 - 620 kPa) | | 25 - 90 PSI | |
| CROCKERY DIMENSIONS | | | |
| plates diameter | (inch) | 12 13/16" | |
| dishes max. height | (inch) | 12 3/16" | |
| RACK DIMENSIONS | (inch) | 20" x 20" | |
| RACK EQUIPMENT | | 1XC40 - 1XC44 - 1X15060 | |
| WASHING CYCLES | (s) | 1 (120) | 2 (180) |
| WATER SUPPLY 131°F | | | |
| racks/h(*) ⁽¹⁾ | | 30 | 20 |
| WATER SUPPLY 50°F | | | |
| racks/h(*) ⁽¹⁾ | | 21 | 20 |
| WATER CONSUMPTION / CYCLE (rinse pressure 15 PSI) | [gal(US)] | 0,74 | |
| BOOSTER CAPACITY | [gal(US)] | 1,5 | |
| BOOSTER HEATING ELEMENT | | 6530 W | |
| RINSING TEMPERATURE (SET) | | 185°F | |
| TANK CAPACITY | [gal(US)] | 7,13 | |
| TANK HEATING ELEMENT | | 2940 W | |
| TANK TEMPERATURE (SET) | | 160°F | |
| PUMP POWER | | 560 W (89,8 gal(US)/min ^{***}) | |
| DRAIN PUMP | | 43W hMAX 31 1/2"(10,78 gal(US)/min ^{***}) | |
| NOISE | | 59.3 dB(A) | |

(*) STANDARD TERMOSTOP

(**) MAXIMUM FLOW RATE

In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.

⁽¹⁾ In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.