


EXIT AIR TEMPERATURE : 27°C
 HUMIDITY: 90%
 AIR FLOW RATE: 200 m³/h
 RECOVERY PER HOUR: 3 kWh
 (VALUES CALCULATED ON THE BASE OF THE SHORTEST CYCLE)

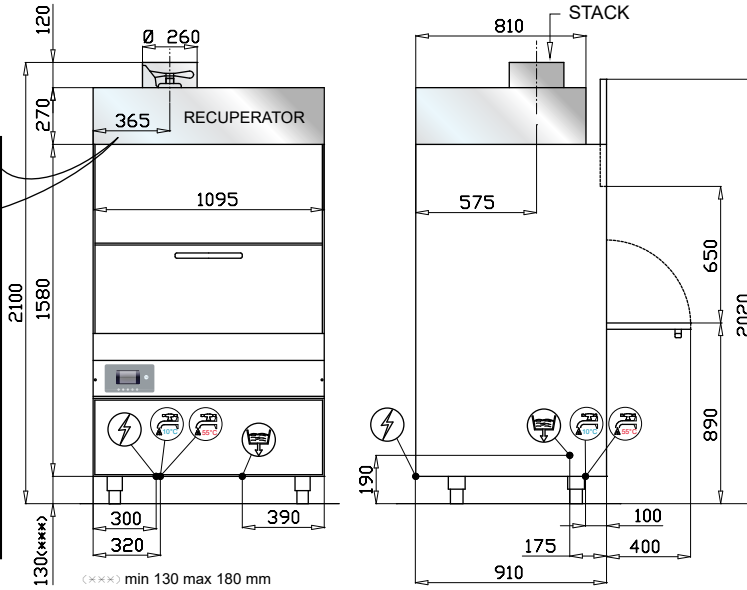

load capacity trays:
 -6 gn 1/1 max depth 65mm
 -3 gn 1/1 max depth 230mm
 -2 gn 2/1 max depth 140mm
 -1 gn 2/1 max depth 500mm

- HOT WATER CONNECTION 3/4" GAS MAX 55°C
- COLD WATER CONNECTION 3/4" GAS 10°C
- DRAIN PIPE Ø 32mm
- ELECTRICAL SUPPLY

TECHNICAL DATA						
EXTERNAL DIMENSIONS						
width	1095 mm					
depth	910 mm					
height	2100 mm					
WEIGHT(basic version)	320 kg					
VOLTAGE	400V 3N 50Hz					
POWER REQUIRED	12975 W					
WATER HARDNESS	< 8 °F					
WATER CONDUCTIBILITY	> 200 µS/cm					
INLET WATER PRESSURE	200-400 kPa					
CROCKERY DIMENSIONS						
trays max. height	635 mm					

RACK DIMENSIONS	Ø735Xh240 mm					
RACK EQUIPMENT	1X96100-1X96101-1X96102-1X96103-1X96104-1X96105-1X96135-4X96136					
WASHING CYCLES water/granules(Min)	1/2(5)	3/4(7)	5/6(9)	7/8(11)	9/10(13)	11/12(16)
WATER SUPPLY 55°C						
racks/h(*) ⁽¹⁾	-	-	-	-	-	-
WATER SUPPLY 15°C						
racks/h(*) ⁽¹⁾	12	8,5	6,5	5,5	4,5	3,5
WATER CONSUMPTION / CYCLE	4,4 L					
BOILER CAPACITY	20 L					
BOILER HEATING ELEMENT	9000 W					
RINSING TEMPERATURE (SET)	85°C					
TANK CAPACITY	103 L					
TANK HEATING ELEMENT	9000 W					
TANK TEMPERATURE (SET)	55°C					
WASHING PUMP POWER	3780 W (900 L/min ^{***})					
RINSING PUMP POWER	250 W (150 L/min ^{***})					
OPERATING NOISE	79 dB(A)					

(*) STANDARD TERMOSTOP

(***) MAXIMUM FLOW RATE

⁽¹⁾ In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.