





**EXIT AIR TEMPERATURE : 77°F**  
**HUMIDITY: 60%**  
**AIR FLOW RATE: 3700 Ft³/h**  
**HEAT RECOVERY PER HOUR: 2,7 kWh**  
 (VALUES CALCULATED ON THE BASIS OF THE SHORTEST CYCLE)

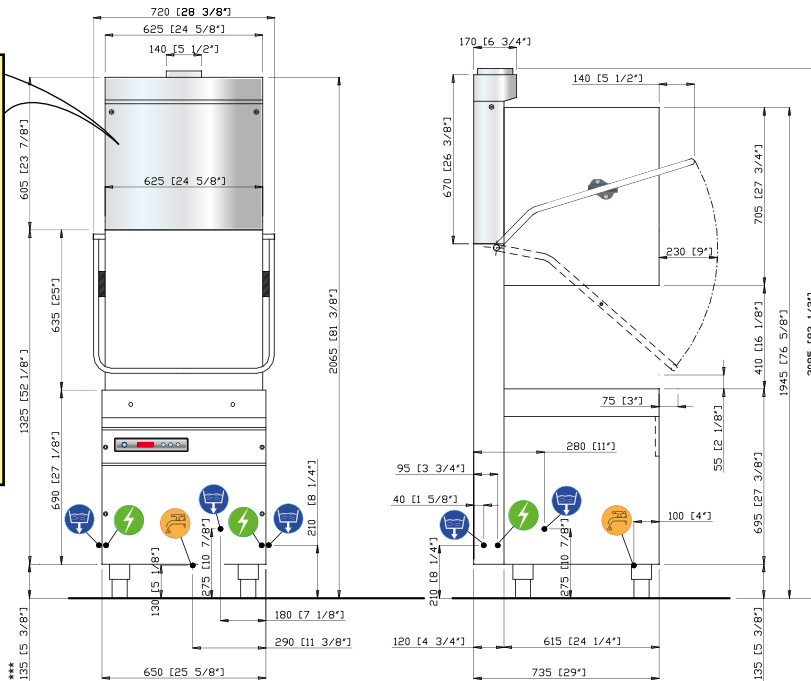

	WATER CONNECTION 3/4" G (NO OSMOTIC WATER)
	DRAINING 15/16 inch
	ELECTRICAL SUPPLY

(\*\*\*) MIN 5 3/8" - MAX 7 7/8"

TECHNICAL DATA					
<b>EXTERNAL DIMENSIONS</b>					
width	(inch)	28 3/8"			
depth	(inch)	29"			
height	(inch)	82 1/2"			
WEIGHT(basic version)	(lbs)	319,6			
VOLTAGE		220-240V 3ph 60Hz			
POWER REQUIRED	(W)	10750 W			
WATER HARDNESS		2-8 °F			
INLET WATER PRESSURE		25-90 PSI (170 - 620 ) KPa			
<b>CHINA DIMENSIONS</b>					
plates diameter	(inch)	16 1/8"			
trays max. dimension	(inch)	GASTRONORM 1/1 (20 7/8"x12 3/4")			
RACK DIMENSION	(inch)	20"x20"			
RACK EQUIPMENT		2XC40 - 1XC44 - 2X15060			
WASHING CYCLES (sec)	(s)	1 (120)	2 (180)	3 (240)	4 (300)   5 (360)
<b>WATER SUPPLY 50°F</b>					
racks/h(*) <sup>(1)</sup>		30	20	15	12   10
<b>WATER CONSUMPTION / CYCLE [gal(US)]</b>					
BOOSTER CAPACITY	[gal(US)]	3,96			
BOOSTER HEATING ELEMENT	(W)	9000 W			
RINSING TEMPERATURE (SET)		185°F			
TANK CAPACITY	[gal(US)]	11,1			
TANK HEATING ELEMENT		2700 W			
TANK TEMPERATURE (SET)		160°F			
PUMPS POWER washing / rinsing		1750W (211 gal(US)/min***)/250 W			
DRAIN PUMP		43 W h max 31 1/2"(10,78 gal(US)/min***)			

(\*) STANDARD THERMOSTOP

(\*\*\*) MAXIMUM FLOW RATE

(<sup>1</sup>) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.