

	WATER CONNECTION 3/4" G
	DRAINING 15/16 inch
	ELECTRICAL SUPPLY



(***) MIN 5 1/8" - MAX 7 7/8"

TECHNICAL DATA	
EXTERNAL DIMENSIONS	
width	(inch) 28 3/8"
depth	(inch) 28 15/16"
height	(inch) 56 7/8" - 74" (open hood)
WEIGHT	(lbs) 231
VOLTAGE	220/240V 1ph 60 Hz
POWER REQUIRED	10920 W
WATER HARDNESS	2 - 8 °F
INLET WATER PRESSURE (170 - 620 kPa)	25 - 90 PSI
CROCKERY DIMENSIONS	
plates diameter	(inch) 16 1/4"
trays max. dimension	(inch) GASTRONORM 1/1
RACK DIMENSION	(inch) 20" x 20"
RACK EQUIPMENT	2XC40 - 1XC44 - 2X15060
WASHING CYCLES	(s) 1 (120) 2 (180)
WATER SUPPLY 131°F	
racks/h(*)⁽¹⁾	30 20
WATER SUPPLY 50°F	
racks/h(*)⁽¹⁾	30 20
WATER CONSUMPTION / CYCLE (rinse pressure 17 Psi)	0,79
BOOSTER CAPACITY	2,66
BOOSTER HEATING ELEMENT	9800 W
RINSING TEMPERATURE (SET)	185°F
TANK CAPACITY	7,93
TANK HEATING ELEMENT	2940 W
TANK TEMPERATURE (SET)	160°F
PUMP POWER	1120 W (166 gal(US)/min***)
DRAIN PUMP	43W hMAX 31 1/2" (10,78 gal(US)/min***)
NOISE	63,6±0.7 dB(A)

(*) STANDARD TERMOSTOP

(***) MAXIMUM FLOW RATE

(¹) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.

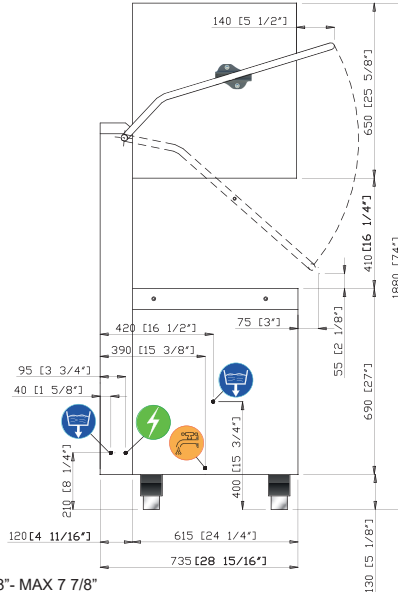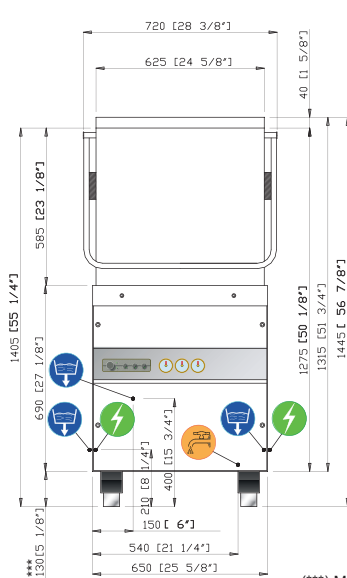

	WATER CONNECTION 3/4" G
	DRAINING 15/16 inch
	ELECTRICAL SUPPLY

(***) MIN 5 1/8" - MAX 7 7/8"

TECHNICAL DATA	
EXTERNAL DIMENSIONS	
width	(inch) 28 3/8"
depth	(inch) 28 15/16"
height	(inch) 56 7/8" - 74" (open hood)
WEIGHT	(lbs) 231
VOLTAGE	220/240V 3ph 60 Hz
POWER REQUIRED	10920 W
WATER HARDNESS	2 - 8 °F
INLET WATER PRESSURE (170 - 620 kPa)	25 - 90 PSI
CROCKERY DIMENSIONS	
plates diameter	(inch) 16 1/4"
trays max. dimension	(inch) GASTRONORM 1/1
RACK DIMENSION	(inch) 20" x 20"
RACK EQUIPMENT	2XC40 - 1XC44 - 2X15060
WASHING CYCLES	(s) 1 (120) 2 (180)
WATER SUPPLY 131°F	
racks/h(*) ⁽¹⁾	30 20
WATER SUPPLY 50°F	
racks/h(*) ⁽¹⁾	---- ----
WATER CONSUMPTION / CYCLE (rinse pressure 17 Psi)	[gal(US)] 0,79
BOOSTER CAPACITY	[gal(US)] 2,66
BOOSTER HEATING ELEMENT	9800 W
RINSING TEMPERATURE (SET)	185°F
TANK CAPACITY	[gal(US)] 7,93
TANK HEATING ELEMENT	2940 W
TANK TEMPERATURE (SET)	160°F
PUMP POWER	1120 W (166 gal(US)/min ^{***})
DRAIN PUMP	43W hMAX 31 1/2" (10,78 gal(US)/min ^{***})
NOISE	63,6±0.7 dB(A)

(*) STANDARD TERMOSTOP

(***) MAXIMUM FLOW RATE

(¹) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.