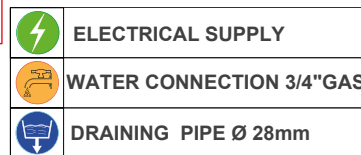

 PIEDINO "MARINA"
"MARINA" FOOT

TECHNICAL DATA
EXTERNAL DIMENSIONS

width	720 mm
depth	735 mm
height	2095 mm

WEIGHT(basic version) 145 kg

VOLTAGE 400V 3N 50Hz

POWER REQUIRED 10490 W

WATER HARDNESS < 8 °f

WATER CONDUCTIVITY > 200 µS/cm

INLET WATER PRESSURE 200-400 kPa

CROCKERY DIMENSIONS
plates diameter 410 mm

trays max. dimension GASTRONORM 1/1 (530x325)

RACK DIMENSION 500X500 mm

RACK EQUIPMENT 2XC40 - 1XC44 - 2X15060

WASHING CYCLES (sec) 1 (50) 2 (90) 3 (120) 4 (180) 5 (180**) 6 (630**)

WATER SUPPLY 10°C

racks/h(*) (1)	55	40	30	20	20	5
----------------	----	----	----	----	----	---

WATER CONSUMPTION / CYCLE 2,6 L

BOILER CAPACITY 15 L

BOILER HEATING ELEMENT 9000 W

RINSING TEMPERATURE (SET) 85°C 90°C

TANK CAPACITY 42 L

TANK HEATING ELEMENT 2700 W

TANK TEMPERATURE (SET) 55°C

PUMPS POWER washing/rinsing 1490 (800 L/min***)/250 W

DRAIN PUMP 25 W (40 L/min***)

NOISE 66.4±0.7 dB(A)

EXIT AIR TEMPERATURE:
25°C

HUMIDITY
60%

AIR FLOW RATE:
105 m³/h

HEAT RECOVERY PER HOUR:
6 kWh
(VALUES CALCULATED ON THE BASIS OF THE SHORTEST CYCLE)

(*)STANDARD TERMOSTOP

(**)WITH 70°C IN TANK

(***)MAXIMUM FLOW RATE

(*) In caso di alimentazione con acqua fredda e/o in caso di più lavaggi consecutivi si potrebbero allungare i tempi di riscaldamento dell'acqua del risciacquo finale fino al raggiungimento della temperatura ottimale. Conseguentemente, il tempo totale del ciclo di lavaggio potrebbe aumentare.