


TEMPERATURA ARIA
IN USCITA:
25°C

UMIDITÀ:
60%


PORTATA D'ARIA:
105 m³/h

RECUPERO ORARIO:
6 kWh
(DATI CALCOLATI SUL
CICLO PIÙ CORTO)

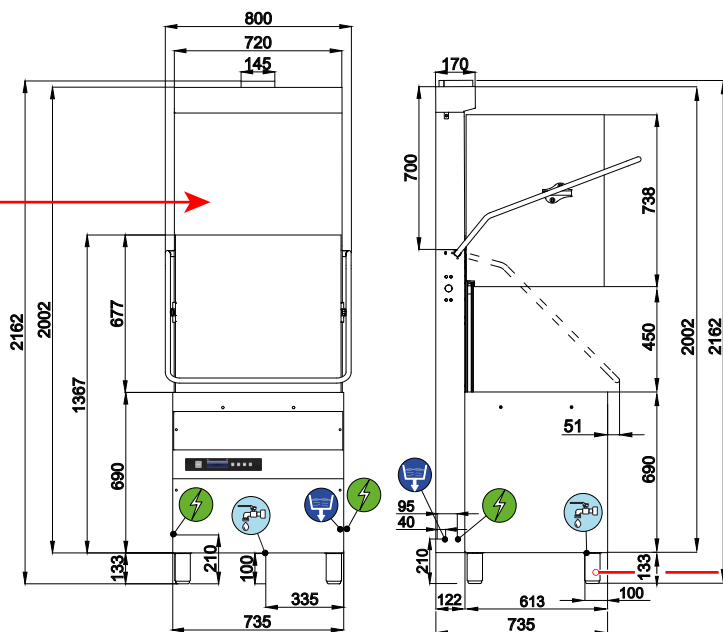

	WATER CONNECTION 3/4" GAS / 10°C NO OSMOTIC WATER
	DRAINING PIPE Ø 28mm
	ELECTRICAL SUPPLY

PIEDINO "MARINA"
"MARINA" FOOT

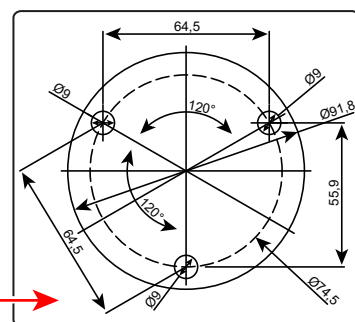

TECHNICAL DATA						
EXTERNAL DIMENSIONS						
width	800 mm					
depth	735 mm					
height	2162 mm					
WEIGHT(basic version)	150 Kg					
VOLTAGE	400 V 3N 50 Hz					
POWER REQUIRED	10490 W					
WATER HARDNESS	< 8 °f					
WATER CONDUCTIVITY	> 200 μS\cm					
INLET WATER PRESSURE	200-400 kPa					
CROCKERY DIMENSIONS						
plates diameter	310 mm (22 pz DWC136); 310 mm<Ø<410 mm depth 25 mm (11 pz DWC138)					
trays max. dimension	GASTRONORM 1/1 (530×325)					
RACK DIMENSION	600 × 500 mm					
RACK EQUIPMENT	DWC136 - DWC137 - DWC138 - 2 × 15060					
WASHING CYCLES (s)	1 (50)	2 (90)	3 (120)	4 (180)	5 (180**)	6 (630**)
WATER SUPPLY 10°C						
racks/h(*) ⁽¹⁾	55	40	30	20	20	5
WATER CONSUMPTION / CYCLE	2,6 l					
BOILER CAPACITY	15 l					
BOILER HEATING ELEMENT	9000 W					
RINSING TEMPERATURE (SET)	85°C				90°C	
TANK CAPACITY	42 l					
TANK HEATING ELEMENT	2700 W					
TANK TEMPERATURE (SET)	55 °C					
PUMPS POWER washing / rinsing	1490 (800 l /min***)/250 W					
DRAIN PUMP (optional)	25 W (40 l /min***)					
NOISE	66,4±0,7 dB(A)					

(*) STANDARD THERMOSTOP () WITH 70°C IN TANK (***)MAXIMUM FLOW RATE**

(¹) In caso di alimentazione con acqua fredda e/o in caso di più lavaggi consecutivi si potrebbero allungare i tempi di riscaldamento dell'acqua del risciacquo finale fino al raggiungimento della temperatura ottimale. Conseguentemente, il tempo totale del ciclo di lavaggio potrebbe aumentare.

N.B. A TERMINE DI LEGGE CI RISERVIAMO LA PROPRIETÀ DI QUESTO DISEGNO CON DIVIETO DI RIPRODURLO O DI RENDERLO NOTO A TERZI O A DITTE CONCORRENTI SENZA NOSTRO CONSENSO SCRITTO