

MULTIFUNCTION HOOD-TYPE DISHWASHER

Range: HOOD 130 MAXXI

We introduce the new versatile hood-type dishwasher, an innovative product designed to simplify the washing of objects of different sizes in an easy-to-use and efficient way. Equipped with a large basket of 600x500 mm, these machines can accommodate plates, glasses, pans and other objects of different sizes, ensuring impeccable results. Thanks to customizable washing programs, 2 HYGIENE+ cycles and an advanced technology, this model guarantees perfect results in a short time, saving energy and water. A robust and resistant structure allows to last over time and offers high performance even after numerous uses. Whether you need to wash dishes in a restaurant, a bar or a canteen, the pass-through multifunction dishwasher is the ideal choice to ensure a more efficient management of your time.





FEATURES


- Rack 600x500 mm
- Useful height 450 mm
- 6 wash cycles: 4 customizable cycles + 2 HYGIENE+ cycles
- Easy and intuitive electronic control panel
- Double skin insulated hood
- Deep tank
- Double tank filters with dirt collection system and pump filter (improved system for a better filtration of the wash water)
- Self-cleaning vertical wash pump for greater operating hygiene
- Water consumption and working time control system
- Easy to access for maintenance
- Non-drip roof panel
- Easily removable basket support
- Linear or corner layouts
- Self-cleaning cycle
- Peristaltic detergent and rinse aid dispensers included with dosage adjustable from the control panel
- The PLUS System ensures optimal and constant rinsing performance thanks to the combination of Break Tank, atmospheric boiler and rinse pump
- HR Heat recovery steam condensing unit for cold water supply
- LIFT: automatic hood lift at the end of cycle

OPTIONS

- Special voltages
- Additional boiler power for cold water supply
- Drain pump
- Built-in peristaltic detergent dispenser
- Connectivity (Cloud)
- Probes for lack of detergent and rinse aid detection
- Built-in water softener with automatic regeneration
- Predisposition for connection to an external reverse osmosis system
- Remote control panel instead of the standard control panel

Option compatibility to be confirmed by the manufacturer after verification

<p>CAPACITY</p>  <p>Ø 410 600x500</p>	<p>RACK EQUIPMENT</p> <ul style="list-style-type: none"> • 1 X C136 • 1 X C137 • 1 X C138 • 2 X 15060 
--	--

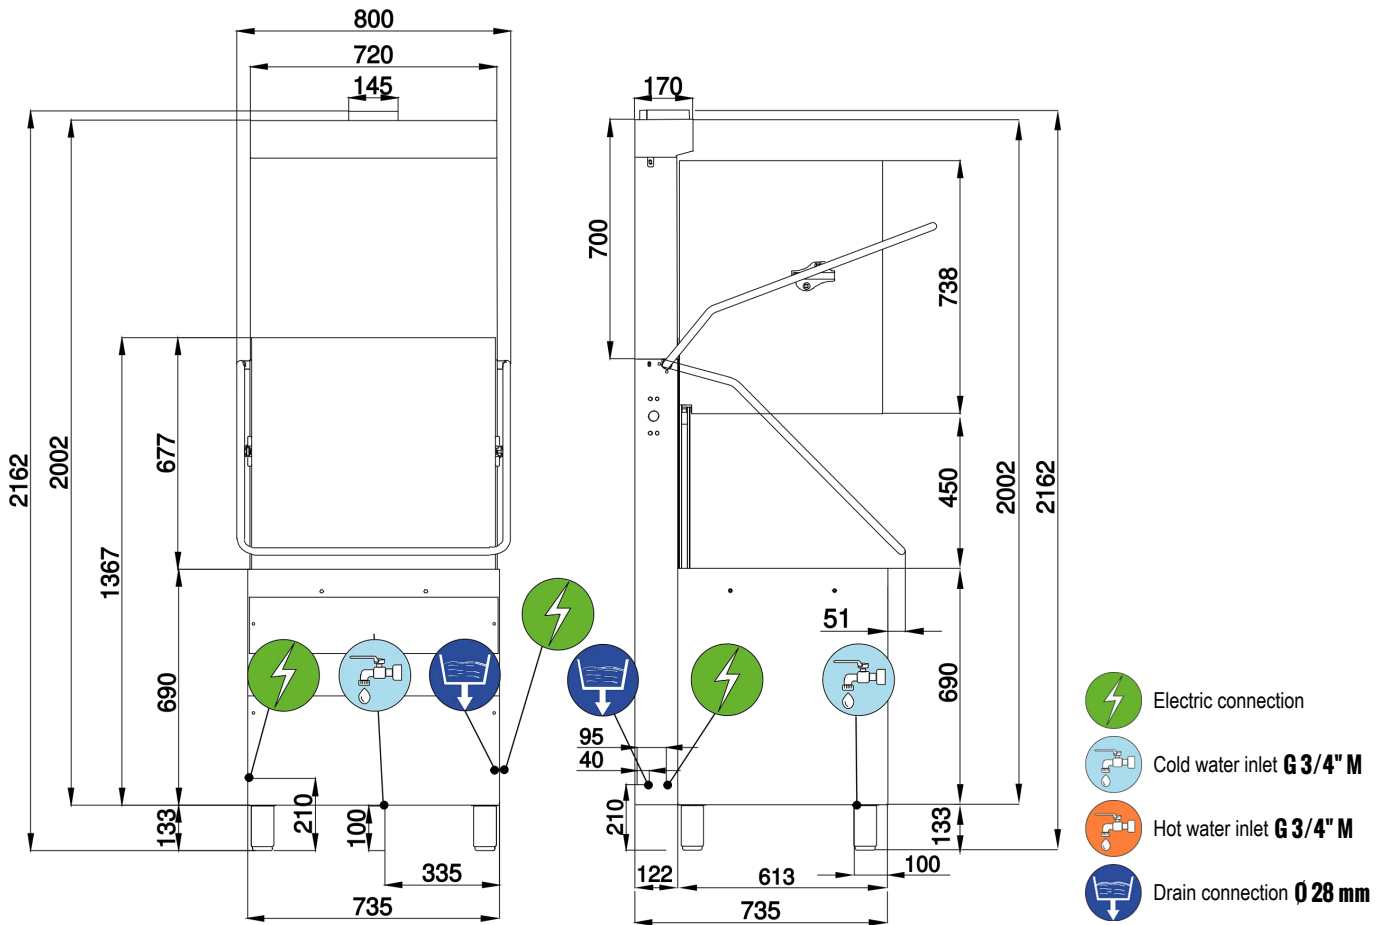

TECHNICAL FEATURES

EXTERNAL DIMENSIONS

Width	mm	800
Depth	mm	735
Height (screwed foot)	mm	2162
Weight (standard version)	kg	150

TECHNICAL DATA

Basket dimensions	mm	600x500
Maximum dish diameter	mm	410
Maximum level of water discharge	mm	170
Water inlet temperature	°C	10
Maximum inlet water hardness	°f	8
Minimum inlet water conductivity	µS / cm	200
Inlet water pressure	kPa	200 - 400
Tank capacity	l	42
Tank heating element	kW	2.7
Boiler capacity	l	15
Boiler heating element	kW	9
Wash pump power	kW	1.49
Wash pump flow rate	l/min	800
Rinse pump power	kW	0.25
Sound pressure level	dB(A)	72.5

MULTIFUNCTION HOOD-TYPE DISHWASHER

LOADING CAPACITY

GN 1/1 loading capacity		10 x (530x325x25)
-------------------------	--	-------------------

POWER SUPPLY DATA

Supply voltage		380-415 V 3N 50 Hz
Total installed power	kW	10.49

CYCLES

Cycle number		1	2	3	4	5	6
Cycle length	s	50	90	120	180	180	630
Cycle productivity (racks/h) - 10°C inlet water		55	40	30	20	20	5
Cycle water consumption	l	2.6	2.6	2.6	2.6	2.6	2.6
Rinsing temperature setting	°C	85	85	85	85	90	90
Washing temperature setting	°C	55	55	55	55	55	55

HEAT RECOVERY TECHNICAL DATA

Outlet air temperature	°C	25
Outlet air humidity	%	60
Air flow rate	m³/h	105
Heat recovery per hour	kWh	6 (data calculated on shortest cycle)

Standard Thermostop. In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.