

### Range: HOOD 130 MAXXI

We introduce the new versatile hood-type dishwasher, an innovative product designed to simplify the washing of objects of different sizes in an easy-to-use and efficient way. Equipped with a large basket of 600x500 mm, these machines can accommodate plates, glasses, pans and other objects of different sizes, ensuring impeccable results. Thanks to customizable washing programs, 2 HYGIENE+ cycles and an advanced technology, this model guarantees perfect results in a short time, saving energy and water. A robust and resistant structure allows to last over time and offers high performance even after numerous uses. Whether you need to wash dishes in a restaurant, a bar or a canteen, the pass-through multifunction dishwasher is the ideal choice to ensure a more efficient management of your time.



### FEATURES

- Rack 600x500 mm
- Useful height 450 mm
- 6 wash cycles: 4 customizable cycles + 2 HYGIENE+ cycles
- Easy and intuitive electronic control panel
- Double skin insulated hood
- Deep tank
- Double tank filters with dirt collection system and pump filter (improved system for a better filtration of the wash water)
- Self-cleaning vertical wash pump for greater operating hygiene
- Water consumption and working time control system
- Easy to access for maintenance
- Non-drip roof panel
- Easily removable basket support
- Linear or corner layouts
- Self-cleaning cycle
- Peristaltic detergent and rinse aid dispensers included with dosage adjustable from the control panel
- The PLUS System ensures optimal and constant rinsing performance thanks to the combination of Break Tank, atmospheric boiler and rinse pump

### OPTIONS

- Special voltages
- Drain pump
- Built-in peristaltic detergent dispenser
- Peristaltic rinse aid dispenser
- Built-in water softener with automatic regeneration
- Predisposition for connection to an external reverse osmosis system
- Additional boiler power for cold water supply
- WRAS Break Tank
- DVGW Break Tank
- Connectivity (Cloud)
- Probes for lack of detergent and rinse aid detection
- Substitute remote control panel


Option compatibility to be confirmed by the manufacturer after verification

**CAPACITY**

Ø 310 600x500

**RACK EQUIPMENT**

- 1X C136
- 1 X C137
- 1 X C138
- 2 X 15060

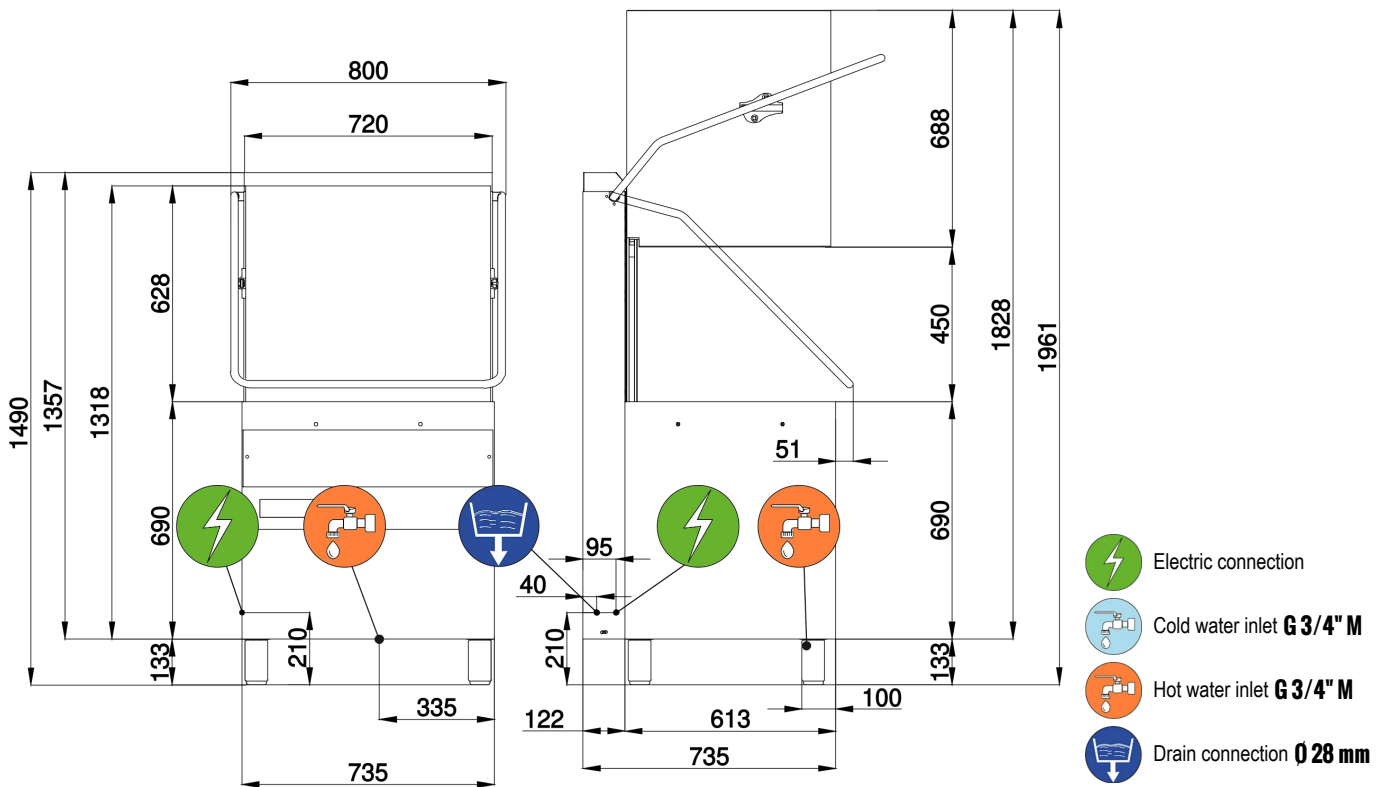

**TECHNICAL FEATURES**

**EXTERNAL DIMENSIONS**

Width	mm	800
Depth	mm	735
Height (screwed foot)	mm	1490 / 1961 (open hood)
Weight (standard version)	kg	120

**TECHNICAL DATA**

Basket dimensions	mm	600x500
Maximum dish diameter	mm	310
Maximum level of water discharge	mm	170
Water inlet temperature	°C	55
Maximum inlet water hardness	°f	8
Inlet water pressure	kPa	200 - 400
Tank capacity	l	42
Tank heating element	kW	2.7
Boiler capacity	l	15
Boiler heating element	kW	9
Wash pump power	kW	1.49
Wash pump flow rate	l/min	800
Rinse pump power	kW	0.25
Sound pressure level	dB(A)	72.5

**LOADING CAPACITY**

GN 1/1 loading capacity		10 x (530x325x25)
-------------------------	--	-------------------

**POWER SUPPLY DATA**

Supply voltage		380-415 V 3N 50 Hz
Total installed power	kW	10.49

CYCLES							
Cycle number		1	2	3	4	5	6
Cycle length	s	50	90	120	180	180	630
Cycle productivity (racks/h) - 55°C inlet water		72	40	30	20	20	5
Cycle productivity (racks/h) - 10°C inlet water		35	35	30	20	20	5
Cycle water consumption	l	2.6	2.6	2.6	2.6	2.6	2.6
Rinsing temperature setting	°C	85	85	85	85	90	90
Washing temperature setting	°C	55	55	55	55	55	55

Standard Thermostop. In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.