





(***) MIN 130-MAX 200 mm

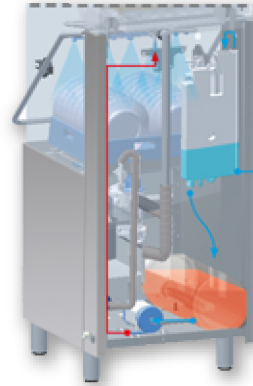

	WATER CONNECTION 3/4" GAS
	DRAIN PIPE Ø24mm
	ELECTRICAL SUPPLY

TECHNICAL DATA						
EXTERNAL DIMENSIONS						
width	720 mm					
depth	735 mm					
height	1445/1880 (open hood)					
WEIGHT(basic version)	125 kg					
VOLTAGE	400V 3N 50Hz					
POWER REQUIRED	9900 W					
WATER HARDNESS	2-8 °f					
INLET WATER PRESSURE	200-400 kPa					
CROCKERY DIMENSIONS						
plates diameter	410 mm					
trays max. dimension	GASTRONORM 1/1 (530x325)					
RACK DIMENSION	500X500 mm					
RACK EQUIPMENT	2XC40 - 1XC44 - 2X15060					
WASHING CYCLES (sec)	0(21÷680)**	1 (50)	2 (90)	3(120)	4(180)	5(300)
WATER SUPPLY 55°C						
racks/h(*) ⁽¹⁾	/	55	40	30	20	12
WATER SUPPLY 10°C						
racks/h(*) ⁽¹⁾	/	25	25	25	20	12
WATER CONSUMPTION / CYCLE	3,5 l					
BOILER CAPACITY	15 l					
BOILER HEATING ELEMENT	9000 W					
RINSING TEMPERATURE (SET)	70÷90°C(**)					82°C
TANK CAPACITY	20 l					
TANK HEATING ELEMENT	2700 W					
TANK TEMPERATURE (SET)	50÷70°C(**)					60°C
PUMPS POWER washing / rinsing	900W (500 l/min***)/250 W					
DRAIN PUMP	25 W (40 l/min***)					
NOISE	63.6±0.7 dB(A)					

(*) STANDARD THERMOSTOP / (***) MAXIMUM FLOW RATE / (**) CUSTOM CYCLE

(1) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.