
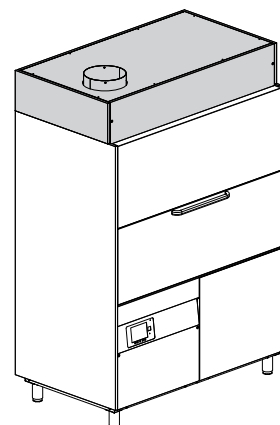


EXIT AIR
TEMPERATURE:
25°C / 77 °F

HUMIDITY:
75%

AIR FLOW RATE:
270 m³/h / 160 cfm

RECOVERY HOUR:
3 kWh
(VALUES CALCULATED
ON THE BASE OF THE
SHORTEST CYCLE)

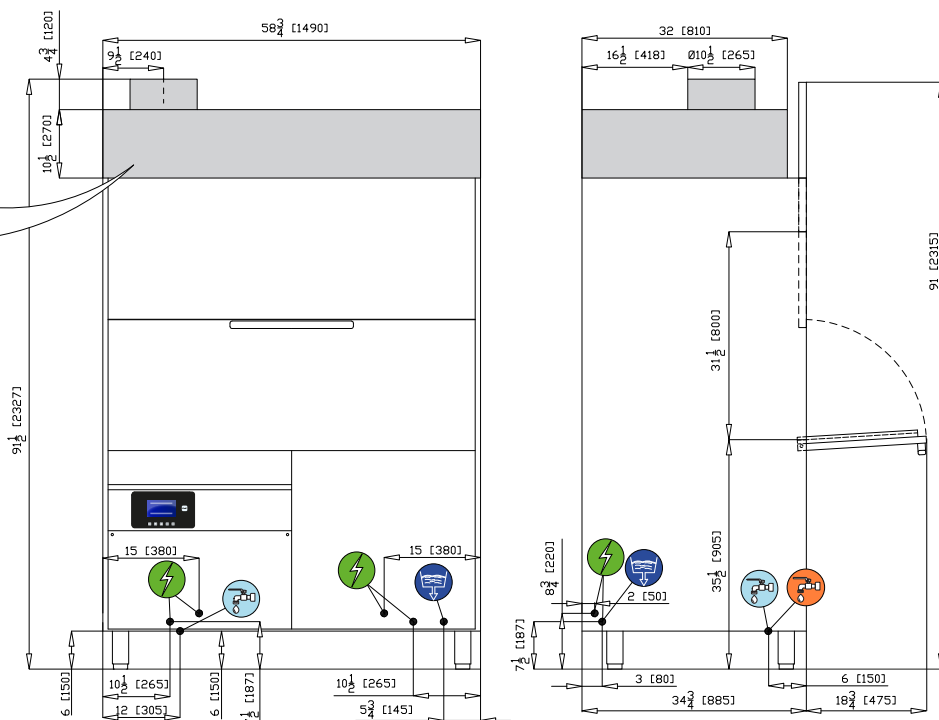

	WATER CONNECTION 3/4" GAS 131 °F (55 °C)
	WATER CONNECTION 3/4" GAS 50 °F (10 °C)
	DRAINING PIPE 1" 1/4 - 1" 5/8 (Ø 32 mm - Ø 40 mm)
	ELECTRICAL SUPPLY

TECHNICAL DATA					
EXTERNAL DIMENSIONS					
WIDTH		58 ¾ inch (1490 mm)			
DEPTH		34 ¾ inch (885 mm)			
HEIGHT		91 ½ inch (2327 mm)			
WEIGHT		798 lb (362 kg)			
VOLTAGE (V)		208 3 ph 60 Hz	220-240 3 ph 60 Hz	480 3 ph 60 Hz	
POWER REQUIRED		23350 W	24950 W	23350 W	
WATER HARDNESS		< 8 °f			
WATER CONDUCTIVITY		> 200 µS/cm			
INLET WATER PRESSURE		25 - 90 PSI (170 - 600 kPa)			
USEFUL HEIGHT AND RACKS					
USEFUL HEIGHT		31 ½ inch (800 mm)			
RACK DIMENSIONS		53 ¼ x 28 ½ inch (1350 x 725 mm)			
RACK EQUIPMENT		1XC86/A - 1XC97/A - 1X93600			
WASHING CYCLES (min)		1 (8,5)	2 (10,5)	3 (12,5)	4 (14,5)
WATER SUPPLY 50-60 °F					
RACKS/h (*) (1)		7	5	5	4
WATER CONSUMPTION / CYCLE		2,64 US gal lqd (10 l)			
BOILER CAPACITY		5,3 US gal lqd (20 l)			
BOILER HEATING ELEMENT		9000 W			
RINSING TEMPERATURE (SET)		185 °F (85 °C)			
TANK CAPACITY		38 US gal lqd (144 l)			
TANK HEATING ELEMENT		9000 W			
TANK TEMPERATURE (SET)		160 °F (71 °C)			
WASHING PUMP POWER		2600 W , 290 US gal lqd/min*** (1100 l/min***) x 2			
RINSING PUMP POWER		250 W , 39,5 US gal lqd/min*** (150 l/min***) x 2			
DRAIN PUMP (OPTIONAL)		30 W , 5,3 US gal lqd/min*** (20 l/min***)			
ACOUSTIC PRESSURE		(74 ± 2,5) dB(A)			

(*) STANDARD THERMOSTOP (CAN NOT BE DISABLED) (***) MAXIMUM FLOW RATE

(1) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.