

Range: POT

Introducing our wide range of professional warewashers, designed to meet the needs of every sector, from catering to industry. The POT line includes versatile solutions, designed to ensure impeccable hygiene and thorough cleaning of different types of objects, without compromising efficiency and ease of use.

Whether we talk of catering, pastry laboratories or industries, our goal is to provide tools that improve productivity and respond to daily challenges. The POT range can transform the way you work, facilitating cleaning operations and ensuring high hygiene standards.

Let yourself be inspired by the endless possibilities we offer for a professional, efficient and tailor-made washing experience for your needs.





FEATURES


- Rack 600x500 mm
- Useful height 450 mm
- PLUS electronic: 4 customizable cycles
- Easy and intuitive electronic control panel
- Double skin insulated hood
- Deep tank
- Double tank filters with dirt collection system and pump filter (improved system for a better filtration of the wash water)
- Self-cleaning vertical wash pump for greater operating hygiene
- Water consumption and working time control system
- Easy to access for maintenance
- Non-drip roof panel
- Easily removable basket support
- Linear or corner layouts
- Self-cleaning cycle
- Peristaltic rinse aid dispenser included with dosage adjustable from the control panel
- The PLUS System ensures optimal and constant rinsing performance thanks to the combination of Break Tank, atmospheric boiler and rinse pump

OPTIONS

- Special voltages
- Additional boiler power for cold water supply
- Drain pump
- Built-in peristaltic detergent dispenser
- WRAS Break Tank
- DVGW Break Tank
- Connectivity (Cloud)
- Built-in water softener with automatic regeneration
- Probes for lack of detergent and rinse aid detection
- Remote control panel instead of the standard control panel
- Predisposition for connection to an external reverse osmosis system

Option compatibility to be confirmed by the manufacturer after verification

<p>CAPACITY</p>  <p>600x500</p>	<p>RACK EQUIPMENT</p> <ul style="list-style-type: none"> • 1 X C136 • 1 X C137 • 1 X C139 • 1 X C86/A 
--	--

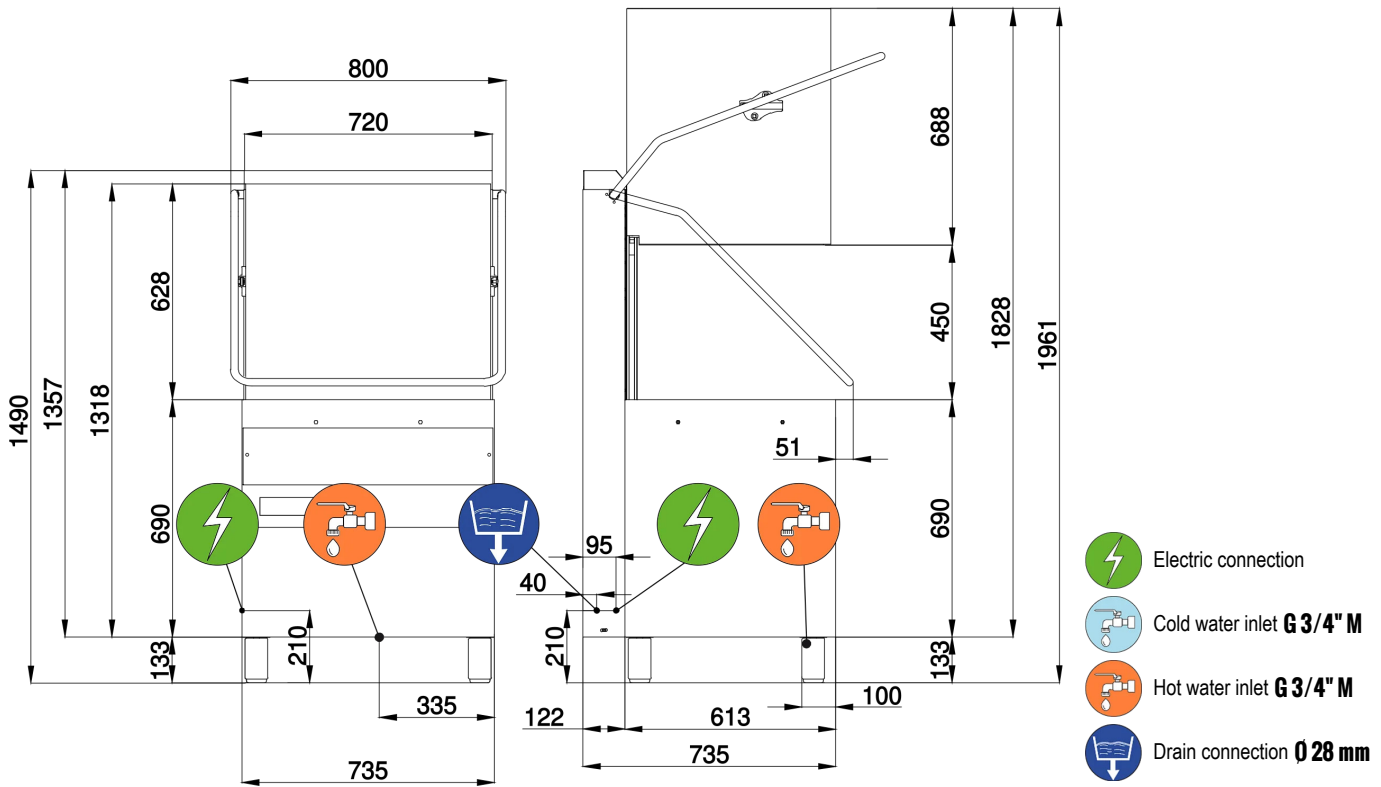

TECHNICAL FEATURES

EXTERNAL DIMENSIONS

Width	mm	800
Depth	mm	735
Height (screwed foot)	mm	1490 / 1961 (open hood)
Weight (standard version)	kg	120

TECHNICAL DATA

Basket dimensions	mm	600x500
Trays support dimensions	mm	500x600
Maximum level of water discharge	mm	170
Water inlet temperature	°C	55
Maximum inlet water hardness	°f	8
Inlet water pressure	kPa	200 - 400
Tank capacity	l	42
Tank heating element	kW	2.7
Boiler capacity	l	15
Boiler heating element	kW	9
Wash pump power	kW	1.49
Wash pump flow rate	l/min	800
Rinse pump power	kW	0.25
Sound pressure level	dB(A)	72.5

LOADING CAPACITY

GN 1/1 loading capacity		10 x (530x325x25)
-------------------------	--	-------------------

POWER SUPPLY DATA

Supply voltage		380-415 V 3N 50 Hz
Total installed power	kW	10.49

CYCLES					
Cycle number		1	2	3	4
Cycle length	s	50	90	120	180
Cycle productivity (racks/h) - 55°C inlet water		72	40	30	20
Cycle productivity (racks/h) - 10°C inlet water		35	35	30	20
Cycle water consumption	l	2.6	2.6	2.6	2.6
Rinsing temperature setting	°C	85	85	85	85
Washing temperature setting	°C	55	55	55	55

Standard Thermostop. In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.