



CATALOGUE
2023

KROMO
YOUR SMART WASH

UNDER-COUNTER DISHWASHERS

AQUA	Glass & dishwashers with double-wall door	2
DUPLA	Double skin glass & dishwashers	10
LUX	High-tech double skin glass & dishwashers	18
PREMIUM	Connected glass and dishwashers with clean water technology	28

HOOD-TYPE DISHWASHERS

HOOD 800 - 110	Single skin hood-type dishwashers	38
HOOD 110 I	Insulated hood-type dishwashers	46
HOOD 130 LUX	Latest generation hood-type dishwashers	54
HOOD 140 PREMIUM	Connected hood-type dishwashers with clean water technology	64

STOCK & WASH DISHWASHERS

WASH & STORE	Stock & Wash Dishwashers	74
--------------	--------------------------	----

RACK CONVEYOR DISHWASHERS

RK COMPACT	Compact rack conveyor dishwashers with simple rinse	82
RK UP	Rack conveyor dishwashers with single or double rinse	90
RK LUX	Rack conveyor dishwashers with reinforced double rinse	106
RK PREMIUM	Rack conveyor dishwashers with 3R+ reinforced triple rinse	118

FLIGHT CONVEYOR MACHINES

QK LUX	Flight conveyor machines with reinforced double rinse	130
QK PREMIUM	Flight conveyor machines with 3R+ reinforced triple rinse	146

TUNNEL TRAY WASHER & TRANSPORTATION SYSTEMS

TK	Tunnel traywasher with dryer	162
TL	Transportation systems	165

WAREWASHERS

POT	Warewashers	168
-----	-------------	-----

GRANULES WAREWASHER

GRANULE	Granules warewashers	180
---------	----------------------	-----

PULL-THROUGH CRATE WASHERS

VK - VK LUX	Pull-through crate washers	186
-------------	----------------------------	-----

CONVEYOR CRATE WASHERS

LK - LK-HD	Conveyor crate washers	196
------------	------------------------	-----

BASKETS	Standard supplied baskets	208
---------	---------------------------	-----

SALES CONDITIONS	General sales conditions	209
------------------	--------------------------	-----



The glass and dishwashers of the AQUA series are ideal for bars, pubs, restaurants and hotels. These undercounter machines, with a redesigned control panel, feature a wide loading capacity granting the highest performance at a reasonable price.

According to the user's needs the machine can be customized thanks to many optional features such as water softener, detergent dispenser and drain pump.











ELECTRONIC VERSION

An electronic control panel is available for AQUA T models. The LED panel displays the temperatures of both tank and boiler, the wash cycle and status and main alarm codes for malfunctions. You can now choose among four different washing programs to perfectly tailor the performances of the machine to the crockery that needs to be cleaned. The soft start function grants extra protection for fragile objects.

FEATURES

- AISI 304 structure
- Sound and heat proof double-skin door
- Door with anti-shock system
- Deep-drawn and inclined tank for a perfect total drain
- Overflow and drain pipes integrated system, for a triple protection of the wash pump
- Non-drip roof to safeguard the hygiene of the freshly washed dishes
- Light wash and rinse arms, granting the best efficiency also when the water pressure is weaker
- Easy to remove nozzles, to help with daily cleaning operations
- Back flow prevention valve
- Standard rinse-aid dispenser (peristaltic version on demand)
- Thermostop system: the rinse starts only when the water in boiler reaches 85 °C
- CE certified components
- Electronic version with four preset washing programs
- Automatic regeneration for Touch models with inbuilt water softener
- Glasswashers available also with round basket (AQUA 35 / AQUA 37 / AQUA 40)
- Innovative system of coupled wash and rinse arms in polypropylene and fiber of glass (AQUA 50 MONO / AQUA 50 T / AQUA 80 T)
- Self-cleaning cycle on the TOUCH versions
- Soft Start wash pump on the TOUCH versions
- Additional upper surface filter (on demand only for AQUA 50 MONO / AQUA 50 / AQUA 50 T / AQUA 80 T)

Model		Voltage	Capacity	Poids	Code
AQUA 35					
	RACK EQUIPMENT 2 X 10730 1 X 10728 1 X 15060	230 V ~ 50 Hz 2,6 kW	 195 H  350x350	400x495x585 H 28 kg	AQUA 35 AQUA 35 D
AQUA 37					
	RACK EQUIPMENT 2 X C10 1 X 10728 1 X 15060	230 V ~ 50 Hz 2,6 kW 2,8 kW (LS)	 275 H  Ø 280 LS  370x370	420x490x650 H 30 kg	AQUA 37 AQUA 37 D AQUA 37 LS AQUA 37 LS D
AQUA 40					
	RACK EQUIPMENT 2 X C121 1 X 10728 1 X 15060	230 V ~ 50 Hz 3,2 kW	 305 H  Ø 295 LS  400x400	450x535x700 H 37 kg	AQUA 40 AQUA 40 D AQUA 40 LS AQUA 40 LS D
AQUA 50 MONO 15 AMP MONOPHASE					
	RACK EQUIPMENT 1 X C40 1 X C44 1 X 15060	230 V ~ 50 Hz 3,5 kW	 320 H  Ø 345  500x500	590x600x850 H 57 kg	AQUA 50 MONO Surface filters
AQUA 50 2 PROGRAMS					
	RACK EQUIPMENT 1 X C40 1 X C44 1 X 15060	400 V 3N ~ 50 Hz 5,2 kW	 320 H  Ø 345  500x500	590x600x850 H 57 kg	AQUA 50 AQUA 50 D Surface filters

Model		Voltage	Capacity	Poids	Code
AQUA 40 T ELECTRONIC 4 PROGRAMS					
	RACK EQUIPMENT 2 X C121 1 X 10728 1 X 15060	230 V ~ 50 Hz 3,2 kW	 305 H  Ø 295 LS  400x400	450x535x700 H 37 kg	AQUA 40 T AQUA 40 T DA AQUA 40 T LS AQUA 40 T LS DA
AQUA 50 T ELECTRONIC 4 PROGRAMS					
	RACK EQUIPMENT 1 X C40 1 X C44 1 X 15060	400 V 3N ~ 50 Hz 5,2 kW	 320 H  Ø 345  500x500	590x600x850 H 57 kg	AQUA 50 T AQUA 50 T DA Surface filters
AQUA 80 T ELECTRONIC 4 PROGRAMS					
	RACK EQUIPMENT 1 X C40 1 X C44 1 X 15060	400 V 3N ~ 50 Hz 6,9 kW	 355 H  Ø 380  500x500	590x600x1290 H 69 kg	AQUA 80 T AQUA 80 T DA Surface filters

OPTIONS

						XP	PS	DDE	ST	DB										
Model	220-240 V 50 Hz	380-415 V 3N 50 Hz	220-240 V 3 50 Hz	60 Hz	Electronic timer	Extra Power	Drain Pump	Detergent Dispenser	Soft Start	Rinse-Aid Dispenser	Model	Peristaltic Rinse-Aid Disp.	Cold Rinse	DP+ Cold Rinse	Round Basket	PS+DDE+ +FS	TS	BT	WRAS	PAP
AQUA 35	●	----	----	€	●	----	€	€	----	●	AQUA 35	€	€	€	€	€	●	----	----	----
AQUA 35 D	●	----	----	€	●	----	€	€	----	●	AQUA 35 D	€	----	----	€	----	●	----	----	----
AQUA 37	●	----	----	€	●	----	€	€	----	●	AQUA 37	€	€	€	€	€	●	----	----	----
AQUA 37 D	●	----	----	€	●	----	€	€	----	●	AQUA 37 D	€	----	----	€	----	●	----	----	----
AQUA 37 LS	●	----	----	€	●	----	€	€	----	●	AQUA 37 LS	€	€	€	€	€	●	----	----	----
AQUA 37 LS D	●	----	----	€	●	----	€	€	----	●	AQUA 37 LS D	€	----	----	€	----	●	----	----	----
AQUA 40	●	□	□	€	●	€	€	€	----	●	AQUA 40	€	€	€	€	€	●	----	----	----
AQUA 40 D	●	□	□	€	●	€	€	€	----	●	AQUA 40 D	€	----	----	€	----	●	----	----	----
AQUA 40 LS	●	□	□	€	●	€	€	€	----	●	AQUA 40 LS	€	€	€	€	€	●	----	----	----
AQUA 40 LS D	●	□	□	€	●	€	€	€	----	●	AQUA 40 LS D	€	----	----	€	----	●	----	----	----
AQUA 50 MONO	●	----	----	€	●	----	€	€	----	●	AQUA 50 MONO	€	----	----	----	----	●	----	----	----
AQUA 50*	□	●	□	€	●	€	€	€	----	●	AQUA 50*	€	€	€	----	€	●	€	€	€
AQUA 50 D	□	●	□	€	●	€	€	€	----	●	AQUA 50 D	€	€	----	----	----	●	----	----	----
AQUA 40 T	●	----	----	€	●	----	€	€	●	●	AQUA 40 T	€	€	€	€	€	●	----	----	----
AQUA 40 T DA	●	----	----	€	●	----	€	€	●	●	AQUA 40 T DA	€	€	€	€	----	●	----	----	----
AQUA 40 T LS	●	----	----	€	●	----	€	€	●	●	AQUA 40 T LS	€	€	€	€	€	●	----	----	----
AQUA 40 T LS DA	●	----	----	€	●	----	€	€	●	●	AQUA 40 T LS DA	€	€	€	€	----	●	----	----	----
AQUA 50 T	□	●	□	€	●	€	€	€	●	●	AQUA 50 T	€	€	€	----	€	●	€	€	€
AQUA 50 T DA	□	●	□	€	●	€	€	€	●	●	AQUA 50 T DA	€	€	€	----	€	●	----	----	----
AQUA 80 T	€	●	□	€	●	----	€	€	●	●	AQUA 80 T	€	€	€	----	€	●	€	€	€
AQUA 80 T DA	€	●	□	€	●	----	€	€	●	●	AQUA 80 T DA	€	€	----	----	----	●	----	----	€

- D

Built-in water softener
- DA

Built-in automatic water softener
- LS

Upper wash
- T

Soft touch panel
- Standard
- Not available
- Upon request
- *

Construction according to UL-NSF standards upon request
- XP

Recommended with water 8-55 °C. For AQUA 40 with three-phase voltage only, AQUA 50 with standard voltage only
For other voltages please contact us

- SOFT START









Progressive start of the wash pump
- BT - WRAS






Booster pump included
- 220-240 V 50 HZ

For AQUA 50 and AQUA 80 max boiler heating element 4500 W
- 380-415 V 3N 50 HZ

For AQUA 40 with extra power only
- 220-240 V 3 50 HZ

For AQUA 40 LS D with special voltage and PS, DDE is not available
- Option compatibility to be confirmed by the manufacturer after verification
- Water supply 55 °C
- EAC label upon request

	Description	Capacity	Dimensions	Code	
	GLASS BASKET		350x350x110 H 400x400x135 H 370x370x130 H	10730 C 121 C 10	
	SLOPED GLASS BASKET	Ø 85 max Ø 10 max	370x370x210 H 500x500x200 H	C 39 C 26	
	GLASS BASKET WITH GLASS SUPPORT AND ANTI-TIPPING LID		500x500x235 H	C 135	
	SLOPED GLASS BASKET	Ø 90 max Ø 120 max	400x400x185 H 400x400x160 H	C 123 C 79	
	LARGE MESH BASKET	For glasses	500x500x105 H	C 44	
	ROUND GLASS BASKET ROUND BASKET SUPPORT	Basket Support Basket Support Basket Support	Ø 350x105 H 350x350 Ø 370x120 H 370x370 Ø 400x145 H 400x400	C 21 C 36 C 07 C 37 C 16 C 38	
	HOLDER FOR GLASS SUPPORT	For glass support (C112-C113-C114)	500x500x50 H	C111	
	GLASS SUPPORT	5x5 Glass Ø 87 mm (C111)	500x500x50 H	C 112	
	GLASS SUPPORT	4x4 Glass Ø 110 mm (C111)	500x500x50 H	C 113	
	GLASS SUPPORT	6x6 Glass Ø 72 mm (C111)	500x500x50 H	C 114	

	Description	Capacity	Dimensions	Code	
	PLATE BASKET	18 Plates	500x500x105 H	C 40	
	PLATE BASKET	10 Plates 12 Plates	370x370x100 H 400x400x120 H	C 03 C 31	
	SAUCER HOLDER	14 Saucers	300x100x90 H	10728	
	CUTLERY BASKET		Ø 120x120 H	15060	
	STAND	Stainless steel stand	592x535x500 H	999900517	
	SINK UNIT FOR UNDER-COUNTER MODELS	Sink 500x400x300H	1200x700x850 H	A 20	
	WATER SOFTENER	12 l	Ø 200x500 H	D 1	
	AUTOMATIC WATER SOFTENER	12 l (max 800 l)	315x510x685 H	D 2	

* Woden cage +2% minimum €
Special dimensions for tables upon request
Tables shown in right-to-left version



Double wall glass and dishwashers DUPLA line. Designed to meet the needs of bars, restaurants, hotels and pubs. Their aesthetics has been renewed; electro-mechanic and electronic version are available.

A wide choice of options may be chosen amongst, water softener, detergent dispenser, drain pump and the surface filters in order to adapt the machine to the most diverse uses.









ELECTRONIC VERSION

An electronic control panel is available for DUPLA T models. The LED panel displays the temperatures of both tank and boiler, the wash cycle and status and main alarm codes for malfunctions. You can now choose among four different washing programs to perfectly tailor the performances of the machine to the crockery that needs to be cleaned. The soft start function grants extra protection for fragile objects.

FEATURES

- Double walled AISI 304 structure
- Pressed basket supports
- Double skin door with anti-shock system
- Deep-drawn and sloped tank for a perfect total drain
- Overflow and drain pipes integrated system, for a triple protection of the washing pump
- Non-drip roof to safeguard the hygiene of the freshly washed dishes
- Light wash and rinse arms, granting the best efficiency also in the event of weak pressure in the water mains (DUPLA 35, DUPLA 37, DUPLA 40)
- S/S wash arms (DUPLA 50 and DUPLA 50 T)
- Easy to remove nozzles, to help with daily cleaning operations
- Back flow prevention valve
- Rinse-aid dispenser (peristaltic version on demand)
- Thermostop system: the rinse starts only when the water in boiler reaches 85 °C
- CE Certified components
- Electronic version with four preset washing programs
- Automatic regeneration for touch models with built-in water softener
- Glasswashers available also with round basket
- Self-cleaning cycle on the TOUCH versions
- Soft Start wash pump on the TOUCH versions
- Additional upper surface filter (on demand only for DUPLA 50 and DUPLA 50 T)

Model		Voltage	Capacity	Poids	Code
DUPLA 35					
	RACK EQUIPMENT 2 X 10730 1 X 10728 1 X 15060 	230 V ~ 50 Hz 2,6 kW	 270 H	415x465x670 H 30 kg	DUPLA 35
			 350x350		DUPLA 35 D
DUPLA 37					
	RACK EQUIPMENT 2 X C10 1 X 10728 1 X 15060 	230 V ~ 50 Hz 2,6 kW 2,8 kW (LS)	 290 H	430x490x680 H 32 kg	DUPLA 37
			 Ø 285		DUPLA 37 D
			 370x370		DUPLA 37 LS
					DUPLA 37 LS D
DUPLA 40 LS UPPER WASH					
	RACK EQUIPMENT 2 X C121 1 X 10728 1 X 15060 	230 V ~ 50 Hz 3,2 kW	 305 H	460x545x715 H 38 kg	DUPLA 40 LS
			 Ø 295		DUPLA 40 LS D
			 400x400		
DUPLA 50 2 PROGRAMS					
	RACK EQUIPMENT 1 X C40 1 X C44 1 X 15060 	400 V 3N~ 50 Hz 5,2 kW	 310 H	595x610x845 H 61 kg	DUPLA 50 MONO
			 Ø 325		DUPLA 50 MONO D
			 500x500		DUPLA 50
					DUPLA 50 D
					Surface filters








Model	Voltage	Capacity	Poids	Code	
DUPLA 40 LS T ELECTRONIC 4 PROGRAMS					
	RACK EQUIPMENT 2 X C121 1 X 10728 1 X 15060 	230 V ~ 50 Hz 3,2 kW	 305 H  Ø 295  400x400	460x545x715 H 38 kg	DUPLA 40 LS T
					DUPLA 40 LS T DA
DUPLA 50 T ELECTRONIC 4 PROGRAMS					
	RACK EQUIPMENT 1 X C40 1 X C44 1 X 15060 	400 V 3N ~ 50 Hz 5,2 kW	 310 H  Ø 325  500x500	595x610x845 H 61 kg	DUPLA 50 T
					DUPLA 50 T DA
					Surface filters







OPTIONS

					XP	PS	DDE	DB	ST							DBE	CR	FS	PS+FS	PS+DDE +FS	TS	BT	WRAS	PAP
Model	220-240 V 50 Hz	380-415 V 3N 50 Hz	220-240 V 3 50 Hz	60 Hz	Electronic timer	Extra Power	Drain Pump	Detergent Dispenser	Rinse-Aid Dispenser	Soft Start		Model	Peristaltic Rinse-Aid Disp.	Round Basket	Cold Rinse	DP+ Cold R.	DP-DDE+ Cold R.	Thermostop System	Break Tank		Wras	Booster pump		
DUPLA 35	●	----	----	€	●	----	€	€	●	----		DUPLA 35	€	€	€	€	€	●	----		----	----		
DUPLA 35 D	●	----	----	€	●	----	€	€	●	----		DUPLA 35 D	€	€	----	----	----	●	----		----	----		
DUPLA 37	●	----	----	€	●	----	€	€	●	----		DUPLA 37	€	€	€	€	€	●	----		----	----		
DUPLA 37 D	●	----	----	€	●	----	€	€	●	----		DUPLA 37 D	€	€	----	----	----	●	----		----	----		
DUPLA 37 LS	●	----	----	€	●	----	€	€	●	----		DUPLA 37 LS	€	€	€	€	€	●	----		----	----		
DUPLA 37 LS D	●	----	----	€	●	----	€	€	●	----		DUPLA 37 LS D	€	€	----	----	----	●	----		----	----		
DUPLA 40	●	□	□	€	●	€	€	€	●	----		DUPLA 40	€	€	€	€	€	●	----		----	----		
DUPLA 40 D	●	□	□	€	●	€	€	€	●	----		DUPLA 40 D	€	€	----	----	----	●	----		----	----		
DUPLA 50 *	□	●	□	€	●	€	€	€	●	----		DUPLA 50 *	€	----	€	€	€	●	€	€	€	€		
DUPLA 50 D	□	●	□	€	●	€	€	€	●	----		DUPLA 50 D	€	----	----	----	----	●	----		----	€		
DUPLA 40 T	●	----	----	€	●	----	€	€	●	●		DUPLA 40 T	€	€	€	€	€	●	----		----	----		
DUPLA 40 T DA	●	----	----	€	●	----	€	€	●	●		DUPLA 40 T DA	€	€	€	€	€	●	----		----	----		
DUPLA 50 T	□	●	□	€	●	€	€	€	●	●		DUPLA 50 T	€	----	€	€	€	●	€	€	€	€		
DUPLA 50 T DA	□	●	□	€	●	€	€	€	●	●		DUPLA 50 T DA	€	----	€	€	€	●	----		----	----		

- D
- Built-in water softener
- DA
- Built-in automatic water softener
- LS
- Upper wash
- T
- Soft touch panel
-
- Standard
-
- Not available
-
- Upon request
- *
- Construction according to UL-NSF standards upon request
- XP
- Recommended with water 8-55 °C. For DUPLA 40 only with three-phase voltage, DUPLA 50 only with standard voltage.
For other voltages please contact us

- SOFT START
- Progressive start of the wash pump
- BT - WRAS
- Booster pump included
- 220-240 V 50 HZ
- For DUPLA 50 max boiler heating element 4500 W
- 380-415 V 3N 50 HZ
- For DUPLA 40 only with extra power
- 220-240 V 3 50 HZ
- For DUPLA 40 D with special voltage and PS, DDE is not available.
- Option compatibility to be confirmed by the manufacturer after verification
- Water supply 55 °C
- EAC label upon request

	Description	Capacity	Dimensions	Code	
	GLASS BASKET		350x350x110 H	10730	
			400x400x135 H	C 121	
			370x370x130 H	C 10	
	SLOPED GLASS BASKET	Ø 85 max	370x370x210 H	C 39	
		Ø 10 max	500x500x200 H	C 26	
	GLASS BASKET WITH GLASS SUPPORT AND ANTI-TIPPING LID			C 135	
	SLOPED GLASS BASKET	Ø 90 max	400x400x185 H	C 123	
		Ø 120 max	400x400x160 H	C 79	
	LARGE MESH BASKET	For glasses	500x500x105 H	C 44	
	ROUND GLASS BASKET	Basket	Ø 350x105 H	C 21	
		Support	350x350	C 36	
		Basket	Ø 370x120 H	C 07	
	ROUND BASKET SUPPORT	Support	370x370	C 37	
		Basket	Ø 400x145 H	C 16	
		Support	400x400	C 38	
	HOLDER FOR GLASS SUPPORT	For glass support (C112-C113-C114)	500x500x50 H	C111	
	GLASS SUPPORT	5x5 Glass Ø 87 mm (C111)	500x500x50 H	C 112	
	GLASS SUPPORT	4x4 Glass Ø 110 mm (C111)	500x500x50 H	C 113	
	GLASS SUPPORT	6x6 Glass Ø 72 mm (C111)	500x500x50 H	C 114	

	Description	Capacity	Dimensions	Code	
	PLATE BASKET	18 Plates	500x500x105 H	C 40	
	PLATE BASKET	10 Plates	370x370x100 H	C 03	
		12 Plates	400x400x120 H	C 31	
	SAUCER HOLDER	14 Saucers	300x100x90 H	10728	
	CUTLERY BASKET		Ø 120x120 H	15060	
	STAND	Stainless steel stand	592x535x500 H	999900517	
	SINK UNIT FOR UNDER-COUNTER MODELS	Sink 500x400x300H	1200x700x850 H	K 5/20	
	WATER SOFTENER	12 l	Ø 200x500 H	DEP 12	
	AUTOMATIC WATER SOFTENER	12 l (max 800 l)	315x510x685 H	DEP 12-AUT	

* Wooden cage +2% minimum + €
Special dimensions for tables upon request
Tables shown in right-to-left version



Last generation uncompromising KROMO dishwashers. These machines are built with fully double-skin body, completely deep-formed, designed for being silent and reliable. Beside the standard electronic versions with four programmable cycles, we have developed the PLUS models with guaranteed steady rinse temperature and pressure and two cycles with Hygiene+ superior features (LUX 60 EL).

Thanks to these latest technological features, the sturdy Plus versions will promote the almost total elimination of the bacterial load. The customization of our new generation machines has never been so easy!

$A_0=30$
HYGIENE+



HYGIENE+ SYSTEM

The Hygiene+ models perform long cycles at high temperatures to fulfill high levels of hygiene, now more essential than ever for our health. Designed and conceived upon rigorous disinfection parameters, the Hygiene+ models include 2 special cycles complying with $A_0=30$ on the scale of thermo-disinfection according to the norm EN ISO 15883-1, a short one program of 180 seconds and a longer one of 630 seconds, ensuring compliance with high levels of hygiene thanks to high temperatures and long cycles.

FEATURES

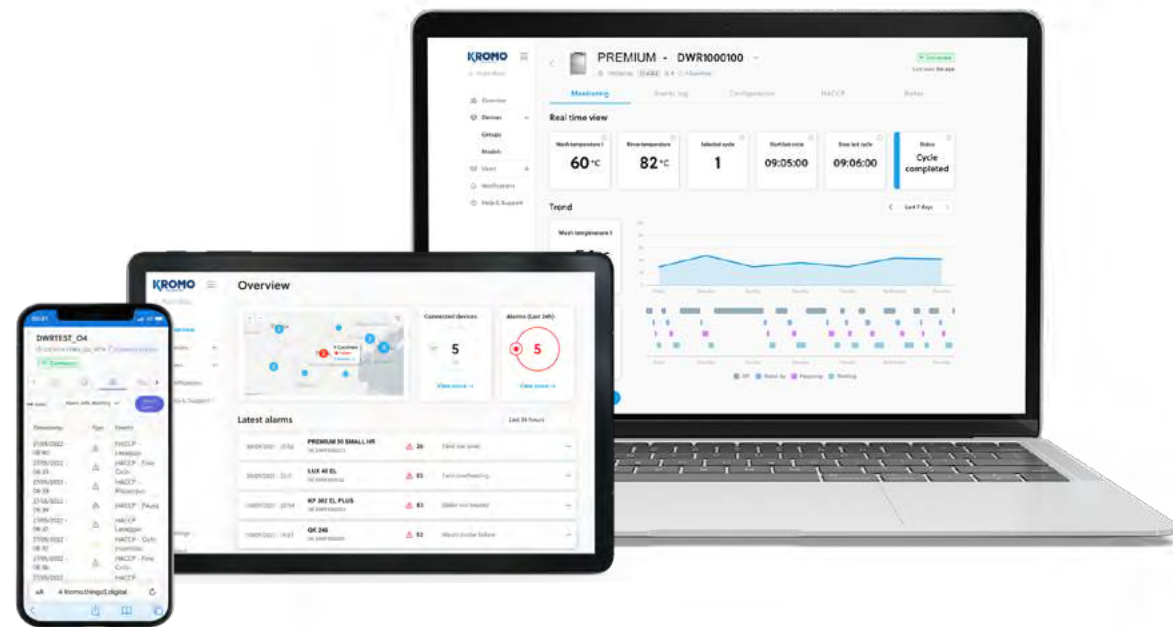
- Double skin AISI 304 machine and double skin insulated door
- Sloped deep-formed tank
- Wash arms in stainless steel with unblockable nozzles and lightweight rinse arms in composite material
- Deep-formed rack supports
- Anti-drop roof panel
- Suitable for Gastronorm 1/1 trays
- Multivoltage models
- Detergent and rinse-aid dosage setting, directly from the control panel (PLUS models)
- Wash and rinse temperatures displayed
- Anti back-flow valve available also DVGW or WRAS certified)
- Double tight-mesh filter system in stainless steel
- Programmable wash cycles (not on ELECTRON 1000 plus)
- HYGIENE+ Version: 2 special additional programs complying with $A_0=30$ according to the norm EN ISO 15883-1
- Intuitive START button with multicolour backlight for a quick visualization of the machine status
- Self-cleaning cycle
- Soft Start wash pump
- Thermal insulation of boiler
- Soft door opening and programmable START function when the door gets closed
- OPTIMAL-RINSE (optimal rinse technology): water consumption rate among the lowest on the market, consequent reduction of electricity and chemicals consumptions
- Built-in peristaltic detergent dispenser and built-in rinse-aid dispenser (peristaltic rinse-aid dispenser included in the PLUS versions)
- Water consumption and working time control system (PLUS versions)
- PLUS system for extra rinse guarantee (on PLUS models)
- Built-in automatic water softener available
- CONNECTIVITY remote control compliant with the HACCP norms (on request)
- Cold water rinse (on demand)
- Reverse osmosis connection for external device (PLUS version)

CONNECTIVITY 4.0

WHEREVER YOU ARE...

YOUR DISHWASHER, JUST A CLICK AWAY

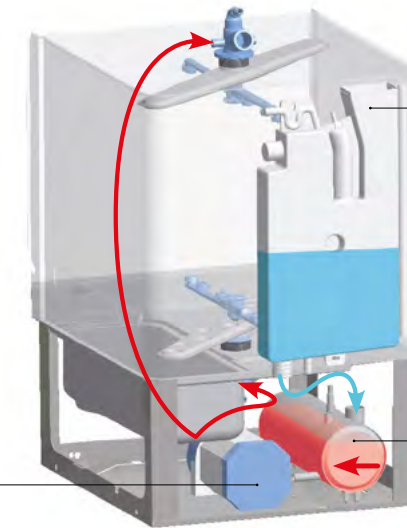
You will be constantly connected to the machine to monitor the work phases, review any eventual alarm and configure remotely the operating parameters according to your needs. Compliant with HACCP norms. Compliant with HACCP norms.

**PLUS SYSTEM**

GUARANTEED RINSE EVEN

WITH LOW PRESSURE OF THE WATER INLET

We have developed an innovative rinsing system at constant temperature, consumption and water pressure, regardless of external conditions.

**BREAK TANK**

The Break Tank system prevents the heated water of the boiler to go back and mix with the fresh water supply.

RINSE PUMP

The water is sucked from the boiler through a rinse pump and is sent to the rinse nozzles. The correct pressure is ensured regardless of the water inlet pressure and temperature.

ATMOSPHERIC BOILER

The water temperature in the boiler remains constant at 85°C throughout the rinse, as the boiler refill only occurs once the rinse cycle is done.



View all the working parameters and event records, working hours and any problem at any time.



In case of problem, the machine promptly alerts you. The technician can intervene remotely to solve the problem or anticipate the needed parts for an on-site intervention.



A daily activity report is available with all the events related to the dishwasher in a detailed spreadsheet with HACCP data.



Our Connectivity system is a revolutionary device limiting and facilitating the eventual intervention of a technician who can anticipate the necessary parts to be replaced, saving time and money.







STABILIZED PRESSURE
THROUGHOUT THE RINSE PHASE






STEADY WATER
TEMPERATURE IN THE
BOILER (85°C)



CLEANER WATER
LESS WASTE

Model	Voltage	Capacity	Poids	Code
LUX 40 EL	ELECTRONIC 4 PROGRAMS			
	Multivoltage		460x550x780 H 45 kg	LUX 40 EL
	standard	310 H		
	230 V 50 Hz 3,05 kW			
	230 V 3 50 Hz 4,45 kW	ø 310		LUX 40 EL DA
	400 V 3N 50 Hz 4,45 kW			
		400x400		
 RACK EQUIPMENT 2 X C121 1 X 10728 1 X 15060				
LUX 60 EL	ELECTRONIC 4 PROGRAMS			
	Multivoltage		600x610x850 H 63,5 kg	LUX 60 EL
	standard	325 H		
	400 V 3N 50 Hz 5,15 kW			
	230 V 3 50 Hz 5,15 kW	ø 340		LUX 60 EL DA
	230 V 50 Hz 5,15 kW			
		500x500		
 RACK EQUIPMENT 1 X C40 1 X C44 1 X 15060				
			530x325x25 H	
LUX 60 EL H+	ELECTRONIC 4 PROGRAMS			
	Multivoltage		600x610x850 H 63,5 kg	LUX 60 EL H+
	standard	325 H		
	400 V 3N 50 Hz 5,15 kW			
	230 V 3 50 Hz 5,15 kW	ø 340		LUX 60 EL DA H+
	230 V 50 Hz 5,15 kW			
		500x500		
 RACK EQUIPMENT 1 X C40 1 X C44 1 X 15060				
			530x325x25 H	
LUX 70 EL	ELECTRONIC 4 PROGRAMS			
	Multivoltage		600x680x850 H 68 kg	LUX 70 EL
	standard	400 H		
	400 V 3N 50 Hz 6,7 kW			
	230 V 3 50 Hz 6,7 kW	ø 400		LUX 70 EL DA
	230 V 50 Hz 6,7 kW			
		500x500		
 RACK EQUIPMENT 1 X C40 1 X C44 1 X 15060				
			530x325x25 H	
			Surface filters	

Model	Voltage	Capacity	Poids	Code
LUX 40 EL PLUS	ELECTRONIC 4 PROGRAMS			
	Multivoltage		460x550x780 H 46,5 kg	LUX 40 EL PLUS
	standard	310 H		
	230 V 50 Hz 3,05 kW			LUX 40 EL PLUS DA
	230 V 3 50 Hz 4,45 kW	ø 310		LUX 40 EL PLUS HR
	400 V 3N 50 Hz 4,45 kW			
	HR:	400x400		LUX 40 EL PLUS HR DA
	Cold water supply			
 RACK EQUIPMENT 2 X C121 1 X 10728 1 X 15060				
LUX 60 EL PLUS H+	ELECTRONIC 6 PROGRAMS			
	Multivoltage		600x610x850 H 65 kg	LUX 60 EL PLUS H+
	standard	325 H		
	400 V 3N 50 Hz 5,15 kW			LUX 60 EL PLUS DA H+
	230 V 3 50 Hz 5,15 kW	ø 340		LUX 60 EL PLUS HR H+
	230 V 50 Hz 5,15 kW			
	HR:	500x500		LUX 60 EL PLUS HR DA H+
	Cold water supply			
 RACK EQUIPMENT 1 X C40 1 X C44 1 X 15060				
			530x325x25 H	
LUX 85 EL PLUS	ELECTRONIC 4 PROGRAMS			
	Multivoltage		600x700x1380 H 87 kg	LUX 85 EL PLUS
	standard	440 H		
	400 V 3N ~ 50 Hz 10,2 kW			
	ø 450			
		500x500		
 RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X 15060				
			530x325x25 H	

A₀=30 Special programs complying with A₀=30 on the scale of thermo-disinfection according to the norm EN ISO 15883-1. The Hygiene+ models include 2 special cycles, a short one of 180 seconds and a longer one of 630 seconds, ensuring compliance with high levels of hygiene thanks to high temperatures and long cycles.

PLUS Rinse with constant temperature, pressure and stabilized consumption

X With special basket to be ordered

OPTIONS

RO XP PS DDE DB DBE													ST FS CR PS+FS TS CONNECTIVITY BT WRAS DVGW PAP FLOAT												
Model	220-240 V 50 Hz	380-415 V 3N 50 Hz	220-240 V 3 50 Hz	380-415 V 3 50 Hz	440 V 3 60 Hz	60 Hz	Osmosis Connection	Extra Power	Drain Pump	Det. Dispenser	Rinse- Aid disp.	Peristaltic Rinse-Aid Disp.	Model	Soft start	Cold Rinse	Round Basket	DP+ Cold R.	Electr. Timer +Thermostop	Connectivity (HACCP)	Break Tank	Wras	DVGW	Booster Pump	Probes Lack Det/rinse aid	
LUX 40 EL	●	M	M	----	----	€		□	€	●	●	€	LUX 40 EL	●	€	€	€	●	€	€	€	€	€	€	
LUX 40 EL DA	●	M	M	----	----	€		□	€	●	●	€	LUX 40 EL DA	●	----	€	----	●	€	----	----	----	€	€	
LUX 60 EL	M	●	M	€	€	€		€	€	●	●	€	LUX 60 EL	●	€	----	€	●	€	€	€	€	€	€	
LUX 60 EL DA	M	●	M	----	----	€		€	€	●	●	€	LUX 60 EL DA	●	----	----	----	●	€	----	€	€	€	€	
LUX 60 EL H+	M	●	M	€	€	€		€	€	●	●	€	LUX 60 EL H+	●	€	----	€	●	€	€	€	€	€	€	
LUX 60 EL H+ DA	M	●	M	----	----	€		€	€	●	●	€	LUX 60 EL H+ DA	●	----	----	----	●	€	----	€	€	€	€	
LUX 70 EL	□	●	M	----	----	€		----	€	●	●	€	LUX 70 EL	●	€	----	€	●	€	€	€	----	€	€	
LUX 70 EL DA	□	●	M	----	----	€		----	€	●	●	€	LUX 70 EL DA	●	----	----	----	●	€	----	€	----	----	€	
LUX 40 EL PLUS	●	M	M	----	----	€		€	€	●	----	●	LUX 40 EL PLUS	●	€	€	€	●	€	●	€	€	●	€	
LUX 40 EL PLUS DA	●	M	M	----	----	€		€	€	●	----	●	LUX 40 EL PLUS DA	●	----	€	----	●	€	----	----	----	●	€	
LUX 40 EL PLUS HR	●	M	M	----	----	€		€	€	●	----	●	LUX 40 EL PLUS HR	●	----	€	----	●	€	●	----	----	●	€	
LUX 40 EL PLUS HR DA	●	M	M	----	----	€		€	€	●	----	●	LUX 40 EL PLUS HR DA	●	----	€	----	●	€	----	----	----	●	€	
LUX 60 EL PLUS H+	M	●	M	€	€	€		€	€	●	----	●	LUX 60 EL PLUS H+	●	€	----	€	●	€	●	€	€	●	€	
LUX 60 EL PLUS DA H+	M	●	M	----	----	€		€	€	●	----	●	LUX 60 EL PLUS DA H+	●	----	----	----	●	€	----	€	€	●	€	
LUX 60 EL PLUS HR H+	M	●	M	€	€	€		€	€	●	----	●	LUX 60 EL PLUS HR H+	●	----	----	----	●	€	●	----	----	●	€	
LUX 60 EL PLUS HR DA H+	M	●	M	----	----	€		€	€	●	----	●	LUX 60 EL PLUS HR DA H+	●	----	----	----	●	€	----	----	----	●	€	
LUX 85 EL PLUS	€	●	□	----	----	€		€	€	●	----	●	LUX 85 EL PLUS	●	----	----	----	●	----	●	€	€	●	€	

- Standard
- Not available
- Upon request
- DA

Built-in automatic water softener
- E

Electronic
- M

Multivoltage
- XP

Recommended with water 8-55 °C, for LUX 40 EL models only with standard voltage for other voltages please contact us
- Water supply 55 °C
- EAC label upon request

- 380-415 V 3N 50 HZ**
220-240 V 3 50 HZ

For the models LUX 40 EL “upon request” provide extra power
- 220 -240 V 50 HZ**

For the models LUX 85 Plus max boiler heating element 6000W
- CONNECTIVITY**









Includes HACCP option. 10-year plan
- BT - WRAS**







Booster pump included
- DVGW**

Components prescribed by DVGW on request (check option compatibility with the manufacturer)
- SOFT START**

Progressive start of the wash pump
- H+ (HYGIENE+)**

2 cycles of 630 and 180 seconds with high temperatures, reaching up to 70 °C for washing and 90 °C for rinsing
Option compatibility to be confirmed by the manufacturer after verification
- All models: independent wash and rinse arms
- Option compatibility to be confirmed by the manufacturer after verification

	Description	Capacity	Dimensions	Code	
	GLASS BASKET		400x400x135 H	C 121	
	SLOPED GLASS BASKET	Ø 10 max	500x500x200 H	C 26	
	GLASS BASKET WITH GLASS SUPPORT AND ANTI-TIPPING LID		500x500x235 H	C 135	
	SLOPED GLASS BASKET	Ø 90 max Ø 120 max	400x400x185 H 400x400x160 H	C 123 C 79	
	LARGE MESH BASKET	For glasses	500x500x105 H	C 44	
	ROUND GLASS BASKET ROUND BASKET SUPPORT	Basket Support	Ø 400x145 H 400x400	C 16 C 38	
	HOLDER FOR GLASS SUPPORT	For glass support (C112-C113-C114)	500x500x50 H	C111	
	GLASS SUPPORT	5x5 Glass Ø 87 mm (C111)	500x500x50 H	C 112	
	GLASS SUPPORT	4x4 Glass Ø 110 mm (C111)	500x500x50 H	C 113	
	GLASS SUPPORT	6x6 Glass Ø 72 mm (C111)	500x500x50 H	C 114	
	PLATE BASKET	18 Plates	500x500x105 H	C 40	
	PLATE BASKET	12 Plates	400x400x120 H	C 31	

	Description	Capacity	Dimensions	Code	
	SAUCER HOLDER	14 Saucers	300x100x90 H	10728	
	CUTLERY BASKET		Ø 120x120 H	15060	
	GASTRONORM TRAYS BASKET	6 pcs, max. depth 25 mm	530x325x105 H 530x325x105 H	C 43 C 43/B	
	STAND	Stainless steel stand	592x535x500 H	999900517	
	SINK UNIT FOR UNDER-COUNTER MODELS	Sink 500x400x300H	1200x700x850 H	K 5/20*	
	WATER SOFTENER	12 l	Ø 200x500 H	DEP 12	
	AUTOMATIC WATER SOFTENER	12 l (max 800 l)	315x510x685 H	DEP 12-AUT	
	OSMOSIS FOR ELECTRON 400 PLUS MODELS	230 V 50 Hz - 250 W 5° C - 30° C Flow rate 180-210l/h - 15°C Not suitable for machine with integrated water softener Special basket dotation	145x560x580 H 25 Kg	K OS180	
	OSMOSIS FOR ELECTRON 500 PLUS MODELS	230 V 50 Hz - 250 W 5° C - 30° C Flow rate 240 l/h Not suitable for machine with integrated water softener Special basket dotation	270x411x451 H 18 Kg	K OS240	

* Wooden cage +2% minimum + €
Special dimensions for tables upon request
Tables shown in right-to-left version



We simply combined the highest specs and ultimate new technology to the time-tested name and features. Premium is our answer to the new high standards of hygiene and cleanliness of the worldwide market, keeping our renowned low operating costs thanks to the Optimal Rinse system. Our HYGIENE+ cycles will guarantee to work safely by keeping top sanitation levels. The compact model with lower usable height, the settable additional cycle and the available self-

monitoring technology and Connectivity makes the Premium the range you have been expecting. An intuitive and interactive electronic panel will lead you through the new functions of your dishwasher. Its self-diagnosis system notifies any anomaly and clearly shows the different steps of the cycle and status of your dishwasher. Eight wash cycles (ten for the Hygiene+ version) and the easy change of voltage make these machines incredibly versatile and easy to install.

$A_0=60$
HYGIENE+

HYGIENE+ SYSTEM

Our HYGIENE + models, with high temperatures and long cycles, ensure compliance with high levels of hygiene, nowadays more essential than ever for our personal health. We designed this range according to strict standards and parameters of thermal disinfection. All our HYGIENE + models obtain the A_0 60 level, reducing pathogenic microorganisms and bacterial load according to the norm EN ISO 15883-1. Two cycles with high temperatures (180 and 630 seconds), reaching up to 75°C for washing and 90°C for rinsing, guarantee a full compliance with the disinfection principles.

FEATURES

- OPTIMAL-RINSE (optimal rinse technology): water consumption rate among the lowest on the market, consequent reduction of electricity and chemicals consumptions
- Soft door opening and programmable START function when the door gets closed
- Combined system of wash and rinse arms in stainless steel with unblockable nozzles
- Innovative S/S filter improving the filtration of the wash water
- Partial drain of the waste wash water before rinsing
- Standard version: Eight wash cycles, six with partial drain of the wash water and two with total drain of the wash water before rinsing
- Hygiene+ version: Ten wash cycles, six with partial drain of the wash water, two with total drain of the wash water before rinsing and two Hygiene+ programs
- Double skin machine and double skin insulated door
- Electronic control panel with TFT screen and multichromatic START key to instantly view all functions
- Self-diagnostic system with two different control levels for user and service people depending on the failure
- Easy-change voltage setting, directly from the cables connection
- Water consumption and working time control system
- Detergent and rinse-aid peristaltic dispensers included
- NEW: Detergent and rinse-aid dosage setting, directly from the control panel
- Built-in drain pump
- Thermostop with Energy Saving device
- Self-cleaning cycle
- Soft Start wash pump
- Thermal insulation of boiler
- CONNECTIVITY remote control compliant with the HACCP norms (on request)
- Automatic softened version with continuous self-regeneration

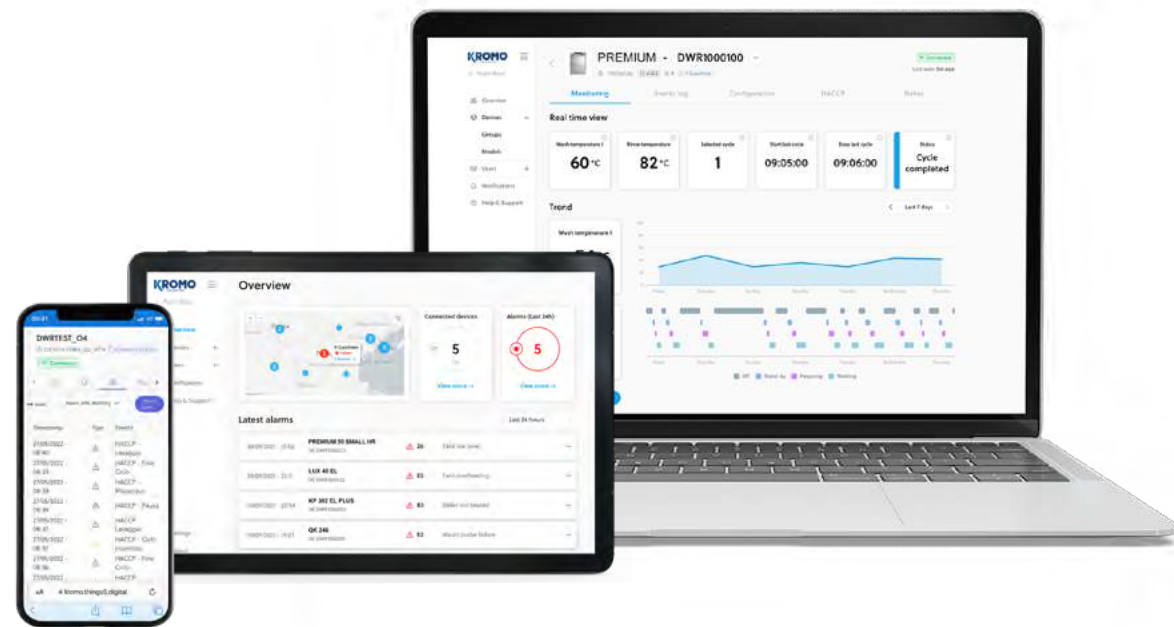


CONNECTIVITY 4.0

WHEREVER YOU ARE...

YOUR DISHWASHER, JUST A CLICK AWAY

You will be constantly connected to the machine to monitor the work phases, review any eventual alarm and configure remotely the operating parameters according to your needs. Compliant with HACCP norms. Compliant with HACCP norms.



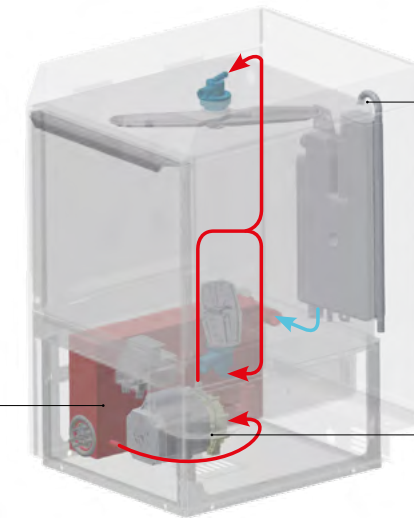
PLUS SYSTEM

GUARANTEED RINSE EVEN

WITH LOW PRESSURE OF THE WATER INLET

We have developed an innovative rinsing system at constant temperature, consumption and water pressure, regardless of external conditions.

- STEADY WATER TEMPERATURE IN THE BOILER (85°C)
- STABILIZED PRESSURE THROUGHOUT THE RINSE PHASE
- CLEANER WATER LESS WASTE



BREAK TANK

The Break Tank system prevents the heated water of the boiler to go back and mix with the fresh water supply.

ATMOSPHERIC BOILER

The water temperature in the boiler remains constant at 85°C throughout the rinse, as the boiler refill only occurs once the rinse cycle is done.

RINSE PUMP

The water is sucked from the boiler through a rinse pump and is sent to the rinse nozzles. The correct pressure is ensured regardless of the water inlet pressure and temperature.



View all the working parameters and event records, working hours and any problem at any time.



In case of problem, the machine promptly alerts you. The technician can intervene remotely to solve the problem or anticipate the needed parts for an on-site intervention.



A daily activity report is available with all the events related to the dishwasher in a detailed spreadsheet with HACCP data.

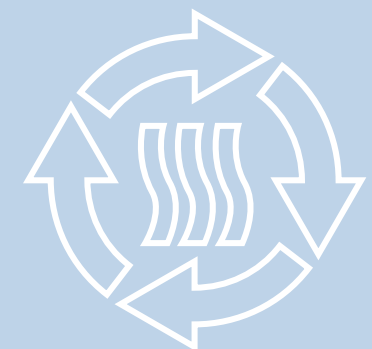


Our Connectivity system is a revolutionary device limiting and facilitating the eventual intervention of a technician who can anticipate the necessary parts to be replaced, saving time and money.




ENERGY RECOVERY


(Heat recovery and steam condenser)

The ENERGY RECOVERY system uses the heat produced by the machine to preheat the inlet cold water. This is an immediate saving on energy costs. Additionally, an optimal temperature in the dishwashing area is achieved as the air is no more affected by steam and humidity.



Heat Recovery

Model	Voltage	Capacity	Poids	Code
PREMIUM 40 ELECTRONIC 8 PROGRAMS				
 RACK EQUIPMENT 2 X C121 1 X 10728 1 X 15060	Multivoltage			PREMIUM 40
	standard 230 V 50 Hz 3,25 kW	 310 H		PREMIUM 40 DA
	230 V 3 50 Hz 4,75 kW	 Ø 310	460x550x780 H 47 kg	PREMIUM 40 HR
	400 V 3N 50 Hz 4,75 kW	 400x400		PREMIUM 40 HR DA
	HR: Cold water supply			
PREMIUM 50 SMALL ELECTRONIC 8 PROGRAMS				
 RACK EQUIPMENT 1 X C40 1 X C44 1 X 15060	Multivoltage			PREMIUM 50 SMALL
	standard 400 V 3N 50 Hz 6,35 kW	 260 H		PREMIUM 50 SMALL DA
	230 V 3 50 Hz 6,35 kW	 Ø 260	600x610x730 H 60 kg	PREMIUM 50 SMALL HR
	230 V 50 Hz 6,35 kW	 500x500		PREMIUM 50 SMALL HR DA
	HR: Cold water supply			
PREMIUM 50 ELECTRONIC 8 PROGRAMS				
 RACK EQUIPMENT 1 X C40 1 X C44 1 X 15060	Multivoltage			PREMIUM 50
	400 V 3N 50 Hz 6,65 kW	 340 H		PREMIUM 50 DA
	230 V 3 50 Hz 6,65 kW	 Ø 340	600x610x850 H 65,5 kg	PREMIUM 50 HR
	230 V 50 Hz 6,65 kW	 500x500	 530x325x25 H	PREMIUM 50 HR DA
	HR: Cold water supply			

Model	Voltage	Capacity	Poids	Code
PREMIUM 50 H+ ELECTRONIC 10 PROGRAMS				
 A₀=60 HYGIENE + RACK EQUIPMENT 1 X C40 1 X C44 1 X 15060	Multivoltage			PREMIUM 50 H+
	standard 400 V 3N 50 Hz 6,65 kW	 340 H	600x610x850 H 65,5 kg	PREMIUM 50 DA H+
	230 V 3 50 Hz 6,65 kW	 Ø 340	 530x325x25 H	PREMIUM 50 HR H+
	230 V 50 Hz 6,65 kW	 500x500		PREMIUM 50 HR DA H+
	HR: Cold water supply			

A₀=60 Special programs complying with A₀=60 on the scale of thermo-disinfection according to the norm EN ISO 15883-1. All ou Hygiene+ models reach the A₀ 60 level defining the minimum reduction level of pathogenic microorganisms and bacterial load. In addition, our Plus Rinsing System guarantees a perfect rinse with steady temperature and water pressure for optimum hygienic results

X With special basket to be ordered

OPTIONS

					RO	PS	DDE	ST	DBE						FS	CR	TS	CONNECTIVITY	BT	WRAS	DVGW	PR	FLOAT	SENSOR
Model	220-240 V 50 Hz	380-415 V 3N 50 Hz	220-240 V 3 50 Hz	60 Hz	Osmosis Connection	Drain Pump	Detergent Dispenser	Soft Start	Peristaltic Rinse-Aid Disp.	Model	Cold Rinse	Round Basket	Electr. timer + Thermo- stop	Connectivity (HACCP)	Break Tank	Wras	DVGW	Rinse pump	Probes Lack Det/rinse aid	Anti- flooding function				
PREMIUM 40	●	M	M	€	□	●	●	●	●	PREMIUM 40	€	€	●	€	●	€	€	●	€	€				
PREMIUM 40 DA	●	M	M	€	----	●	●	●	●	PREMIUM 40 DA	----	€	●	€	----	----	----	●	€	€				
PREMIUM 40 HR	●	M	M	€	□	●	●	●	●	PREMIUM 40 HR	----	€	●	€	●	----	----	●	€	€				
PREMIUM 40 HR DA	●	M	M	€	----	●	●	●	●	PREMIUM 40 HR DA	----	€	●	€	----	----	----	●	€	€				
PREMIUM 50 SMALL	M	●	M	€	□	●	●	●	●	PREMIUM 50 SMALL	€	----	●	€	●	€	€	●	€	€				
PREMIUM 50 SMALL DA	M	●	M	€	----	●	●	●	●	PREMIUM 50 SMALL DA	----	----	●	€	----	----	----	●	€	€				
PREMIUM 50 SMALL HR	M	●	M	€	□	●	●	●	●	PREMIUM 50 SMALL HR	----	----	●	€	●	----	----	●	€	€				
PREMIUM 50 SMALL HR DA	M	●	M	€	----	●	●	●	●	PREMIUM 50 SMALL HR DA	----	----	●	€	----	----	----	●	€	€				
PREMIUM 50	M	●	M	€	□	●	●	●	●	PREMIUM 50	€	----	●	€	●	€	€	●	€	€				
PREMIUM 50 DA	M	●	M	€	----	●	●	●	●	PREMIUM 50 DA	----	----	●	€	----	----	----	●	€	€				
PREMIUM 50 HR	M	●	M	€	□	●	●	●	●	PREMIUM 50 HR	----	----	●	€	●	----	----	●	€	€				
PREMIUM 50 HR DA	M	●	M	€	----	●	●	●	●	PREMIUM 50 HR DA	----	----	●	€	----	----	----	●	€	€				
PREMIUM 50 H+	M	●	M	€	□	●	●	●	●	PREMIUM 50 H+	€	----	●	€	●	€	€	●	€	€				
PREMIUM 50 DA H+	M	●	M	€	----	●	●	●	●	PREMIUM 50 DA H+	----	----	●	€	----	----	----	●	€	€				
PREMIUM 50 HR H+	M	●	M	€	□	●	●	●	●	PREMIUM 50 HR H+	----	----	●	€	●	----	----	●	€	€				
PREMIUM 50 HR DA H+	M	●	M	€	----	●	●	●	●	PREMIUM 50 HR DA H+	----	----	●	€	----	----	----	●	€	€				

- DA

Built-in automatic water softener
- HR

In case of osmotic water supply, it is suggested to feed the machine with electrical conductivity of more than 200 microsiemens
In case of cold water supply for rinse (8-15 °C), the heat recovery option is mandatory
- M

Multivoltage
- Standard
- Not available
- Upon request

- SOFT START

Progressive start of the wash pump
- WRAS - DVGW









Not available with FS
- DVGW







Components prescribed by DVGW on request (check option compatibility with the manufacturer)
- CONNECTIVITY

Includes HACCP option. 10-year plan
- 380-415 V 3N 50 HZ
220-240 V 3 50 HZ

For the models PREMIUM 40 “upon request” provide extra power
- H+ (HYGIENE+)

2 cycles of 630 and 180 seconds with high temperatures, reaching up to 75 °C for washing and 90 °C for rinsing
Option compatibility to be confirmed by the manufacturer after verification
Water supply 55 °C
EAC label upon request

	Description	Capacity	Dimensions	Code	€
	GLASS BASKET		400x400x135 H	C 121	
	SLOPED GLASS BASKET	Ø 10 max	500x500x200 H	C 26	
	GLASS BASKET WITH GLASS SUPPORT AND ANTI-TIPPING LID		500x500x235 H	C 135	
	SLOPED GLASS BASKET	Ø 90 max Ø 120 max	400x400x185 H 400x400x160 H	C 123 C 79	
	LARGE MESH BASKET	For glasses	500x500x105 H	C 44	
	ROUND GLASS BASKET ROUND BASKET SUPPORT	Basket Support	Ø 400x145 H 400x400	C 16 C 38	
	HOLDER FOR GLASS SUPPORT	For glass support (C112-C113-C114)	500x500x50 H	C111	
	GLASS SUPPORT	5x5 Glass Ø 87 mm (C111)	500x500x50 H	C 112	
	GLASS SUPPORT	4x4 Glass Ø 110 mm (C111)	500x500x50 H	C 113	
	GLASS SUPPORT	6x6 Glass Ø 72 mm (C111)	500x500x50 H	C 114	
	PLATE BASKET	18 Plates	500x500x105 H	C 40	
	PLATE BASKET	12 Plates	400x400x120 H	C 31	

	Description	Capacity	Dimensions	Code	€
	SAUCER HOLDER	14 Saucers	300x100x90 H	10728	
	CUTLERY BASKET		Ø 120x120 H	15060	
	GASTRONORM TRAYS BASKET	6 pcs, max. depth 25 mm	530x325x105 H	C 43/B	
	STAND	Stainless steel stand	592x535x500 H	999900517	
	SINK UNIT FOR UNDER-COUNTER MODELS	Sink 500x400x300H	1200x700x850 H	K 5/20*	
	WATER SOFTENER	12 l	Ø 200x500 H	DEP 12	
	AUTOMATIC WATER SOFTENER	12 l (max 800 l)	315x510x685 H	DEP 12-AUT	
	OSMOSIS FOR OPTIMA 400 MODELS	230 V 50 Hz - 250 W 5° C - 30° C Flow rate 180-210l/h - 15°C Not suitable for machine with integrated water softener Special basket dotation	145x560x580 H 25 Kg	K OS180	
	OSMOSIS FOR OPTIMA 500 MODELS	230 V 50 Hz - 250 W 5° C - 30° C Flow rate 240 l/h Not suitable for machine with integrated water softener Special basket dotation	270x411x451 H 18 Kg	K OS240	

* Wooden cage +2% minimum + €
Special dimensions for tables upon request
Tables shown in right-to-left version



The Kromo hood-type dishwashers offer a wide range of models, from the ones that can be equipped with the most advanced options, to the most innovative types, designed with avant-garde electronics and with all options included. Our products have evolved together with our experience and our customers' hints and insights.

Therefore we are able to produce tailor-made models that fulfil our final customers' criteria of functionality, reliability and versatility. Our aim is to reduce consumptions in terms of energy, water and chemical products, therefore granting the final user global savings, but also less pollution and waste of natural resources.



TOUCH PANEL

The LED panel displays the temperatures of both tank and boiler, the wash cycle and status and eventual main alarm codes for malfunctions. There are four wash cycles available. These innovations are designed to provide Kromo's customers with even more user friendly machines, maintaining the same high performances.

FEATURES HOOD 800 / HOOD 110

- Two wash cycles
- HOOD operating start/stop functions
- Tank deep-formed bottom
- Pump filter
- Built-in rinse-aid pump
- Tank and boiler thermometres
- Easily removable basket support
- Linear or corner layouts
- Innovative system of coupled wash and rinse arms in polypropylene and fiber of glass (HOOD 800)
- Independent stainless steel wash arms and polypropylene and fiber of glass rinse arms (HOOD 110)
- Surface filters in polypropylene (HOOD 800)
- S/S surface filters (HOOD 110)
- Built-in water softener available (HOOD 110)

FEATURES HOOD 800 T / HOOD 110 T

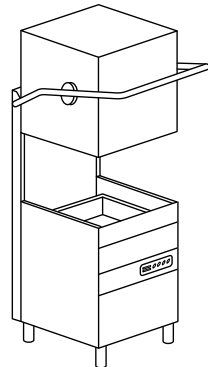
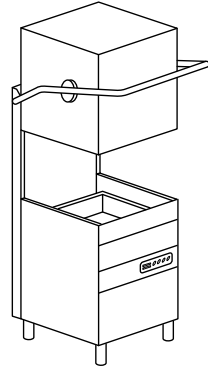
- Easy and intuitive LED control panel
- Four wash cycles
- HOOD operating start/stop functions
- Tank deep-formed bottom
- Built-in rinse-aid pump
- Tank and boiler thermometres
- Surface filters
- Easily removable basket support
- Linear or corner layouts
- Self-cleaning cycle
- Innovative system of coupled wash and rinse arms in polypropylene and fiber of glass (HOOD 800 T)
- Independent stainless steel wash arms and polypropylene and fiber of glass rinse arms (HOOD 110 T)
- Surface filters in polypropylene (HOOD 800 T)
- S/S surface filters (HOOD 110 T)
- Automatic built-in water softener available (HOOD 110 T)

HOOD 800 - 110

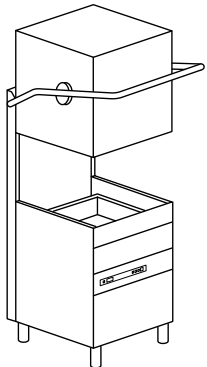
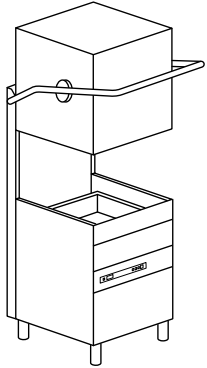
SINGLE SKIN HOOD-TYPE
DISHWASHERS

KROMO

HOOD-TYPE
DISHWASHERS

Model		Voltage	Capacity	Poids	Code
HOOD 800	2 PROGRAMS				
	RACK EQUIPMENT 2 X C40 1 X C44 2 X 15060	400 V 3N ~ 50 Hz 6,9 kW	 Ø 410  500x500	720x735x 1445/1880 H 100 kg  530x325x25 H	HOOD 800
HOOD 110	2 PROGRAMS				
	RACK EQUIPMENT 2 X C40 1 X C44 2 X 15060	400 V 3N ~ 50 Hz 10,2 kW	 Ø 410  500x500	720x735x 1445/1880 H 100 kg  530x325x25 H	HOOD 110 HOOD 110 D

X With special basket to be ordered

Model		Voltage	Capacity	Poids	Code
HOOD 800 T	ELECTRONIC 4 PROGRAMS				
	RACK EQUIPMENT 2 X C40 1 X C44 2 X 15060	400 V 3N ~ 50 Hz 6,9 kW	 Ø 410  500x500	720x735x 1445/1880 H 100 kg  530x325x25 H	HOOD 800 T HOOD 800 T DA
HOOD 110 T	ELECTRONIC 4 PROGRAMS				
	RACK EQUIPMENT 2 X C40 1 X C44 2 X 15060	400 V 3N ~ 50 Hz 10,2 kW	 Ø 410  500x500	720x735x 1445/1880 H 100 kg  530x325x25 H	HOOD 110 T HOOD 110 T DA

OPTIONS










							XP	PS	DDE									
Model	220-240 V 50 Hz	380-415 V 3N 50 Hz	220-240 V 3 50 Hz	380-415 V 3 50 Hz	440 V 3 60 Hz	60 Hz	Extra Power	Drain Pump	Detergent Dispenser	Model	Rinse-Aid Dispenser	Peristaltic Rinse-Aid Disp.	Electr. Timer +Thermostop	Break Tank	WRAS	DVGW	PAP	DF
HOOD 800	€	●	□	----	----	€	€	€	€	HOOD 800	●	€	●	€	€	€	€	●
HOOD 110 *	€	●	□	----	----	€	€	€	€	HOOD 110 *	●	€	●	€	€	€	€	●
HOOD 110 D	€	●	□	----	----	€	€	€	€	HOOD 110 D	●	€	●	----	----	----	€	●
HOOD 800 T	€	●	□	----	----	€	€	€	€	HOOD 800 T	●	€	●	€	€	€	€	●
HOOD 800 T DA	€	●	□	----	----	€	€	€	€	HOOD 800 T DA	●	€	●	----	----	----	€	●
HOOD 110 T	€	●	□	----	----	€	€	€	€	HOOD 110 T	●	€	●	€	€	€	€	●
HOOD 110 T DA	€	●	□	----	----	€	€	€	€	HOOD 110 T DA	●	€	●	----	----	----	€	●





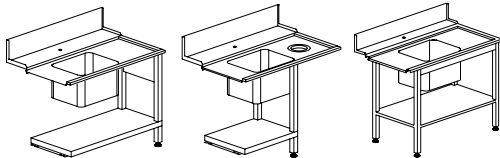
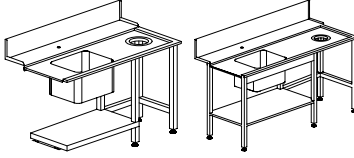



- Standard
- Upon request
- Not available
- D Built-in water softener
- DA Built-in automatic water softener
- T Soft touch panel
- * Construction according to UL-NSF standards upon request

EAC label upon request

Water supply 55 °C (not on HR version)

- 230-240 V 50 HZ** For HOOD 110 total power 7,2 kW upon request
- XP** In case of cold water supply for rinse (8-55 °C) and without any heat recovery, the extra power option is mandatory. +3000 W with standard voltage only, for other voltages please contact us. In case of cold water supply for rinse (8-15 °C), We recommend the heat recovery option, if available on the selected model
- BT - WRAS - DVGW** Booster pump included.
- DVGW** Components prescribed by DVGW on request (check option compatibility with the manufacturer)
- Option compatibility to be confirmed by the manufacturer after verification.

	Description	Capacity	Poids	Code	
	SLOPED GLASS BASKET	Ø 10 max	500x500x200 H	C 26	
	GLASS BASKET WITH GLASS SUPPORT AND ANTI-TIPPING LID		500x500x235 H	C 135	
	LARGE MESH BASKET	For glasses	500x500x105 H	C 44	
	HOLDER FOR GLASS SUPPORT	For glass support (C112-C113-C114)	500x500x50 H	C111	
	GLASS SUPPORT	5x5 Glass Ø 87 mm (C111)	500x500x50 H	C 112	
	GLASS SUPPORT	4x4 Glass Ø 110 mm (C111)	500x500x50 H	C 113	
	GLASS SUPPORT	6x6 Glass Ø 72 mm (C111)	500x500x50 H	C 114	
	PLATE BASKET	18 Plates	500x500x105 H	C 40	
	GASTRONORM TRAYS BASKET	6 pcs max depth 25mm	500x500x105 H	C 43/B	
	CUTLERY BASKET	Standard (2 pcs)	Ø 120x120 H	15060	
	WATER SOFTENER	12 l	Ø 200x500 H	DEP 12	
	AUTOMATIC WATER SOFTENER	12 l (max 800 l)	315x510x685 H	DEP 12-AUT	

	Description	Capacity	Poids	Code	
	SHELF	Only for exit	600x510	K 2ME	
	TABLE		650x510x860 H	K 4/65	
	HOOD CONNECTION SHELF			KIT DUO	
	CORNER TABLE		590x590x860 H	K 2ANG	
	TABLE		700x590x860 H	K 4/70B	
			1200x590x860 H	K 4/120B	
			1200x590x860 H	K 4B	
	Sink 500x400x270 H		1200x730x860 H	K 5	
			1200x730x860 H	K 5F	
			1200x730x860 H	K 55	
	Sink 500x400x270 H		1500x730x860 H	K 8	
			1500x730x860 H	K 8E	
			1800x730x860 H	K 9	
	SHELF		1515x620x660 H	K 7M16*	
	GRADING TABLE WITH RUBBER RING	Waste hole and special dimensions upon request	2315x620x660 H	K 7M24*	
	FLEXIBLE SHOWER complete with mixing group and lever tap, to be fixed to the wall		1000 H	K 1	
	FLEXIBLE SHOWER complete with mixing group and lever tap, to be fixed to the wall and intermediate tap		1000 H	K 1HR	
	STAINLESS STEEL WASTE BIN	Basic model	Ø 400x570 H	K 7/1	
		With wheels	Ø 400x570 H	K 7/2	
		With wheels and	Ø 400x570 H	K 7/3	

* Wooden cage +2% minimum + €
Special dimensions for tables upon request
Tables shown in right-to-left version



The Kromo hood-type dishwashers offer a wide range of models, from the ones that can be equipped with the most advanced options, to the most innovative types, designed with avant-garde electronics and with all options included. Our products have evolved together with our experience and our customers' hints and insights.

Therefore we are able to produce tailor-made models that fulfil our final customers' criteria of functionality, reliability and versatility. Our aim is to reduce consumptions in terms of energy, water and chemical products, therefore granting the final user global savings, but also less pollution and waste of natural resources.



TOUCH PANEL

The LED panel displays the temperatures of both tank and boiler, the wash cycle and status and eventual main alarm codes for malfunctions. There are four wash cycles available. These innovations are designed to provide Kromo's customers with even more user friendly machines, maintaining the same high performances.

FEATURES HOOD 110 I

- Two wash cycles
- Hood operating start/stop functions
- Tank deep-formed bottom
- Pump filter
- S/S surface filters
- Double skin insulated hood
- Built-in rinse-aid pump
- Tank and boiler thermometres
- Easily removable basket support
- Linear or corner layouts
- Independent stainless steel wash arms and polypropylene and fiber of glass rinse arms
- Built-in water softener available

FEATURES HOOD 110 I T

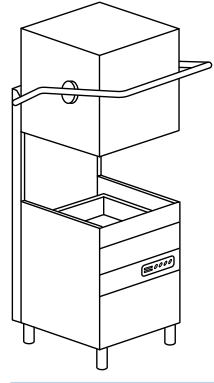
- Easy and intuitive LED control panel
- Four wash cycles
- Hood operating start/stop functions
- Tank deep-formed bottom
- Built-in rinse-aid pump
- Tank and boiler thermometres
- Surface filters
- Easily removable basket support
- Double skin insulated hood
- Linear or corner layouts
- Independent stainless steel wash arms and polypropylene and fiber of glass rinse arms
- Self-cleaning cycle
- Automatic built-in water softener available

HOOD 110 I

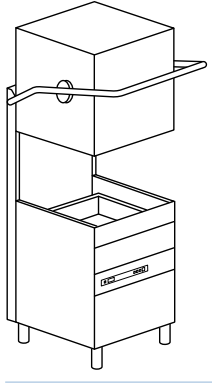
INSULATED
HOOD-TYPE DISHWASHERS

KROMO

HOOD-TYPE
DISHWASHERS

Model		Voltage	Capacity	Dimensions	Code
HOOD 110 I	2 PROGRAMS				
	RACK EQUIPMENT 2 X C40 1 X C44 2 X 15060	400 V 3N ~ 50 Hz 10,2 kW	 ø 410	720x735x 1445/1880 H 100 kg	HOOD 110 I
				 530x325x25 H	HOOD 110 I D

 With special basket to be ordered











Model		Voltage	Capacity	Poids	Code
HOOD 110 I T	ELECTRONIC 4 PROGRAMS				
	RACK EQUIPMENT 2 X C40 1 X C44 2 X 15060	400 V 3N ~ 50 Hz 10,2 kW	 ø 410	720x735x 1445/1880 H 100 kg	HOOD 110 I T
				 530x325x25 H	HOOD 110 I T DA





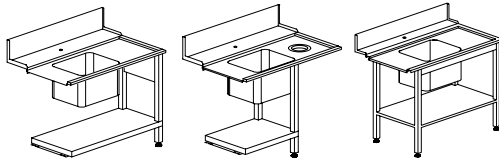




OPTIONS

							XP	PS	DDE	DB									
Model	220-240 V 50 Hz	380-415 V 3N 50 Hz	220-240 V 3 50 Hz	380-415 V 3 50 Hz	440 V 3 60 Hz	60 Hz	Extra Power	Drain Pump	Detergent Dispenser	Rinse-Aid Dispenser	Model	Peristaltic Rinse-Aid Disp.	Electr. Timer +Thermostop	Break Tank	WRAS	DVGW	Booster Pump	Double Skin	Surface Filters Kit
HOOD 110 I	€	●	□	----	----	€	€	€	€	●	HOOD 110 I	€	●	€	€	€	€	●	●
HOOD 110 I D	€	●	□	----	----	€	€	€	€	●	HOOD 110 I D	€	●	----	----	----	€	●	●
HOOD 110 I T	€	●	□	----	----	€	€	€	€	●	HOOD 110 I T	€	●	€	€	€	€	●	●
HOOD 110 I T DA	€	●	□	----	----	€	€	€	€	●	HOOD 110 I T DA	€	●	----	----	----	€	●	●

- Standard
 - Upon request
 - Not available
 - I Insulated hood
 - D Built-in water softener
 - DA Built-in automatic water softener
 - T Soft touch panel
- EAC label upon request
- Water supply 55 °C (not on HR version)

- 230-240 V 50 HZ** For HOOD 110 total power 7,2 kW upon request
- XP** In case of cold water supply for rinse (8-55 °C) and without any heat recovery, the extra power option is mandatory. +3000 W with standard voltage only, for other voltages please contact us. In case of cold water supply for rinse (8-15 °C). We recommend the heat recovery option, if available on the selected model.
- BT - WRAS - DVGW** Booster pump included.
- DVGW** Components prescribed by DVGW on request (check option compatibility with the manufacturer)
- Option compatibility to be confirmed by the manufacturer after verification.

	Description	Capacity	Dimensions	Code	
	SLOPED GLASS BASKET	Ø 10 max	500x500x200 H	C 26	
	GLASS BASKET WITH GLASS SUPPORT AND ANTI-TIPPING LID		500x500x235 H	C 135	
	LARGE MESH BASKET	For glasses	500x500x105 H	C 44	
	HOLDER FOR GLASS SUPPORT	For glass support (C112-C113-C114)	500x500x50 H	C111	
	GLASS SUPPORT	5x5 Glass Ø 87 mm (C111)	500x500x50 H	C 112	
	GLASS SUPPORT	4x4 Glass Ø 110 mm (C111)	500x500x50 H	C 113	
	GLASS SUPPORT	6x6 Glass Ø 72 mm (C111)	500x500x50 H	C 114	
	PLATE BASKET	18 Plates	500x500x105 H	C 40	
	GASTRONORM TRAYS BASKET	6 pcs max depth 25mm	500x500x105 H	C 43/B	
	CUTLERY BASKET	Standard (2 pcs)	Ø 120x120 H	15060	
	WATER SOFTENER	12 l	Ø 200x500 H	DEP 12	
	AUTOMATIC WATER SOFTENER	12 l (max 800 l)	315x510x685 H	DEP 12-AUT	

	Description	Capacity	Dimensions	Code	
	SHELF	Only for exit	600x510	K 2ME	
	TABLE		650x510x860 H	K 4/65	
	HOOD CONNECTION SHELF			KIT DUO	
	CORNER TABLE		590x590x860 H	K 2ANG	
	TABLE		700x590x860 H	K 4/70B	
			1200x590x860 H	K 4/120B	
			1200x590x860 H	K 4B	
	Sink 500x400x270 H		1200x730x860 H	K 5	
			1200x730x860 H	K 5F	
			1200x730x860 H	K 55	
	Sink 500x400x270 H		1500x730x860 H	K 8	
			1500x730x860 H	K 8E	
			1800x730x860 H	K 9	
	SHELF		1515x620x660 H	K 7M16*	
	GRADING TABLE WITH RUBBER RING	Waste hole and special dimensions upon request	2315x620x660 H	K 7M24*	
	FLEXIBLE SHOWER complete with mixing group and lever tap, to be fixed to the wall		1600x1000x850 H	K 7A/1600*	
			2400x1000x850 H	K 7A/2400*	
	FLEXIBLE SHOWER complete with mixing group and lever tap, to be fixed to the wall and intermediate tap		1000 H	K 1	
			1000 H	K 1HR	
	STAINLESS STEEL WASTE BIN	Basic model	Ø 400x570 H	K 7/1	
		With wheels	Ø 400x570 H	K 7/2	
		With wheels and	Ø 400x570 H	K 7/3	

* Wooden cage +2% minimum + €
Special dimensions for tables upon request
Tables shown in right-to-left version



The latest generation uncompromising Kromo hoodtype dishwashers. These machines are built with fully double-skin hoodtype, designed for being silent and reliable. Beside the standard electronic versions with four programmable cycles, we have developed the PLUS models with guaranteed steady rinse temperature and pressure and two cycles with Hygiene+ superior fea-

tures ($A_0=30$ on the scale of thermo-disinfection according to the norm EN ISO 15883-1). Thanks to these latest technological features, the sturdy Plus versions will promote the almost total elimination of the bacterial load. The customization of our new generation machines has never been so easy!

$A_0=30$
HYGIENE+



HYGIENE+ SYSTEM

The HYGIENE+ models perform long cycles at high temperatures to fulfill high levels of hygiene, now more essential than ever for our health. These special programs comply with $A_0=30$ on the scale of thermo-disinfection according to the norm EN ISO 15883-1. The HYGIENE+ models include 2 special cycles, a short one of 180 seconds and a longer one of 630 seconds, ensuring compliance with high levels of hygiene thanks to high temperatures and long cycles.

FEATURES

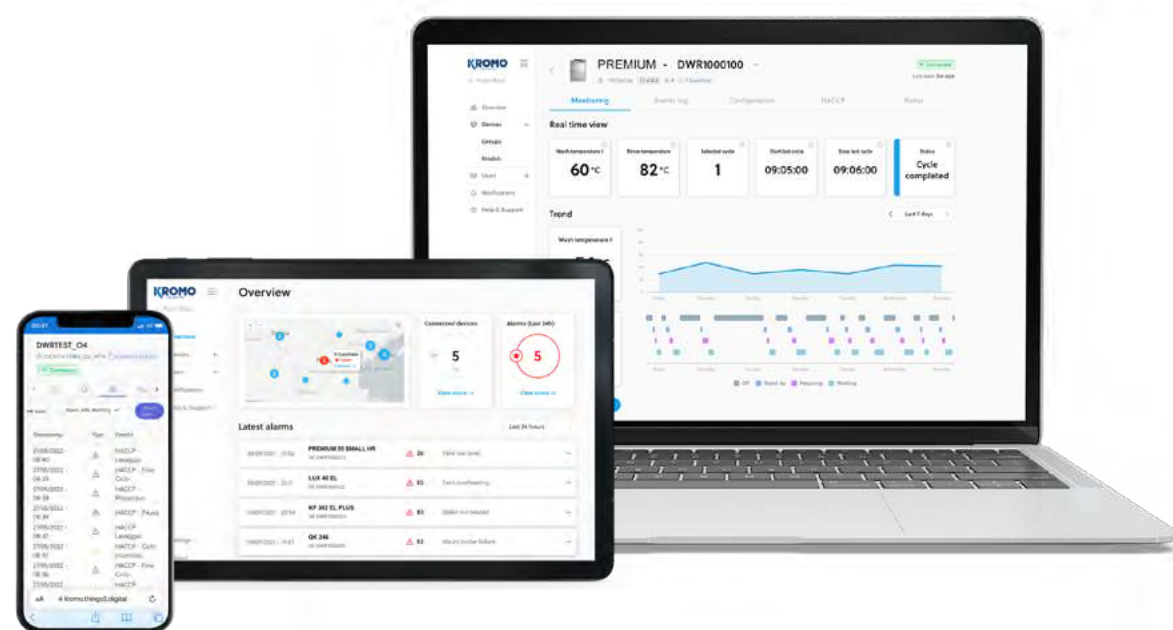
- Easy and intuitive electronic control panel
- Modification of the dosage of detergent and rinse-aid directly on the control panel (Plus versions)
- Remote control panel available on request instead of the standard control panel (Plus versions)
- Four customizable programs
- Hygiene + version (H+ models): two special additional programs complying with $A_0=30$ according to the norm EN ISO 15883-1
- Double skin insulated hood
- Deep tank
- Double tank filters, with dirt collection system and pump filter (improved system for a better filtration of the wash water)
- Self-cleaning vertical pump
- Soft Start wash pump
- Rinse-aid and detergent dispensers included (peristaltic rinse-aid dispenser included on Plus versions)
- Water consumption and working time control system (PLUS versions)
- Easy to access for maintenance
- Anti-drop roof panel
- Easily removable basket support
- Linear or corner layouts
- Self-cleaning cycle
- Built-in peristaltic detergent dispenser and built-in rinse-aid dispenser (peristaltic rinse-aid dispenser included in the Plus versions)
- The Plus system grants a constant rinse temperature and pressure (Plus models)
- Lift: automatic hood lift at the end of cycle
- HR: ENERGY RECOVERY system (HOOD 130 LUX Plus HR)
- CONNECTIVITY remote control compliant with the HACCP norms (on request)
- Predisposition for connection to an external device of reverse osmosis (on request on Plus versions)

CONNECTIVITY 4.0

WHEREVER YOU ARE...

YOUR DISHWASHER, JUST A CLICK AWAY

You will be constantly connected to the machine to monitor the work phases, review any eventual alarm and configure remotely the operating parameters according to your needs. Compliant with HACCP norms.



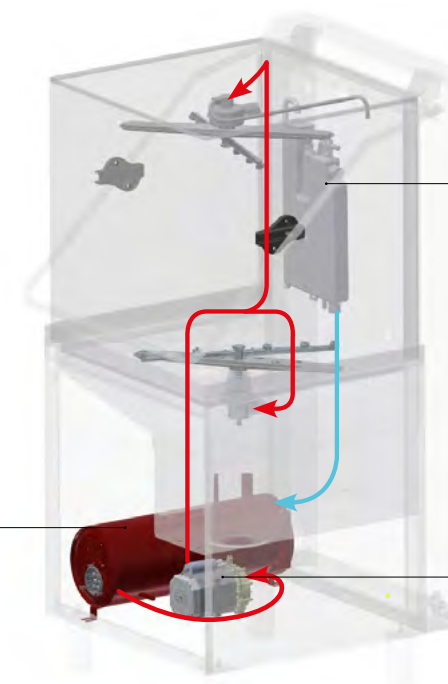
PLUS SYSTEM

GUARANTEED RINSE EVEN WITH LOW PRESSURE OF THE WATER INLET

We have developed an innovative rinsing system at constant temperature, consumption and water pressure, regardless of external conditions.

ATMOSPHERIC BOILER

The water temperature in the boiler remains constant at 85°C throughout the rinse, as the boiler refill only occurs once the rinse cycle is done.



BREAK TANK

The Break Tank system prevents the heated water of the boiler to go back and mix with the fresh water supply.

RINSE PUMP

The water is sucked from the boiler through a rinse pump and is sent to the rinse nozzles. The correct pressure is ensured regardless of the water inlet pressure and temperature.



View all the working parameters and event records, working hours and any problem at any time.



In case of problem, the machine promptly alerts you. The technician can intervene remotely to solve the problem or anticipate the needed parts for an on-site intervention.



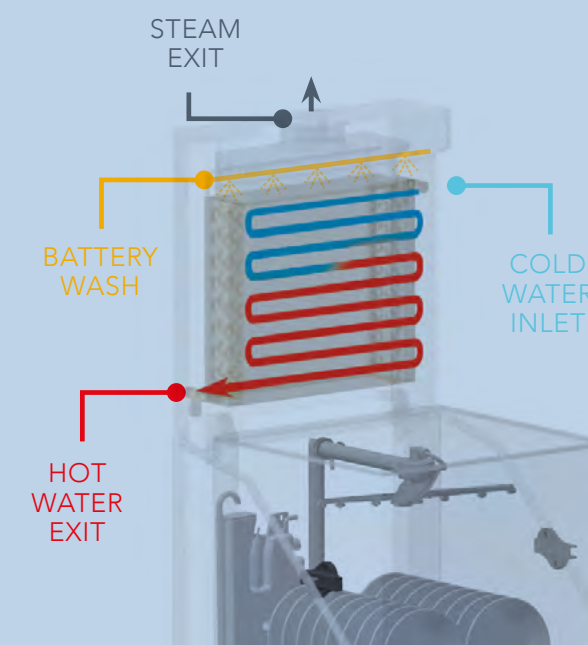
A daily activity report is available with all the events related to the dishwasher in a detailed spreadsheet with HACCP data.



Our Connectivity system is a revolutionary device limiting and facilitating the eventual intervention of a technician who can anticipate the necessary parts to be replaced, saving time and money.

HR - ENERGY RECOVERY

The ENERGY RECOVERY system uses the heat produced by the machine to preheat the inlet cold water (8-15 °C). This is an immediate saving on energy costs. Additionally, an optimal temperature in the dishwashing area is achieved as the air is no more affected by steam and humidity.

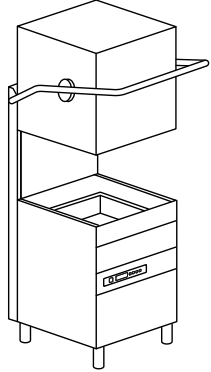
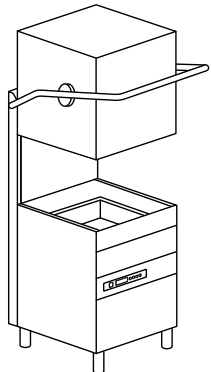
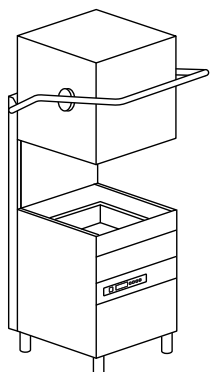
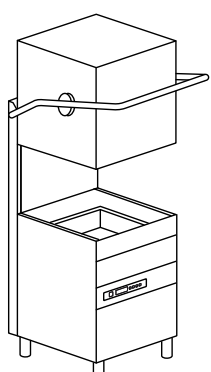


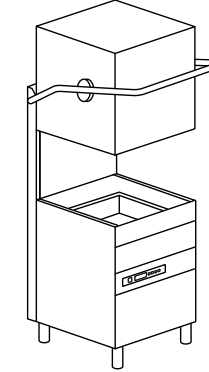
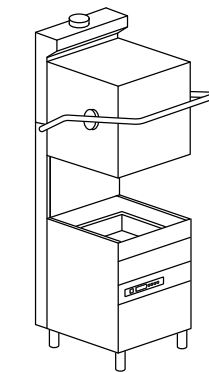
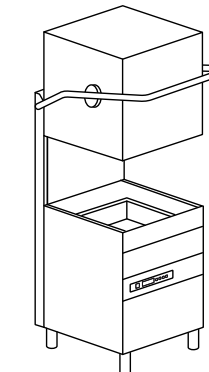
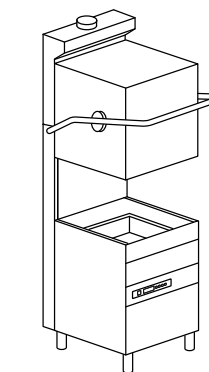
HOOD 130 LUX

LATEST GENERATION
HOOD-TYPE DISHWASHERS

KROMO

HOOD-TYPE
DISHWASHERS

Model	Voltage	Capacity	Poids	Code
HOOD 130 LUX	ELECTRONIC 4 PROGRAMS			
 RACK EQUIPMENT 2 X C40 1 X C44 2 X 15060	400 V 3N ~ 50 Hz 10,5 kW	 500x500	720x735x 1445/1880 H 115 kg  530x325x25 H	HOOD 130 LUX HOOD 130 LUX DA
HOOD 130 LUX H+	ELECTRONIC 4 PROGRAMS			
 RACK EQUIPMENT 2 X C40 1 X C44 2 X 15060	400 V 3N ~ 50 Hz 10,5 kW	 500x500	720x735x 1445/1880 H 115 kg  530x325x25 H	HOOD 130 LUX H+ HOOD 130 LUX DA H+
HOOD 130 LUX LIFT	ELECTRONIC 4 PROGRAMS			
 RACK EQUIPMENT 2 X C40 1 X C44 2 X 15060	400 V 3N ~ 50 Hz 10,5 kW	 500x500	720x735x 1445/1880 H 119 kg  530x325x25 H	HOOD 130 LUX LIFT HOOD 130 LUX LIFT DA
HOOD 130 LUX LIFT H+	ELECTRONIC 4 PROGRAMS			
 RACK EQUIPMENT 2 X C40 1 X C44 2 X 15060	400 V 3N ~ 50 Hz 10,5 kW	 500x500	720x735x 1445/1880 H 119 kg  530x325x25 H	HOOD 130 LUX LIFT H+ HOOD 130 LUX LIFT DA H+

Model	Voltage	Capacity	Poids	Code
HOOD 130 LUX PLUS H+	ELECTRONIC 6 PROGRAMS			
 RACK EQUIPMENT 2 X C40 1 X C44 2 X 15060 A₀=30 HYGIENE +	400 V 3N ~ 50 Hz 10,5 kW	 500x500	720x735x 1445/1880 H 115 kg  530x325x25 H	HOOD 130 LUX PLUS H+ HOOD 130 LUX PLUS DA H+
HOOD 130 LUX PLUS HR H+	ELECTRONIC 6 PROGRAMS - HR: HEAT RECOVERY			
 RACK EQUIPMENT 2 X C40 1 X C44 2 X 15060 A₀=30 HYGIENE +	400 V 3N ~ 50 Hz 10,5 kW	 500x500	720x735x 2095 H 145 kg  530x325x25 H	HOOD 130 LUX PLUS HR H+ HOOD 130 LUX PLUS HR DA H+
HOOD 130 LUX PLUS LIFT H+	ELECTRONIC 6 PROGRAMS			
 RACK EQUIPMENT 2 X C40 1 X C44 2 X 15060 A₀=30 HYGIENE +	400 V 3N ~ 50 Hz 10,5 kW	 500x500	720x735x 1445/1880 H 115 kg  530x325x25 H	HOOD 130 LUX PLUS LIFT H+ HOOD 130 LUX PLUS LIFT DA H+
HOOD 130 LUX PLUS HR LIFT H+	ELECTRONIC 6 PROGRAMS - HR: HEAT RECOVERY			
 RACK EQUIPMENT 2 X C40 1 X C44 2 X 15060 A₀=30 HYGIENE +	400 V 3N ~ 50 Hz 10,5 kW	 500x500	720x735x 2095 H 145 kg  530x325x25 H	HOOD 130 LUX PLUS HR LIFT H+ HOOD 130 LUX PLUS HR LIFT DA H+

OPTIONS

						RO	XP	PS	DDE	DB											
	380-415 V 3N 50 Hz	220-240 V 3 50 Hz	380-415 V 3 50 Hz	440 V 3 60 Hz	60 Hz	Osmosis Connection	Extra Power	Drain Pump	Detergent Dispenser	Rinse-Aid Dispenser	Model	Electric Rinse-Aid Disp.	Break Tank	Wras	DVGW	Connectivity (HACCP)	Booster Pump	Double Skin	Surface Filters Kit	Probes Lack det / rinse aid	Remote control panel
HOOD 130 LUX	●	□	€	€	€	□	€	€	●	●	HOOD 130 LUX	€	€	€	€	€	€	●	●	€	----
HOOD 130 LUX DA	●	□	€	€	€	----	€	€	●	●	HOOD 130 LUX DA	€	----	€	€	€	€	●	●	€	----
HOOD 130 LUX H+	●	□	€	€	€	□	€	€	●	●	HOOD 130 LUX H+	€	€	€	€	€	€	●	●	€	----
HOOD 130 LUX DA H+	●	□	€	€	€	----	€	€	●	●	HOOD 130 LUX DA H+	€	----	€	€	€	€	●	●	€	----
HOOD 130 LUX LIFT	●	□	€	€	€	□	€	€	●	●	HOOD 130 LUX LIFT	€	€	€	€	€	----	●	●	€	----
HOOD 130 LUX LIFT DA	●	□	€	€	€	----	€	€	●	●	HOOD 130 LUX LIFT DA	€	----	€	€	€	----	●	●	€	----
HOOD 130 LUX LIFT H+	●	□	€	€	€	□	€	€	●	●	HOOD 130 LUX LIFT H+	€	€	€	€	€	----	●	●	€	----
HOOD 130 LUX LIFT DA H+	●	□	€	€	€	----	€	€	●	●	HOOD 130 LUX LIFT DA H+	€	----	€	€	€	----	●	●	€	----
HOOD 130 LUX PLUS H+	●	□	€	€	€	□	€	€	●	----	HOOD 130 LUX PLUS H+	●	●	€	€	€	●	●	●	€	€
HOOD 130 LUX PLUS DA H+	●	□	€	€	€	----	€	€	●	----	HOOD 130 LUX PLUS DA H+	●	----	----	----	€	●	●	●	€	€
HOOD 130 LUX PLUS HR H+	●	□	€	€	€	□	€	€	●	----	HOOD 130 LUX PLUS HR H+	●	●	----	----	€	●	●	●	€	€
HOOD 130 LUX PLUS HR DA H+	●	□	€	€	€	----	€	€	●	----	HOOD 130 LUX PLUS HR DA H+	●	----	----	----	€	●	●	●	€	€
HOOD 130 LUX PLUS LIFT H+	●	□	€	€	€	□	€	€	●	----	HOOD 130 LUX PLUS LIFT H+	●	●	€	€	€	●	●	●	€	€
HOOD 130 LUX PLUS LIFT DA H+	●	□	€	€	€	----	€	€	●	----	HOOD 130 LUX PLUS LIFT DA H+	●	----	----	----	€	●	●	●	€	€
HOOD 130 LUX PLUS HR LIFT H+	●	□	€	€	€	□	€	€	●	----	HOOD 130 LUX PLUS HR LIFT H+	●	●	----	----	€	●	●	●	€	€
HOOD 130 LUX PLUS HR LIFT DA H+	●	□	€	€	€	----	€	€	●	----	HOOD 130 LUX PLUS HR LIFT DA H+	●	----	----	----	€	●	●	●	€	€

- Standard
- Upon request
- Not available
- DA

Built-in automatic water softener
- HR

Available in case of osmotic water supply, if the electrical conductivity is higher than 200 microsiemens
- LIFT

Automatic hood lift at the end of the cycle
- PLUS

Rinse with constant temperature and stabilized consumption
- H+

2 cycles of 630 and 180 seconds with high temperatures, reaching up to 70 °C for washing and 90 °C for rinsing
- EAC label upon request
- Water supply 55 °C (not on HR version)

- PS











Not available with 380-415 V 3 50 Hz and 440 V 60 Hz (Plus models)
- XP





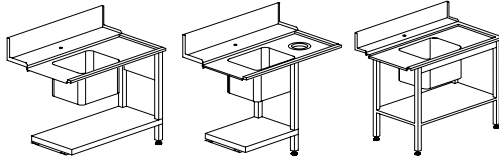
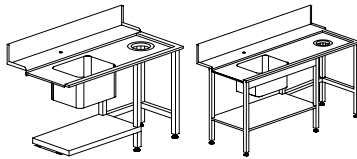




In case of cold water supply for rinse (8-55 °C) and without any heat recovery, the extra power option is mandatory. +3000 W with standard voltage only, for other voltages please contact us. In case of cold water supply for rinse (8-15 °C), we recommend the heat recovery option, if available on the selected Model
- BT-WRAS-DVGW

Booster pump included
- DVGW

Components prescribed by DVGW on request (check option compatibility with the manufacturer)
- CONNECTIVITY

Includes HACCP option. 10-year plan
- Option compatibility to be confirmed by the manufacturer after verification

	Description	Capacity	Dimensions	Code	
	SLOPED GLASS BASKET	Ø 10 max	500x500x200 H	C 26	
	GLASS BASKET WITH GLASS SUPPORT AND ANTI-TIPPING LID		500x500x235 H	C 135	
	LARGE MESH BASKET	For glasses	500x500x105 H	C 44	
	HOLDER FOR GLASS SUPPORT	For glass support (C112-C113-C114)	500x500x50 H	C111	
	GLASS SUPPORT	5x5 Glass Ø 87 mm (C111)	500x500x50 H	C 112	
	GLASS SUPPORT	4x4 Glass Ø 110 mm (C111)	500x500x50 H	C 113	
	GLASS SUPPORT	6x6 Glass Ø 72 mm (C111)	500x500x50 H	C 114	
	PLATE BASKET	18 Plates	500x500x105 H	C 40	
	GASTRONORM TRAYS BASKET	6 pcs max depth 25mm	500x500x105 H	C 43/B	
	CUTLERY BASKET	Standard (2 pcs)	Ø 120x120 H	15060	
	WATER SOFTENER	12 l	Ø 200x500 H	DEP 12	
	AUTOMATIC WATER SOFTENER	12 l (max 800 l)	315x510x685 H	DEP 12-AUT	
	OSMOSIS PLUS MODEL	230 V 50 Hz - 250 W 5° C - 30° C Flow rate 240 l/h Not suitable for machine with integrated water softener Special basket dotation	270x411x451 H 18 Kg	K OS240	

	Description	Capacity	Dimensions	Code	
	SHELF	Only for exit	600x510	K 2ME	
	TABLE		650x510x860 H	K 4/65	
	HOOD CONNECTION SHELF			KIT DUO	
	CORNER TABLE		590x590x860 H	K 2ANG	
	TABLE		700x590x860 H	K 4/70B	
			1200x590x860 H	K 4/120B	
			1200x590x860 H	K 4B	
	Sink 500x400x270 H		1200x730x860 H	K 5	
			1200x730x860 H	K 5F	
			1200x730x860 H	K 55	
	Sink 500x400x270 H		1500x730x860 H	K 8	
			1500x730x860 H	K 8E	
			1800x730x860 H	K 9	
	SHELF		1515x620x660 H	K 7M16*	
	GRADING TABLE WITH RUBBER RING	Waste hole and special dimensions upon request	2315x620x660 H	K 7M24*	
	FLEXIBLE SHOWER complete with mixing group and lever tap, to be fixed to the wall		1600x1000x850 H	K 7A/1600*	
			2400x1000x850 H	K 7A/2400*	
	FLEXIBLE SHOWER complete with mixing group and lever tap, to be fixed to the wall and intermediate tap		1000 H	K 1	
			1000 H	K 1HR	
	STAINLESS STEEL WASTE BIN	Basic model	Ø 400x570 H	K 7/1	
		With wheels	Ø 400x570 H	K 7/2	
		With wheels and	Ø 400x570 H	K 7/3	

* Wooden cage +2% minimum + €
Special dimensions for tables upon request
Tables shown in right-to-left version



We simply combined the highest specs and ultimate new technology to the time-tested name and features. HOOD 140 PREMIUM is our answer to the new high standards of hygiene and cleanliness of the worldwide market, keeping our renowned low operating costs thanks to the OPTIMAL RINSE system. Our HYGIENE+ cycles ($A_0=60$) will guarantee to work safely by keeping top sanitation levels.

The settable additional cycle and the available self-monitoring technology and CONNECTIVITY makes the HOOD 140 PREMIUM the range you have been expecting. An intuitive and interactive electronic panel will lead you through the new functions of your dishwasher. Its self-diagnosis system notifies any anomaly and clearly shows the different steps of the cycle and status of your dishwasher. 6 wash cycles (8 for the Hygiene+ version) and the easy change of voltage make these machines incredibly versatile and easy to install.

$A_0=60$
HYGIENE+



HYGIENE+ SYSTEM

Our HYGIENE + models, with high temperatures and long cycles, ensure compliance with high levels of hygiene, nowadays more essential than ever for our personal health. We designed this range according to strict standards and parameters of thermal disinfection. All our HYGIENE + models obtain the A_0 60 level, reducing pathogenic microorganisms and bacterial load according to the norm EN ISO 15883-1. Two cycles with high temperatures (180 and 630 seconds), reaching up to 75°C for washing and 90°C for rinsing, guarantee a full compliance with the disinfection principles.

FEATURES

- Partial anticipated drain of waste water thanks to the standard drain-pump, waste wash water is partially drained before rinsing. At each cycle, wash water is cleaner, already warm and added with detergent and rinse-aid
- The innovative deep-formed tank with reduced volume allows significant savings on water, energy and chemicals also avoiding water stagnation
- Standard version: six wash cycles with partial drain of the wash water before rinsing
- Hygiene+ version: eight wash cycles, six with partial drain of the wash water before rinsing and two Hygiene+ programs
- Detergent and rinse-aid dosage setting, directly from the control panel
- Self-cleaning vertical pump
- Built-in peristaltic detergent and rinse-aid dispensers
- Double skin insulated hood
- Plus system to grant a constant rinse temperature and pressure
- Water consumption and working time control system (PLUS versions)
- Break Tank system to prevent backflow contaminations in the piping network
- User-friendly multichrome START key
- Electronic control panel with TFT screen
- Language selection and menu personalization
- Self-diagnostic system, for users and service staff
- Self-cleaning cycle
- Soft Start wash pump
- Automatic built-in water softener version available on demand
- Option available remote control panel
- CONNECTIVITY remote control compliant with the HACCP norms (on request)



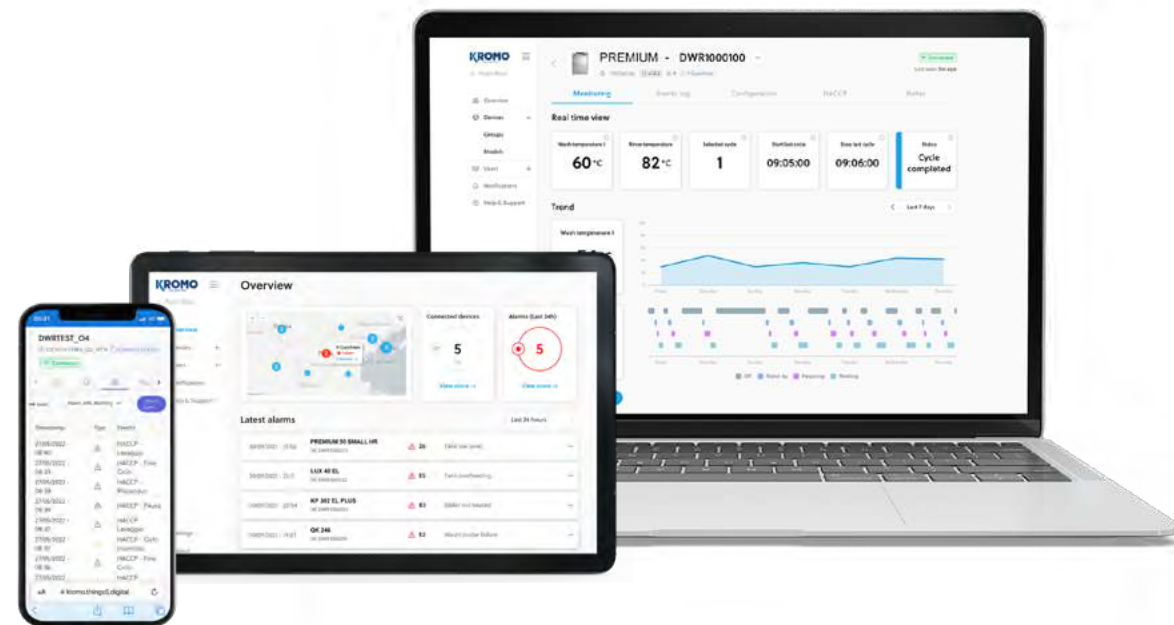
CONNECTIVITY 4.0

WHEREVER YOU ARE...

YOUR DISHWASHER, JUST A CLICK AWAY

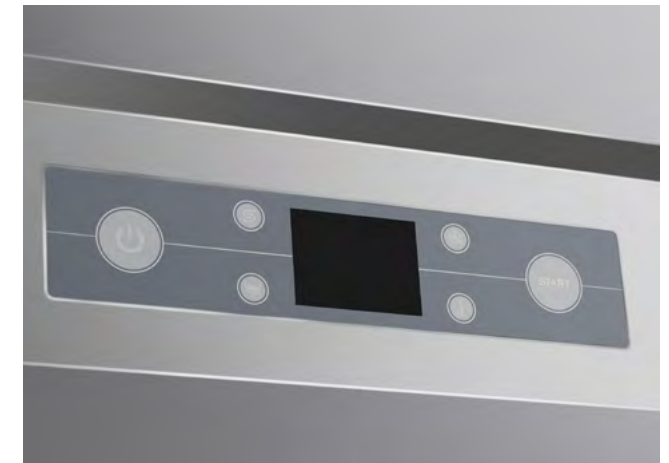
You will be constantly connected to the machine to monitor the work phases, review any eventual alarm and configure remotely the operating parameters according to your needs.

Compliant with HACCP norms.



NEW HIGH-TECH BACKLIT DISPLAY

This new intuitive technology with colored icons, combined with a handy multi-color START, make the machine simple and efficient to use. In addition, the introduction of the new 'customizable cycles' function allows the installer to easily change all parameters related to the wash phase, pause and rinse length and temperatures according to the user's needs. The LED display provides information on the current status of the machine and on ongoing events such as errors, anomalies, temperatures, cycle selection, cycle progression, lack of salt if water softener included and many other indicators depending on the options selected during the configuration phase.



View all the working parameters and event records, working hours and any problem at any time.



In case of problem, the machine promptly alerts you. The technician can intervene remotely to solve the problem or anticipate the needed parts for an on-site intervention.



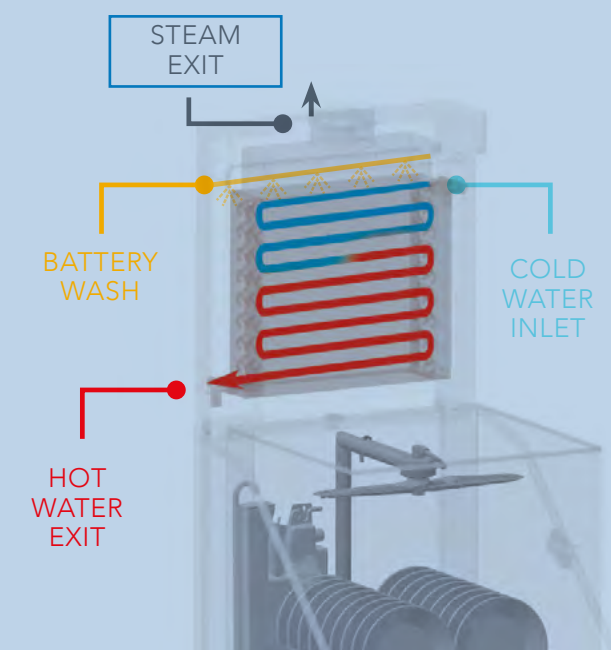
A daily activity report is available with all the events related to the dishwasher in a detailed spreadsheet with HACCP data.



Our Connectivity system is a revolutionary device limiting and facilitating the eventual intervention of a technician who can anticipate the necessary parts to be replaced, saving time and money.

HR - ENERGY RECOVERY

The ENERGY RECOVERY system uses the heat produced by the machine to preheat the inlet cold water (8-15 °C). This is an immediate saving on energy costs. Additionally, an optimal temperature in the dishwashing area is achieved as the air is no more affected by steam and humidity.



HOOD 140 PREMIUM

CONNECTED HOOD-TYPE DISHWASHERS
WITH CLEAN WATER TECHNOLOGY



Model	Voltage	Capacity	Poids	Code	
HOOD 140 PREMIUM					
	ELECTRONIC 6 PROGRAMS				
	Multivoltage:				
	standard				
	400 V 3N 50 Hz				
	ELECTRONIC 6 PROGRAMS				
	Multivoltage:				
	standard				
	400 V 3N 50 Hz				

Model	Voltage	Capacity	Poids	Code	
HOOD 140 PREMIUM H+					
	ELECTRONIC 8 PROGRAMS				
	Multivoltage:				
	standard				
	400 V 3N 50 Hz				
	ELECTRONIC 8 PROGRAMS - HR: HEAT RECOVERY				
	Multivoltage:				
	standard				
	400 V 3N 50 Hz				

X With special basket to be ordered

A₀=60 Special programs complying with A₀ = 60 on the scale of thermo-disinfection according to the norm EN ISO 15883-1. All our Hygiene+ models reach the A₀ 60 level defining the minimum reduction level of pathogenic microorganisms and bacterial load. In addition, our Plus Rinsing System guarantees a perfect rinse with steady temperature and water pressure for optimum hygienic results.

OPTIONS

					CONTROL	RO	XP	PS	DDE	DBE											TS	ST	BT	WRAS	DVGW	CONNECTIVITY	PR	ID	DF	FLOAT
Model	220-240 V 50 Hz	380-415 V 3N 50 Hz	220-240 V 3 50 Hz	60 Hz	Additional remote control panel	Osmosis Connection	Extra Power	Drain Pump	Detergent Dispenser	Peristaltic Rinse-Aid Disp.	Model	Electr. Timer + Thermostop	Soft Start	Break Tank	Wras	DVGW	Connectivity (HACCP)	Rinse Pump	Double Skin	Surface Filters Kit	Probes Lack Det / rinse aid									
HOOD 140 PREMIUM	€	●	€	€	€	□	€	●	●	●	HOOD 140 PREMIUM	●	●	●	€	€	€	●	●	●	€									
HOOD 140 PREMIUM DA	€	●	€	€	€	----	€	●	●	●	HOOD 140 PREMIUM DA	●	●	----	----	----	€	●	●	●	€									
HOOD 140 PREMIUM HR	€	●	€	€	€	□	----	●	●	●	HOOD 140 PREMIUM HR	●	●	●	----	----	€	●	●	●	€									
HOOD 140 PREMIUM HR DA	€	●	€	€	€	----	----	●	●	●	HOOD 140 PREMIUM HR DA	●	●	----	----	----	€	●	●	●	€									
HOOD 140 PREMIUM H+	€	●	€	€	€	□	€	●	●	●	HOOD 140 PREMIUM H+	●	●	●	€	€	€	●	●	●	€									
HOOD 140 PREMIUM DA H+	€	●	€	€	€	----	€	●	●	●	HOOD 140 PREMIUM DA H+	●	●	----	----	----	€	●	●	●	€									
HOOD 140 PREMIUM HR H+	€	●	€	€	€	□	----	●	●	●	HOOD 140 PREMIUM HR H+	●	●	●	----	----	€	●	●	●	€									
HOOD 140 PREMIUM HR DA H+	€	●	€	€	€	----	----	●	●	●	HOOD 140 PREMIUM HR DA H+	●	●	----	----	----	€	●	●	●	€									

- Standard
- Upon request
- Not available
- M

Multivoltage
- DA

Built-in automatic water softener
- HR

Available in case of osmotic water supply, if the electrical conductivity is higher than 200 microsiemens
- H+ (HYGIENE+)

2 cycles of 630 and 180 seconds with high temperatures, reaching up to 75 °C for washing and 90 °C for rinsing
Water supply 55 °C (not on HR version)
- EAC label upon request
- Water supply 55 °C (not on HR version)

- SOFT START











Progressive start of the wash pump
- XP





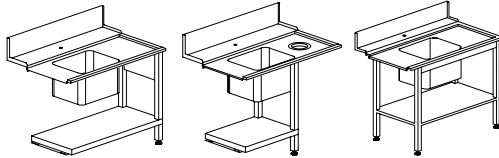





In case of cold water supply for rinse (8-55 °C) and without any heat recovery, the extra power option is mandatory.
+3000 W with standard voltage only, for other voltages please contact us. In case of cold water supply for rinse (8-15 °C). We recommend the heat recovery option, if available on the selected model.
- BT - WRAS - DVGW

Booster pump included.
- DVGW

Components prescribed by DVGW on request (check option compatibility with the manufacturer)
- CONNECTIVITY

Includes HACCP option. 10-year plan
- Option compatibility to be confirmed by the manufacturer after verification.

	Description	Capacity	Dimensions	Code	
	SLOPED GLASS BASKET	Ø 10 max	500x500x200 H	C 26	
	GLASS BASKET WITH GLASS SUPPORT AND ANTI-TIPPING LID		500x500x235 H	C 135	
	LARGE MESH BASKET	For glasses	500x500x105 H	C 44	
	HOLDER FOR GLASS SUPPORT	For glass support (C112-C113-C114)	500x500x50 H	C111	
	GLASS SUPPORT	5x5 Glass Ø 87 mm (C111)	500x500x50 H	C 112	
	GLASS SUPPORT	4x4 Glass Ø 110 mm (C111)	500x500x50 H	C 113	
	GLASS SUPPORT	6x6 Glass Ø 72 mm (C111)	500x500x50 H	C 114	
	PLATE BASKET	18 Plates	500x500x105 H	C 40	
	GASTRONORM TRAYS BASKET	6 pcs max depth 25mm	500x500x105 H	C 43/B	
	CUTLERY BASKET	Standard (2 pcs)	Ø 120x120 H	15060	
	WATER SOFTENER	12 l	Ø 200x500 H	DEP 12	
	AUTOMATIC WATER SOFTENER	12 l (max 800 l)	315x510x685 H	DEP 12-AUT	
	OSMOSIS	230 V 50 Hz - 250 W 5° C - 30° C Flow rate 240 l/h Not suitable for machine with integrated water softener Special basket dotation	270x411x451 H 18 Kg	K OS240	

	Description	Capacity	Dimensions	Code	
	SHELF	Only for exit	600x510	K 2ME	
	TABLE		650x510x860 H	K 4/65	
	HOOD CONNECTION SHELF			KIT DUO	
	CORNER TABLE		590x590x860 H	K 2ANG	
	TABLE		700x590x860 H	K 4/70B	
			1200x590x860 H	K 4/120B	
			1200x590x860 H	K 4B	
	Sink	500x400x270 H	1200x730x860 H	K 5	
			1200x730x860 H	K 5F	
			1200x730x860 H	K 55	
	Sink	500x400x270 H	1500x730x860 H	K 8	
			1500x730x860 H	K 8E	
			1800x730x860 H	K 9	
	SHELF		1515x620x660 H	K 7M16*	
			2315x620x660 H	K 7M24*	
	GRADING TABLE WITH RUBBER RING	Waste hole and special dimensions upon request	1600x1000x850 H	K 7A/1600*	
			2400x1000x850 H	K 7A/2400*	
	FLEXIBLE SHOWER complete with mixing group and lever tap, to be fixed to the wall		1000 H	K 1	
	FLEXIBLE SHOWER complete with mixing group and lever tap, to be fixed to the wall and intermediate tap		1000 H	K 1HR	
	STAINLESS STEEL WASTE BIN	Basic model	Ø 400x570 H	K 7/1	
		With wheels	Ø 400x570 H	K 7/2	
		With wheels and	Ø 400x570 H	K 7/3	

* Wooden cage +2% minimum + €
Special dimensions for tables upon request
Tables shown in right-to-left version



WASH & STORE does the job for you in full comfort, thanks to its ultra-low-sound level and minimal heat loss in the room.

Less handling, less breakages, less repeated job, easy load/unload in full ergonomics. WASH & STORE takes care of it all. Dishes can be used immediately, after the cycles end, or can be left stocked in the machine, as in a shelf.

WASH & STORE can be installed in whatever room, as needing one third of space only, when compared to a traditional dishwashing system.

WASH & STORE consumes much less water i.e. much less chemicals. The electrical consumption is minimal and, thanks to the delayed Start, you can run it far from electrical peak times. This allows the reduction of power supply and, mainly, reduces the electricity bill.



DOUBLE FACE VERSION

SAVES 65% ON OVERALL SPACE

WASH & STORE is available in two versions: a front-load one and a pass-through one -embedded in a wall- the second allowing a connection between two rooms, providing a net separation between loading area and clean area (kitchen) reducing even more the needed space.



FEATURES

- Thermo-resistant independent glass doors
- Double-wall construction with thermo-acoustic insulation
- Chemicals dosing and monitoring station
- Cold-fog drying system
- Standard steam condenser
- Automatic, built-in water softener (not for HI TEMP version)
- AISI 316 wash-tank, insulated, with four independent self-cleaning pumps
- Low-sound level
- Can be installed in whatever room
- Consumes remarkably much less water i.e. much less chemicals
- Minimal electrical consumption and possibility to run the machine far from electrical peak times with the delayed Start, reducing the electricity bill
- Installing is easy and fast
- Due to the innovative drying concept, you can immediately pick and use the dishes after the cycle ends
- With the average costs level in Europe, the investment depreciation time ranges between 9 and 12 months depending on the machine's use
- According to our laboratory tests, we deem a life span between 12 to 15 years if the machine is used properly



FEATURES

WASH & STORE changes color at each cycle phase, displaying the actual working temperature. A water change at each cycle-stage, grants top hygiene levels. Thanks to the 9 wash-cycles available, just any washing needs are matched: from fragile crystal glasses, to heavily soiled pots.

INNOVATIVE WASH ARMS

The WASH & STORE wash arms keep moving on behalf of your own arms, combining the advantages of the tunnel machines and those of the cycle-machines. With WASH & STORE you can divide the wash areas, according to your needs. Due to the innovative drying concept, you can immediately pick and use the dishes after the cycle ends if needed.

INSTALLATION

Installing a WASH & STORE is easy and fast. Just connect the water circuit drainage and the supply cable and the machine is ready on duty.

No steam hoods or vent needed, no floor grids, no water treatment necessary: WASH & STORE is full optional.

Standard applications for the WASH & STORE are: wine-cellars, business restaurants up to 50 covers, family restaurants up to 75 covers, schools, pizzerias, hospital departments, retirement homes, clinics, Police stations and equivalent.

1. Doors opening not interfering with equipment aside the machine
2. Thermo-resistant independant glass doors
3. Double-wall construction with thermo-acoustic insulation
4. Chemicals dosing and monitoring station, in a front load drawer
5. Cold-fog drying system

6. Standard steam condenser
7. Automatic, built-in water softener (no in HI TEMP version)
8. AISI 316 wash-tank, insulated, with 4 independent self-cleaning pumps
9. New system of wash and rinse arms, ensuring improved wash results



-46%
WATER
CONSUMPTION



-38%
INSTALLED
POWER



-82%
CHEMICAL
CONSUMPTION



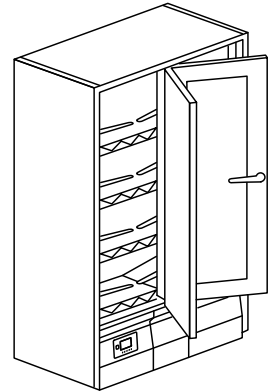
-90%
LABOUR

WASH & STORE

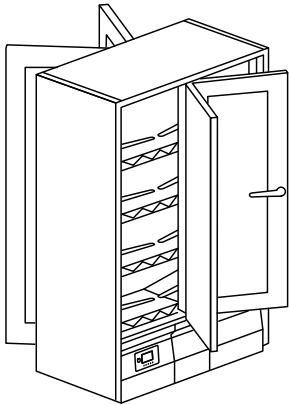
STOCK & WASH
DISHWASHERS

KROMO

STOCK & WASH
DISHWASHERS

Model	Voltage	Capacity	Dimensions	Code
WASH & STORE	ELECTRONIC 9 PROGRAMS			
	400 V 3N ~ 50 Hz 6,5 kW	 220 H - 320 H*	1315x747x2043 H 390 kg or 1315x747x1988 H 390 kg (with wheels)	WASH & STORE
		 Ø 240 - Ø 330*		WASH & STORE HI TEMP
		 530x325x25 H*		

* Upper level only

Model	Voltage	Capacity	Dimensions	Code
WASH & STORE DOUBLE FACE	ELECTRONIC 9 PROGRAMS			
	400 V 3N ~ 50 Hz 6,5 kW	 220 H - 320 H*	1315x810x2043 H 400 kg or 1315x810x1988 H 400 kg (with wheels)	WASH & STORE DOUBLE FACE
		 Ø 240 - Ø 330*		WASH & STORE DOUBLE FACE HI TEMP**
		 530x325x25 H*		

OPTIONS








				DA	SC	PS					DDE	DB	D-SAN	FLOAT	ID	DR-F	R	
Model	380-415 V 3N 50H	220-240 V 3 50 Hz	220-240 V 50 Hz	Water Softener	Steam Condenser	Drain Pump	Model				Detergent Dispenser	Rinse aid Dispenser	Sanitizer Dispenser	Probes product shortage	Double skin doors	Cold fog drying system	Wheels	
WASH & STORE	●	□	□	●	●	€	●	WASH & STORE				●	●	●	●	●	●	€
WASH & STORE HI TEMP*	●	□	□	----	●	€	●	WASH & STORE HI TEMP*				●	●	●	●	●	●	€
WASH & STORE DOUBLE FACE	●	□	□	●	●	€	●	WASH & STORE DOUBLE FACE				●	●	●	●	●	●	€
WASH & STORE DOUBLE FACE HI TEMP*	●	□	□	----	●	€	●	WASH & STORE DOUBLE FACE HI TEMP*				●	●	●	●	●	●	€

- Standard
 - Upon request
 - Not available
- EAC label upon request






WASH & STORE With water softener, water supply max 35°C - Water hardness < 20 °f

WASH & STORE HI TEMP Without water softener, water supply max 65 °C - Max water hardness 5 °f, if higher an external water softener is required

Option compatibility to be confirmed by the manufacturer after verification

	Description	Capacity	Dimensions	Code	
	RACK FOR PLATES AND TRAYS	30 pcs 15 pcs	 210 <Ø>240 250 <Ø>330* max depth 40  530x325x25 H*	590071	
	RACK FOR FLAT DISHES	42 pcs	 250x15 max depth 15	590072	
	RACK FOR PLATES	20 pcs 10 pcs	 210 <Ø>240 250 <Ø>330* max depth 70  530x325x25 H*	590124	
	SAUCER SUPPORT in combination with 590074 or 590075	23 pcs	 Ø<240	590078	
	BOWLS SUPPORT in combination with 590074	8 pcs 20 pcs	 Ø 235 depth 100 Ø 110 depth 50	590128	

*upper level only

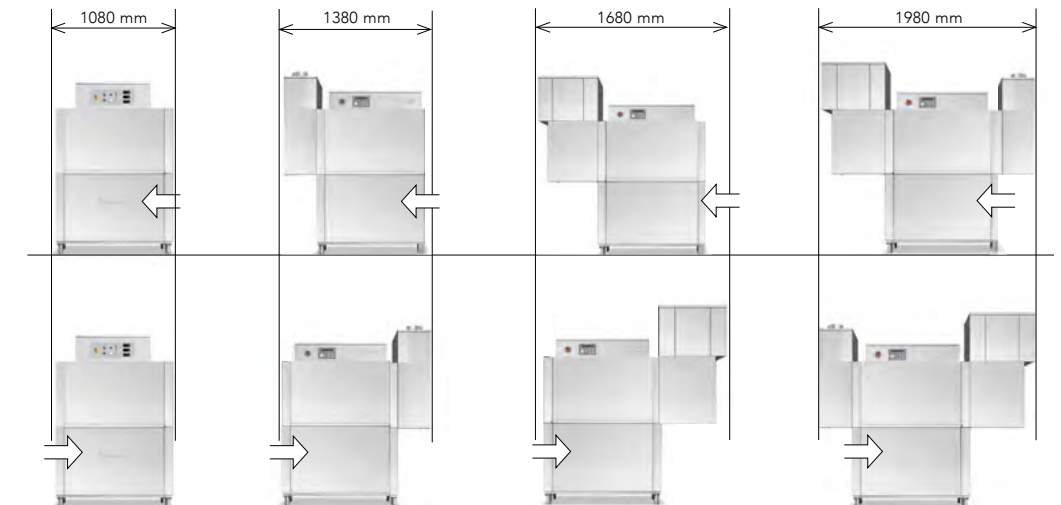
	Description	Capacity	Dimensions	Code	
	RACK FOR MUGS AND LOW GLASSEST	25 pcs	 Ø 100	590074	
	RACK FOR MUGS AND LOW GLASSES	25 pcs	 Ø 100	590075	
	CUPS SUPPORT FOR 590074 / 590075 in combination with 590074	24 pcs	 Ø < 55	590076	
	SUPPORT FOR TALL GLASSES in combination with 590075	8 pcs	 Ø 100	590077	
	CUTLERY SUPPORT in combination with 590074 or 590075	30 pcs		590080	



The RK compact dishwashers line has been designed to satisfy the demand of medium and small restaurants. These machines combine compact



dimensions with high performances. We now introduce the new line with electromechanical panel to enhance the usability.

CUSTOMIZABLE AND REVERSIBLE





FEATURES

- Sloped radial wash tanks to help emptying the tanks
- Self-cleaning vertical wash pumps, protected from electrical overloads
- Traction system with built-in clutch preventing derailment
- AISI 304 stainless steel boilers, fully insulated to reduce thermal losses
- Simple and intuitive touch control panel or electromechanical panel
- S/S wash and rinse arms. These are removable without using any tool
- S/S surface filters on every tank, easily removable without detaching wash arms
- Insulated double skin door, counterbalanced, equipped with anti-drop safety system
- DRIVE speed variator with 3 speeds on the electromechanical versions and 5 speeds on the electronic versions
- Autotimer in order to switch off the rack conveyor motor as well as other machine's options (electronic version)
- Economizers to allow operation only when the rack is detected on that specific area
- Pressure reducer, to stabilize the water pressure and grant an optimal final rinse
- Non-return valve to prevent the water backflow
- Linear or 90° arc drying module (Option)
- Sanitization system which includes the sanitizing product dispensers (Option for electronic version only)
- Heat recovery in case of cold water inlet (8-15 °C) (Option)

Model		Voltage	Capacity	Poids	Code
RK 1010	3 SPEEDS				
IMPROVED 	RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47	400 V 3N ~ 50 Hz 19,1 kW	Ø 450 500x500 66* - 100 racks/h	1080 x 715 1690/1900 H 210 kg GN 1/1 530x325x25 H	RK 1010
RK 1640	3 SPEEDS				
IMPROVED 	RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47	400 V 3N ~ 50 Hz 23,6 kW	Ø 450 500x500 86* - 150 racks/h	1880 x 715 1690/1900 H 270 kg GN 1/1 530x325x25 H	RK 1640

- P** Prewash
- W** Wash
- R** Single rinse
- *** In compliance with DIN SPEC 10534 regulation (contact time)

Model		Voltage	Capacity	Poids	Code
RK 1010 E	ELECTRONIC 5 SPEEDS				
IMPROVED 	RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47	400 V 3N ~ 50 Hz 19,1 kW	Ø 450 500x500 66* - 100 racks/h	1080 x 715 1565/1900 H 210 kg GN 1/1 530x325x25 H	RK 1010 E
RK 1640 E	ELECTRONIC 5 SPEEDS				
IMPROVED 	RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47	400 V 3N ~ 50 Hz 23,6 kW	Ø 450 500x500 86* - 150 racks/h	1880 x 715 1565/1900 H 270 kg GN 1/1 530x325x25 H	RK 1640 E

OPTIONS

				XP	PRE DOS	DDE-GROUP	DOS/S							DRIVE	AUTOTIMER															BT	DVGW	DWI/T	DWI	PI	PAP	SAN	PAP-SAN	DIV	KSC5	KHR5	KDR24	KDRA924	K16AC
Model	220-240 V 3 50 Hz	380-415 V 3N 50 Hz	60 Hz	Extra Power	Kromo disp. connections	Dispensers kit	Dispenser with probe	Rinse econom.	Pressure reducer	High speed	Smart drive	Autotimer	Soft Touch panel		Model	Break Tank	DVGW	Tank insulation	Thermoacoustic insulation	S/S pumps	Booster pump	Sanitization System	Booster Pump Sanitization	Price for division	Steam cond.	Heat recovery	Dryer	Dryer 90° arc	Splash guard														
RK 1010	€	●	+3%	€	●	€	€	●	●	----	----	----	----		RK 1010	----	----	€	€	€	€	----	----	€	€	€	€	€	€	€	€												
RK 1640	€	●	+3%	€	●	€	€	●	●	----	----	----	----		RK 1640	----	----	€	€	€	€	----	----	€	€	€	€	€	€	€	●												
RK 1010 E	€	●	+3%	€	●	€	€	●	●	€	●	●	●		RK 1010 E	€	€	€	€	€	€	€	€	€	€	€	€	€	€	€													
RK 1640 E	€	●	+3%	€	●	€	€	●	●	----	●	●	●		RK 1640 E	€	€	€	€	€	€	€	€	€	€	€	€	€	€	€	●												

- Standard
 - Not available
 - E Electronic panel
 - KDRA924 Available only without KM22 - KM23 on entry
 - KM22 - KM23 Available on entry or exit connections, one per layout
 - DDE-GROUP Both detergent (with probe) and rinse-aid dispensers included
 - DOS/S For detergent dispenser only
 - HIGH SPEED Extra power included. Hot water inlet 55°C
 - AUTOTIMER Functioning only when combined with KDR24, KDRA924, KSC5, KHR5
- Water supply 55 °C - We recommend to install the machine in a well ventilated room, with a properly sized steam exhausting system

Construction according to UL-NSF standards upon request

Costruzione secondo norme UL-NSF su richiesta

EAC label upon request

Option compatibility to be confirmed by the manufacturer after verification
- BT** Booster pump included

DVGW Not available with heat recovery and steam condensera
Components prescribed by DVGW on request (check option compatibility with the manufacturer)

DWI - DWI/T Recommended with KHR5


PI Available with 50 Hz frequency only

SAN Including dosing system for sanitizing product


KHR5 With osmotic water supply and electrical conductivity lower than 200 microsiemens, it is mandatory to install a stainless steel heat exchanger

XP In case of cold water supply for rinse (8-55 °C) and without any heat recovery, the extra power option is mandatory. In case of cold water supply for rinse (8-15 °C), we recommend the heat recovery option


AVAILABLE ARCS:




K21
1300x1300x860 H
90° roller arc with tank




KM22
850x850x885 H
90° mechanized arc
(clockwise/counter-clockwise)




KM23
850x1500x885 H
180° mechanized arc
(clockwise/counter-clockwise)




KDR24
4,5 kW
90° roller arc











KDRA924
4,5 kW
Dryer with mechanized arc 90°
to be used with original Kromo
racks only



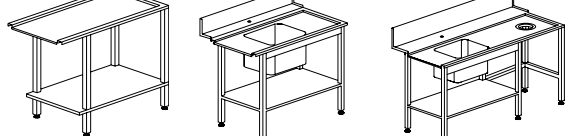








KSC5
Steam condenser
KHR5
Compact heat recovery



K16AC
Splash guard

	Description	Capacity	Dimensions	Code	
	PLATE BASKET	18 Plates	500x500x105 H	C 40	
	GLASS BASKET WITH GLASS SUPPORT AND ANTI-TIPPING LID		500x500x235 H	C 135	
	LARGE MESH BASKET	For glasses	500x500x105 H	C 44	
	HOLDER FOR GLASS SUPPORT	For glass support (C112-C113-C114)	500x500x50 H	C111	
	GLASS SUPPORT	5x5 Glass Ø 87 mm (C111)	500x500x50 H	C 112	
	GLASS SUPPORT	4x4 Glass Ø 110 mm (C111)	500x500x50 H	C 113	
	GLASS SUPPORT	6x6 Glass Ø 72 mm (C111)	500x500x50 H	C 114	
	TRAYS BASKET	6 pcs max depth 25mm	500x500x105 H	C 43	
	CUTLERY BASKET		490x180x140 H	C 47	
	FLEXIBLE SHOWER complete with mixing group and lever tap, to be fixed to the wall		1000 H	K 1	
	FLEXIBLE SHOWER complete with mixing group and lever tap, to be fixed to the wall and intermediate tap		1000 H	K 1HR	

	Description	Capacity	Dimensions	Code	
	SHELF		1515x620x660 H	K 7M16*	
	GRADING TABLE WITH RUBBER RING	Waste hole and special dimensions upon request	2315x620x660 H	K 7M24*	
	MECHANIZED GRADING TABLE With mechanized basket advancement system	1 waste hole	1600x1000x850 H	K 7A/1600*	
		2 waste holes	2400x1000x850 H	K 7A/2400*	
	Sink 500x400x270 H	Standard rubber ring	1200x590x860 H	K 4B	
			1200x730x860 H	K 55	
	ROLLER TABLE + sink, right or left version	Standard rubber ring	1500x730x860 H	K 8	
			1800x730x860 H	K 9	
	LINEAR ROLLER TABLE WITH TANK		1600x730x860 H	K 195	
	LINEAR ROLLER TABLE WITH TANK complete with end microswitch	Option end microswitch	1100x650x860 H	K 19*	
			1600x650x860 H	K 19/B*	
	90° roller arc with tank (exit only with roller table)	Not compatible with same references Not on 180° arcs	2100x650x860 H	K 19/C*	
				K 18	
	ANGLE LOADING TABLE complete with basket pull-through system	To be connected to KM23 only and to dryer on 180°	1100x650x860 H	K 19/1	
			1600x650x860 H	K 19/1A	
	90° mechanized arc clockwise/counter-clockwise, not available at the entry + LC version	Optional connection to prewash tables	1150x650x860 H	K 20/1	
			1650x650x860 H	K 20/1A	
	180° mechanized arc (clockwise/counter-clockwise)	Available on entry or exit connections, one per layout. To be used with original KROMO racks only	1300x1300x860 H	K 21*	
			700x610x820 H	K 25	
			850x850x885 H	KM22*	
			850x1500x885 H	KM23*	

* Wooden cage +2% minimum + € / Special dimensions for tables upon request / Tables shown in right-to-left version
We strongly recommend the presence of a roller table with end microswitch at the exit of our rack conveyor machines for a correct operation



Kromo introduces RK UP with single rinse. This new range of rack conveyor dishwashers, thanks to the new single tank configuration, meets the DIN 10512 norm with a contact of 90 seconds.

Combined with numerous accessories, this new line of RK UP offers personalized solutions for all demands.




FEATURES

STANDARD


- Double-skin, insulated and counterbalanced doors, equipped with anti-drop safety system
- Ergonomic handles
- Thermo barrier system for comfort in use
- Acid proof AISI 316 stainless steel radial wash tanks
- CLEAN+ filters
- Self-cleaning vertical wash pumps, protected from electrical overloads
- Wash arms ALL-IN-1
- CPF System
- Side traction system with built-in clutch
- DRIVE speed variator with 5 speeds
- Use economizer
- Acid proof AISI 316 stainless steel boilers, fully insulated to reduce thermal loss
- Autotimer switching off the rack conveyor motor and all electrical options after a preset lapse of inactivity
- Single rinse R with limited consumptions
- Control panel with IPX5 membrane keyboard

OPTIONS

- Linear and 90°/180° corner drying modules, power 4,5 kW or 9 kW (double skin dryer available for linear models only)
- Steam condenser (KSC10)
- Two models of heat recovery to be chosen according to the type of machine (compact or with integrated heat pump)
- Detergent dispenser with probe or dispensers kit
- Booster pump
- Hydraulic security system Break Tank
- Extra power for the boiler
- Thermal and acoustic insulation
- Stainless steel pumps
- Centralized drain 1-DRAIN
- Delivery in 2 or more parts to facilitate handling
- Machine sanitization also with dedicated booster pump
- Variable speed inverter "drive" with 5 speeds

Model	Voltage	Capacity	Poids	Code
RK 1020 E 5 SPEEDS				
<i>IMPROVED</i>				
	RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47	400 V 3N ~ 50 Hz 19,7 kW	Ø 450 500x500 80*-112 racks/h	1900x805x 1830/2120 H 300 kg GN 1/1 530x325x25 H RK 1020 E

P Prewash
W Wash
R Single rinse

Model	Voltage	Capacity	Poids	Code
RK 1420 E 5 SPEEDS				
<i>IMPROVED</i>				
	RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47	400 V 3N ~ 50 Hz 19,7 kW	Ø 450 500x500 93-144 racks/h 119* racks/h	2100x805x 1830/2120 H 310 kg GN 1/1 530x325x25 H RK 1420 E

* Productivity according to DIN SPEC 10534 (contact time)

OPTIONS

											DRIVE	AUTOTIMER	BT	DVGW	XP	DIV	PI	1-DRAIN	
Model	220-240 V 3 50 Hz	380-415 V 3N 50 Hz	60 Hz	Kromo disp. connections	Dispensers kit	Dispenser with Probe	Saniti-zation	Booster Pump Sani-tiz.	Thermoacou-stic Insulation	Booster pump	Model	Smart drive	Autotimer	Break Tank	DVGW	Extra Power	Price for division	S/S Pumps	Centralized Drain
RK 1020 E	€	●	+3%	●	€	€	€	€	€	€	RK 1020 E	●	●	€	€	€	€	€	●
RK 1420 E	€	●	+3%	●	€	€	€	€	€	€	RK 1420 E	●	●	€	€	€	€	€	●

- Standard
- Not available
- E** Settable electronic panel
- DDE-GROUP** Both detergent with probe and rinse-aid dispensers included
- DOS/S** For detergent dispenser only
- SAN** Including dosing system for sanitizing product
- DWI** Insulation option for the tunnel only, dryer excluded. Shelf dryer can be insulated upon request. Recommended with KHR10 – KHRP40
- DIV** Only splash guards removable
- XP** In case of cold water supply for rinse (8-55 °C) and without any heat recovery, the extra power option is mandatory

- PI** Available with 50 Hz frequency only
- DVGW** Not available with heat recovery or steam condenser
- BT** Booster pump included
- DRIVE** Check voltage compatibility
- With osmotic water supply and electrical conductivity lower than 200 microsiemens, it is mandatory to install a stainless steel heat exchan-ger
- We recommend to install the machine in a well ventilated room, with a properly sized steam exhausting system
- Peak-cut connect upon request
- Warm water supply 55 °C
- EAC label upon request
- Option compatibility to be confirmed by the manufacturer after verification

	KSC10	KHR10	KHRP40	KDR64	KDR69	KDR94		KDR99	KDRA94MC	KDRA99MC	KDRA184MC	KDRA189MC	ID
Model	Steam condenser	Heat recovery	Heat recovery	Dryer + 400 mm 4,5 kW	Dryer + 400 mm / 9 kW	Dryer + 700 mm / 4,5 kW	Model	Dryer + 700 mm / 9 kW	Mechanized dryer 90° arc 4,5 kW	Mechanized dryer 90° arc 9 kW	Mechanized dryer 180° arc 4,5 kW	Mechanized dryer 180° arc 9 kW	Double skin for dryer
RK 1020 E	€	€	€	€	€	€	RK 1020 E	€	€	€	€	€	€
RK 1420 E	€	€	----	€	€	€	RK 1420 E	€	€	€	€	€	€

- Standard
- Not available
- E

Settable electronic panel
- KHRP40

Available with 400 V 3N 50 Hz frequency only
- KHR10 - KHRP40

In case of cold water supply for rinse (8-15 °C), we recommend to install the heat recovery system optional. Extra power included

- ID

Recommended for KDR69 - KDR99. Not available for corner dryers
- KM22 - KM23


Available on entry or exit connections, one per layout
- KDRA184MC - KDRA189MC

Mandatory division
- KDR64 - KDR94 - KDRA94MC - KDRA184MC


Verify feasibility with manufacturer
- KDRA94MC - KDRA99MC - KDRA184MC - KDRA189MC

Available only without KM22 - KM23 on entry
- Option compatibility to be confirmed by the manufacturer after verification


AVAILABLE ARCS:




K21 K21 1300x1300x860 H
90° roller arc with tank




K25 700x610x820 H
Angle loading table complete with basket pull-through system




KM22 850x850x885 H
90° mechanized arc (clockwise/counter-clockwise) to be used with original Kromo racks only




KM23 850x1500x885 H
180° mechanized arc (clockwise/counter-clockwise) to be used with original Kromo racks only




KSC10
Steam condenser




KHR10
Compact Heat recovery




KHRP40
Heat recovery with heat pump




KDR64 4,5 kW Electric
KDR69 9 kW Electric
Dryer



KDR94 4,5 kW Electric
KDR99 9 kW Electric
Dryer



KDRA94MC 4,5 kW Electric
KDRA99MC 9 kW Electric
Dryer with mechanized arc 90° to be used with original Kromo racks only



KDRA184MC 4,5 kW Electric
KDRA189MC 9 kW Electric
Dryer with mechanized arc 180° to be used with original Kromo racks only



Kromo presents the RK UP line of rack conveyor dishwashers with double rinse: a range of models with multiple accessories to offer tailor-made solutions for any customer needs.

Thanks to the efficient pre-rinse and rinse system, we have achieved a radical reduction in water consumption, up to using approximately one liter of water per basket only.

Pre-rinse saves water, rinse-aid and electricity because the water used for rinsing is collected and sent to the pre-rinse arms.. This result, besides respecting the environment, significantly saves chemicals and reduces the need for energy.



CONTROL PANEL

The RK UP control panel with IPX5 membrane keyboard, allows both technicians and users to obtain comprehensive and detailed information on the machine operation. Its display with scrolling text provides data about the current status of the machine, such as boiler and tank temperatures, main alert codes and various programmable settings. The user-friendly control board, combined with the clear set of information provided to the user, make of Kromo display a reliable and effective control device for our machine.






FEATURES





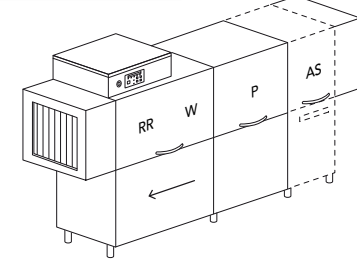
STANDARD

- Electromechanical control panel
- Improved double rinse RR, more effective and with limited consumptions
- Double lateral drive system with incorporated clutch
- DRIVE speed variator with 3 speeds on the electromechanical versions and 5 speeds on the electronic versions

OPTIONS

- Control panel with IPX5 membrane keyboard
- Linear and 90°/180° corner drying modules, power 4,5 kW or 9 kW (double skin dryer available for linear models only)
- Steam condenser (KSC10)
- Three models of heat recovery to be chosen according to the type of machine (compact, standard, or with built-in heat pump)
- Detergent dispenser with probe or dispensers kit
- Booster pump
- Water pressure security system Break Tank
- Extra power for the boiler
- Thermal and acoustic insulation
- Stainless steel pumps
- Centralized drain 1-DRAIN
- Variable speed inverter "drive" with 5 speeds (electronic version).
- Delivery in 2 or more parts to facilitate handling
- Machine sanitization (for electronic versions only) with dedicated booster pump

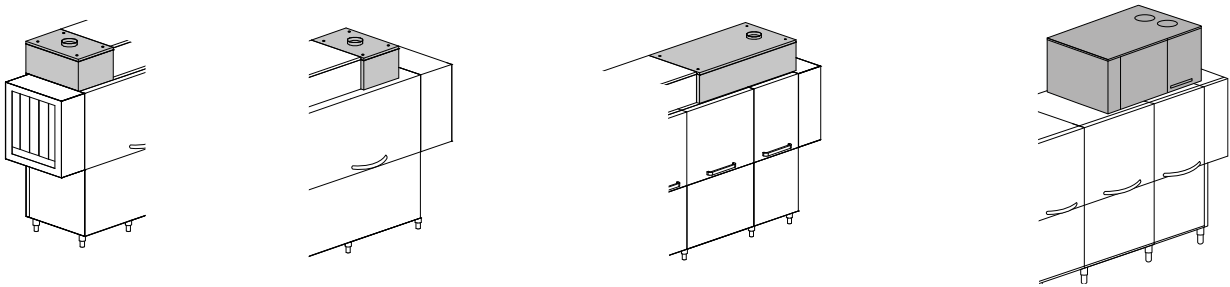
Model	Voltage	Capacity	Poids	Code
RK 1040 3 SPEEDS <i>IMPROVED</i>				
	RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47	400 V 3N ~ 50 Hz 19,90 kW	Ø 450 500x500 80*-112 rack/h	1900x805 1830/2120 H 245 kg AS + 450 mm GN 1/1 530x325x25H RK 1040 RK 1040 AS
RK 1440 3 SPEEDS <i>IMPROVED</i>				
	RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47	400 V 3N ~ 50 Hz 20,60 kW	Ø 450 500x500 93*-144 rack/h	2100x805 1830/2120 H 270 kg GN 1/1 530x325x25H RK 1440
RK 1840 3 SPEEDS <i>IMPROVED</i>				
	RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47	400 V 3N ~ 50 Hz 23,82 kW	Ø 450 500x500 115*-192 rack/h	2500x805 1830/2120 H 355 kg AS + 450 mm GN 1/1 530x325x25H RK 1840 RK 1840 AS
RK 1840-K10 3 SPEEDS - CORNER PREWASH <i>IMPROVED</i>				
	RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47	400 V 3N ~ 50 Hz 23,82 kW	Ø 450 500x500 115-192 rack/h	2225x985 1830/2120 H 355 kg GN 1/1 530x325x25H RK 1840-K10
RK 2440 3 SPEEDS <i>IMPROVED</i>				
	RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47	400 V 3N ~ 50 Hz 28,10 kW	Ø 450 500x500 132*-240 rack/h	2800x805 1830/2120 H 395 kg AS + 450 mm GN 1/1 530x325x25H RK 2440 RK 2440 AS
P Prewash	K10 Corner prewash			
W Wash	AS Automatic shower with filter drawer +450 mm			
RR Pre-rinse + rinse	S Soaking			

Model	Voltage	Capacity	Poids	Code
RK 1040 E 5 SPEEDS <i>IMPROVED</i>				
	RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47	400 V 3N ~ 50 Hz 19,90 k	Ø 450 500x500 80*-112 (with AS 107**) rack/h	1900x805 1830/2120 H 245 kg AS + 450 mm GN 1/1 530x325x25H RK 1040 E RK 1040 E AS
RK 1440 E 5 SPEEDS <i>IMPROVED</i>				
	RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47	400 V 3N ~ 50 Hz 20,60 kW	Ø 450 500x500 93*-144 rack/h	2100x805 1830/2120 H 270 kg GN 1/1 530x325x25H RK 1440 E
RK 1840 E 5 SPEEDS <i>IMPROVED</i>				
	RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47	400 V 3N ~ 50 Hz 23,82 kW	Ø 450 500x500 115*-192 rack/h	2500x805 1830/2120 H 355 kg AS + 450 mm GN 1/1 530x325x25H RK 1840 E RK 1840 E AS
RK 1840 E-K10 5 SPEEDS - CORNER PREWASH <i>IMPROVED</i>				
	RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47	400 V 3N ~ 50 Hz 23,82 kW	Ø 450 500x500 115-192 rack/h	2225x985 1830/2120 H 355 kg GN 1/1 530x325x25H RK 1840 E-K10
RK 2440 E 5 SPEEDS <i>IMPROVED</i>				
	RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47	400 V 3N ~ 50 Hz 28,10 kW	Ø 450 500x500 132*-240 rack/h	2800x805 1830/2120 H 395 kg AS + 450 mm GN 1/1 530x325x25H RK 2440 E RK 2440 E AS
* Productivity according to DIN SPEC 10534 (contact time)				

OPTIONS

PRE DOS DDE-GROUP													DOS/S	SAN	PAP-SAN	KSC10	KHR10	KHR20	KHRP40											
Model	220-240 V 3 50 Hz	380-415 V 3N 50 Hz	60 Hz	Kromo disp. connections	Dispensers kit	Dispenser with Probe	Sanitization	Booster Pump Sanitiz.	Steam condenser	Heat recovery	Heat recovery	Heat recovery	Model	Thermo-acoustic Insulation	Booster pump	Smart drive	Autotimer	Break Tank	DVGW	Extra Power	Price for division	S/S Pumps	Centralized Drain							
RK 1040	€	●	+3%	●	€	€	----	----	€	€	----	----	RK 1040	€	€	●	----	----	----	€	€	€	€							
RK 1040 AS	€	●	+3%	●	€	€	----	----	€	€	----	----	RK 1040 AS	€	€	●	----	----	----	€	€	€	€							
RK 1040 E*	€	●	+3%	●	€	€	€	€	€	€	----	€	RK 1040 E*	€	€	●	●	€	€	€	€	€	€							
RK 1040 E AS	€	●	+3%	●	€	€	€	€	€	€	----	€	RK 1040 E AS	€	€	●	●	€	€	€	€	€	€							
RK 1440	€	●	+3%	●	€	€	----	----	€	€	----	----	RK 1440	€	€	●	----	----	----	€	€	€	€							
RK 1440 E	€	●	+3%	●	€	€	€	€	€	€	----	€	RK 1440 E	€	€	●	●	€	€	€	€	€	€							
RK 1840	€	●	+3%	●	€	€	----	----	€	€	€	----	RK 1840	€	€	●	----	----	----	€	€	€	€							
RK 1840 AS	€	●	+3%	●	€	€	----	----	€	€	€	----	RK 1840 AS	€	€	●	----	----	----	€	€	€	€							
RK 1840 E	€	●	+3%	●	€	€	€	€	€	€	€	----	RK 1840 E	€	€	●	●	€	€	€	€	€	€							
RK 1840 E AS	€	●	+3%	●	€	€	€	●	€	€	€	----	RK 1840 E AS	€	€	●	●	€	€	€	€	€	€							
RK 1840-K10	€	●	+3%	●	€	€	----	----	€	€	----	----	RK 1840-K10	€	€	●	----	----	----	€	€	€	€							
RK 1840 E-K10	€	●	+3%	●	€	€	€	€	€	€	----	----	RK 1840 E-K10	€	€	●	●	€	€	€	€	€	€							
RK 2440	€	●	+3%	●	€	€	----	----	€	€	€	----	RK 2440	€	€	●	----	----	----	€	€	€	€							
RK 2440 AS	€	●	+3%	●	€	€	----	----	€	€	€	----	RK 2440 AS	€	€	●	----	----	----	€	€	€	€							
RK 2440 E*	€	●	+3%	●	€	€	€	€	€	€	€	----	RK 2440 E*	€	€	●	●	€	€	€	€	€	€							
RK 2440 E AS	€	●	+3%	●	€	€	€	●	€	€	€	----	RK 2440 E AS	€	€	●	●	€	€	€	€	€	€							

- Standard
- Not available
- E Settable electronic panel
- KHRP40 Available with 400 V 3N 50 Hz frequency only
- KHR10 - KHR20 - KHRP40 In case of cold water supply for rinse (8-15 °C), we recommend to install the heat recovery system optional. Extra power included



KSC10 Steam condenser	KHR10 Compact Heat recovery	KHR20 Heat recovery	KHRP40 Heat recovery with heat pump
---------------------------------	---------------------------------------	-------------------------------	---

- + Not available for K10 version if the machine is next to the wall
- * Construction according to UL-NSF standards upon request
- DDE-GROUP Both detergent and rinse-aid dispensers included (with probe)
- DOS/S For detergent dispenser only
- SAN Including dosing system for sanitizing product
- DWI Insulation option for the tunnel only, dryer excluded. Shelf dryer can be insulated upon request. Recommended with KHR10 – KHR20 – KHRP40
- DRIVE Check voltage compatibility
- BT Booster pump included
- DIV For models RK 1040, RK 1040 E, only splash guards removable
- PI Available with 50 Hz frequency only. Not available for AS module
- DVGW Not available with heat recovery or steam condenser
Components prescribed by DVGW on request (check option compatibility with the manufacturer)
- XP In case of cold water supply for rinse (8-55 °C) and without any heat recovery, the extra power option is mandatory











With osmotic water supply and electrical conductivity lower than 200 microsiemens, it is mandatory to install a stainless steel heat exchanger



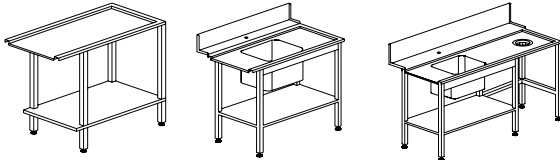





Peak-cut connect upon request

Warm water supply 55 °C

We recommend to install the machine in a well ventilated room, with a properly sized steam exhausting system

Option compatibility to be confirmed by the manufacturer after verification

	Description	Capacity	Dimensions	Code	€
	PLATE BASKET	18 Plates	500x500x105 H	C 40	
	GLASS BASKET WITH GLASS SUPPORT AND ANTI-TIPPING LID		500x500x235 H	C 135	
	LARGE MESH BASKET	For glasses	500x500x105 H	C 44	
	HOLDER FOR GLASS SUPPORT	For glass support (C112-C113-C114)	500x500x50 H	C111	
	GLASS SUPPORT	5x5 Glass Ø 87 mm (C111)	500x500x50 H	C 112	
	GLASS SUPPORT	4x4 Glass Ø 110 mm (C111)	500x500x50 H	C 113	
	GLASS SUPPORT	6x6 Glass Ø 72 mm (C111)	500x500x50 H	C 114	
	TRAYS BASKET	8 pcs max depth 25mm	500x500x105 H	C 43	
	CUTLERY BASKET		490x180x140 H	C 47	
	FLEXIBLE SHOWER complete with mixing group and lever tap, to be fixed to the wall		1000 H	K 1	
	FLEXIBLE SHOWER complete with mixing group and lever tap, to be fixed to the wall and intermediate tap		1000 H	K 1HR	

	Description	Capacity	Dimensions	Code	€
	SHELF		1515x620x660 H	K 7M16*	
	GRADING TABLE WITH RUBBER RING	Waste hole and special dimensions upon request	2315x620x660 H 1600x1000x850 H 2400x1000x850 H	K 7M24* K 7A/1600* K 7A/2400*	
	MECHANIZED GRADING TABLE With mechanized basket advancement system	1 waste hole	1800x1240 1525 H	K M7/1800*	
		2 waste holes	2400x1240 1525 H	K M7/2400*	
	Sink 500x400x270 H	Standard rubber ring Standard rubber ring	1200x590x860 H	K 4B	
			1200x730x860 H	K 55	
	ROLLER TABLE + sink, right or left version Sink 500x400x270 H		1500x730x860 H	K 8	
			1800x730x860 H	K 9	
	LINEAR ROLLER TABLE WITH TANK		1100x650x860 H 1600x650x860 H 2100x650x860 H	K 19* K 19/B* K 19/C*	
	LINEAR ROLLER TABLE WITH TANK complete with end microswitch	Option end microswitch		K 18	
		Not compatible with same references Not on 180° arcs Accrochable seulement avec KM23 et avec virage 180°	1100x650x860 H 1600x650x860 H 1150x650x860 H 1650x650x860 H	K 19/1 K 19/1A K 20/1 K 20/1A	
	90° roller arc with tank (exit only with roller table)		1300x1300x860 H	K 21*	
	ANGLE LOADING TABLE complete with basket pull-through system	Option connection to prewash tables	700x610x820 H	K 25	
	90° mechanized arc clockwise/counter-clockwise, not available at the entry with K10 version	Available on entry or exit connections, one per layout. To be used with original KROMO racks only	850x850x885 H	KM22*	
	180° mechanized arc (clockwise/counter-clockwise)		850x1500x885 H	KM23*	

* Wooden cage +2% minimum + € / Special dimensions for tables upon request / Tables shown in right-to-left version
We strongly recommend the presence of a roller table with end microswitch at the exit of our rack conveyor machines for a correct operation



The Kromo rack conveyor dishwashers are the ideal answer for demanding customers such as restaurants, canteens, schools, hospitals, hotel of any size, cruise-liners, caterers and airports. Models equipped with reinforced double rinse on an independent module. Wash and rinse areas are completely separated, this avoids any interference between detergent and rinse aid, increasing its effectiveness and achieving a consequent reduction in consumption.

The wider distance between the pre-rinse arms also avoids the contamination in the rinse zone. Thanks to the renewed double rinsing system, we achieved a radical reduction of water consumption down to less than one liter per basket: far below the best market standards. This result, showing the green heart of the RK LUX line, allows significant savings on chemicals and electricity bills.



FEATURES

STANDARD

- SMART DRIVE advancement system with 5 speeds
- IPX5 electronic board
- TFT 5.7" display and soft touch keyboard
- Frequently used keys shortcut and menu language setting
- Constant monitoring of key operating parameters with integrated HACCP interface
- Alarms and events report
- ECO-DET Detergent economizer
- Reinforced double rinse 2R+, more effective and with limited consumptions
- 1-DRAIN Centralized drain
- Preset configuration to install our Kromo dispensers
- Water, energy consumptions and working time readout
- Preset maintenance reminder
- Possible working modes for dryer unit: all off, only fan or total power + fan (4,5 kW or 9 kW, maximum power according to the model)

OPTIONS

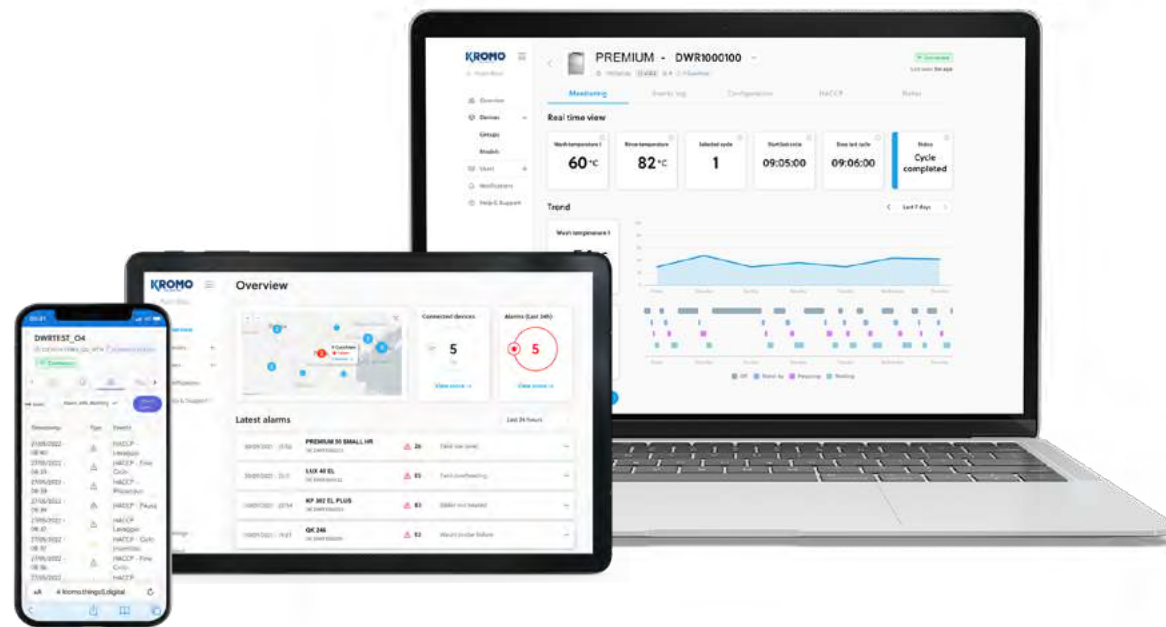
- Linear and 90°/180° corner drying modules, power 4,5 kW or 9 kW (double skin door available only for linear models)
- and steam dryer available
- Steam condenser (KSC10) or 3 heat recovery systems, to be chosen according to the type of machine (XP included)
- Detergent dispenser with probe or dispensers kit
- Booster pump
- Hydraulic security system Break Tank
- Extra power for boiler
- Thermal and acoustic insulation
- Insulated tanks
- Stainless steel pumps
- Machine sanitization (with dedicated booster pump upon request)
- Delivery in 2 or more parts for easy handling
- CONNECTIVITY remote control compliant with the HACCP norms

CONNECTIVITY 4.0

WHEREVER YOU ARE...

YOUR DISHWASHER, JUST A CLICK AWAY

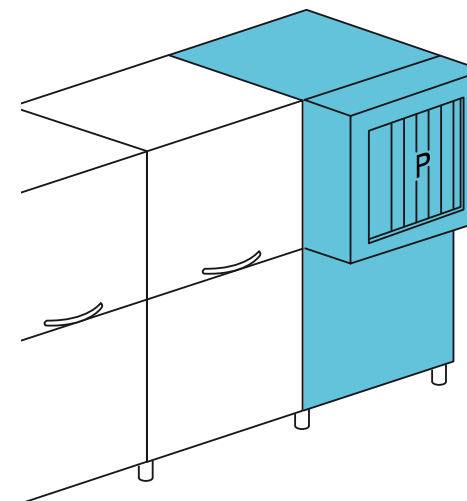
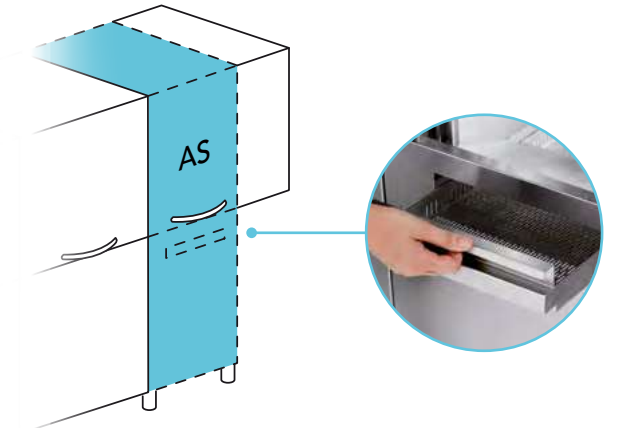
You will be constantly connected to the machine to monitor the work phases, review any eventual alarm and configure remotely the operating parameters according to your needs. Compliant with HACCP norms. Compliant with HACCP norms.



AS OPTION

AUTOMATIC SHOWER
WITH FILTER DRAWER EASY+

Time and energy savings are increased thanks to AS and EASY+, a combined and specific filtering device. Dishes will only need a superficial manual clearing and the automatic shower of the AS module will do a pre-treatment action. (Not available with an installed K10 option).



K10 OPTION

90° CORNER PRE-WASH

The design of our 90° corner pre-wash ensures the best solution taking up the minimal amount of space. Smaller dimensions, same productivity (Available on selected models and without AS option).



View all the working parameters and event records, working hours and any problem at any time.



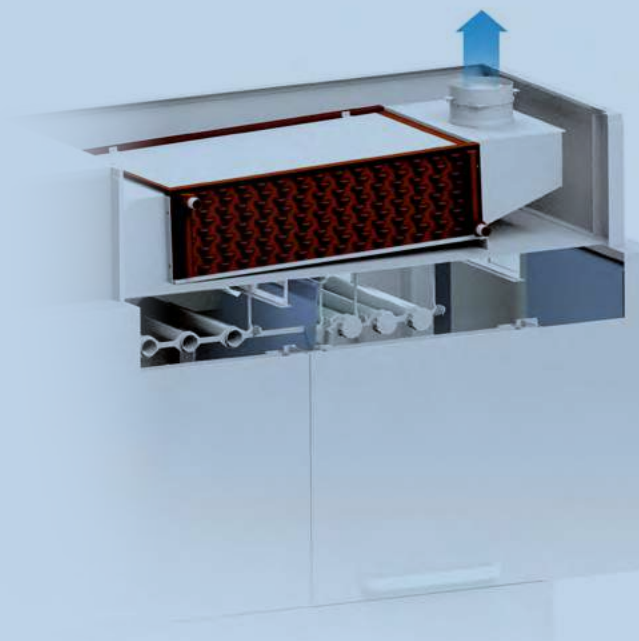
In case of problem, the machine promptly alerts you. The technician can intervene remotely to solve the problem or anticipate the needed parts for an on-site intervention.



A daily activity report is available with all the events related to the dishwasher in a detailed spreadsheet with HACCP data.




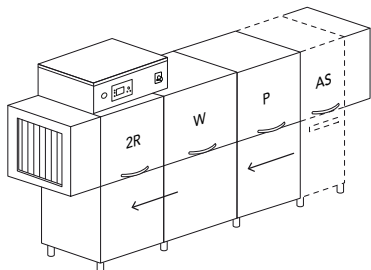

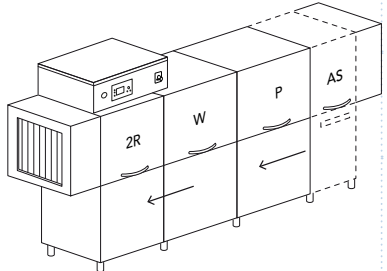
Our Connectivity system is a revolutionary device limiting and facilitating the eventual intervention of a technician who can anticipate the necessary parts to be replaced, saving time and money.

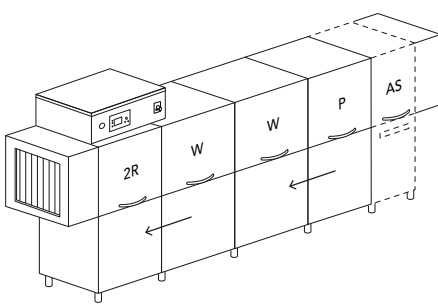
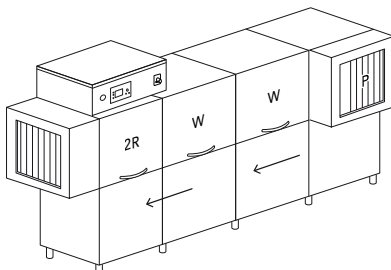
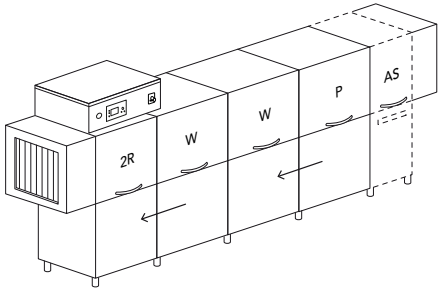


HEAT RECOVERY

The heat recovery system allows to supply the machine with cold water*, ensuring at the same time significant savings in terms of energy consumptions. The steam produced by the machine in operation (otherwise dispersed in the working environment) is aspirated and condensed in the heat exchanger (air-water). The heat produced through this process is transferred to the inlet water, bringing it to a temperature of approximately 45 °C and reducing energy consumptions.

*inlet water temperature between 8 °C and 15 °C

Model		Voltage	Capacity	Dimensions	Code
RK 2460	5 SPEEDS				
	RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47	400 V 3N ~ 50 Hz 20,68 kW	 Ø 450	2100x805 1830/2120 H 305 kg	RK 2460
				AS + 450 mm	RK 2460 AS
		400 V 3N ~ 50 Hz 2,68 kW 30 kg/h	 500x500	 530x325x25H	RK 2460 V
			100*/250 rack/h		RK 2460 AS V
RK 2960	5 SPEEDS				
	RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47	400 V 3N ~ 50 Hz 21,58 kW	 Ø 450	2700x805 1830/2120 H 400 kg	RK 2960
				AS + 450 mm	RK 2960 AS
		400 V 3N ~ 50 Hz 3,58 kW 30 kg/h	 500x500	 530x325x25H	RK 2960 V
			135*/300 rack/h		RK 2960 AS V
RK 2960-K10	5 SPEEDS AND CORNER PREWASH				
	RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47	400 V 3N ~ 50 Hz 21,58 kW	 Ø 450	2425x985 1830/2120 H 400 kg	RK 2960-K10
				AS + 450 mm	
		400 V 3N ~ 50 Hz 3,58 kW 30 kg/h	 500x500	 530x325x25H	RK 2960-K10 V
			135/300 rack/h		
RK 3260	5 SPEEDS				
	RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47	400 V 3N ~ 50 Hz 25,86 kW	 Ø 450	3000x805 1830/2120 H 435 kg	RK 3260
				AS + 450 mm	RK 3260 AS
		400 V 3N ~ 50 Hz 4,86 kW 30 kg/h	 500x500	 530x325x25H	RK 3260 V
			150*/330 rack/h		RK 3260 AS V

Model		Voltage	Capacity	Dimensions	Code
RK 3560	5 SPEEDS				
	RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47	400 V 3N ~ 50 Hz 37,26 kW	 Ø 450	3600x805 1830/2120 H 520 kg	RK 3560
				AS + 450 mm	RK 3560 AS
		400 V 3N ~ 50 Hz 5,76 kW 52 kg/h	 500x500	 530x325x25H	RK 3560 V
			190*/360 rack/h		RK 3560 AS V
RK 3560-K10	5 SPEEDS AND CORNER PREWASH				
	RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47	400 V 3N ~ 50 Hz 37,26 kW	 Ø 450	3325x985 1830/2120 H 520 kg	RK 3560-K10
				AS + 450 mm	
		400 V 3N ~ 50 Hz 5,76 kW 52 kg/h	 500x500	 530x325x25H	RK 3560-K10 V
			190*/360 rack/h		
RK 3960	5 SPEEDS				
	RACK EQUIPMENT 1 X C40 1 X C43 1 X C44 1 X C47	400 V 3N ~ 50 Hz 40,04 kW	 Ø 450	3900x805 1830/2120 H 560 kg	RK 3960
				AS + 450 mm	RK 3960 AS
		400 V 3N ~ 50 Hz 7,04 kW 55 kg/h	 500x500	 530x325x25H	RK 3960 V
			210*/400 rack/h		RK 3960 AS V

- V** Steam supply
P Prewash
W Wash
2R Pre-rinse + rinse on module
K10 Corner prewash
AS Automatic shower with filter drawer +450 mm
***** Productivity according to DIN SPEC 10534 (contact time)
- EAC label upon request
Option compatibility to be confirmed by the manufacturer after verification

OPTIONS

				PRE DOS	DDE-GROUP	DOS/S	SAN	PAP-SAN	DWI / T	DWI													
Model	220-240 V 3 50 Hz	380-415 V 3N 50 Hz	60 Hz	Kromo disp. connections	Dispensers kit	Dispenser with probe	Sanitiz- ation	Booster pump Sanitization	Tanks insulation	Thermo- acoustic Insulation	Model	Rinse Booster pump	Break Tank	DVGW	Extra Power	Price per division	CONNECTIVITY (HACCP)	S/S pumps	Automa- tized Drain	Centra- lized Drain	Auto- timer	Detergent economi- zer	Smart drive
RK 2460	€	●	+ 3%	●	€	€	€	€	€	€	RK 2460	€	€	€	€	€	€	€	€	●	●	●	●
RK 2460 V	€	●	+ 3%	●	€	€	€	€	€	€	RK 2460 V	€	€	€	€	€	€	€	----	●	●	●	●
RK 2460 AS	€	●	+ 3%	●	€	€	€	€	€	€	RK 2460 AS	€	€	€	€	€	€	€	€	●	●	●	●
RK 2460 AS V	€	●	+ 3%	●	€	€	€	€	€	€	RK 2460 AS V	€	€	€	€	€	€	€	----	●	●	●	●
RK 2960	€	●	+ 3%	●	€	€	€	€	€	€	RK 2960	€	€	€	€	€	€	€	€	●	●	●	●
RK 2960 V	€	●	+ 3%	●	€	€	€	€	€	€	RK 2960 V	€	€	€	€	€	€	€	----	●	●	●	●
RK 2960 AS	€	●	+ 3%	●	€	€	€	●	€	€	RK 2960 AS	€	€	€	€	€	€	€	€	●	●	●	●
RK 2960 AS V	€	●	+ 3%	●	€	€	€	●	€	€	RK 2960 AS V	€	€	€	€	€	€	€	----	●	●	●	●
RK 2960-K10	€	●	+ 3%	●	€	€	€	€	€	€	RK 2960-K10	€	€	€	€	€	€	€	€	●	●	●	●
RK 2960-K10 V	€	●	+ 3%	●	€	€	€	€	€	€	RK 2960-K10 V	€	€	€	€	€	€	€	----	●	●	●	●
RK 3260	€	●	+ 3%	●	€	€	€	€	€	€	RK 3260	€	€	€	€	€	€	€	€	●	●	●	●
RK 3260 V	€	●	+ 3%	●	€	€	€	€	€	€	RK 3260 V	€	€	€	€	€	€	€	----	●	●	●	●
RK 3260 AS	€	●	+ 3%	●	€	€	€	●	€	€	RK 3260 AS	€	€	€	€	€	€	€	€	●	●	●	●
RK 3260 AS V	€	●	+ 3%	●	€	€	€	●	€	€	RK 3260 AS V	€	€	€	€	€	€	€	----	●	●	●	●
RK 3560	€	●	+ 3%	●	€	€	€	●	€	€	RK 3560	€	€	€	----	€	€	€	€	●	●	●	●
RK 3560 V	€	●	+ 3%	●	€	€	€	●	€	€	RK 3560 V	€	€	€	----	€	€	€	----	●	●	●	●
RK 3560 AS	€	●	+ 3%	●	€	€	€	●	€	€	RK 3560 AS	€	€	€	----	€	€	€	€	●	●	●	●
RK 3560 AS V	€	●	+ 3%	●	€	€	€	●	€	€	RK 3560 AS V	€	€	€	----	€	€	€	----	●	●	●	●
RK 3560-K10	€	●	+ 3%	●	€	€	€	●	€	€	RK 3560-K10	€	€	€	----	€	€	€	€	●	●	●	●
RK 3560-K10 V	€	●	+ 3%	●	€	€	€	●	€	€	RK 3560-K10 V	€	€	€	----	€	€	€	----	●	●	●	●
RK 3960	€	●	+ 3%	●	€	€	€	●	€	€	RK 3960	€	€	€	----	€	€	€	€	●	●	●	●
RK 3960 V	€	●	+ 3%	●	€	€	€	●	€	€	RK 3960 V	€	€	€	----	€	€	€	----	●	●	●	●
RK 3960 AS	€	●	+ 3%	●	€	€	€	●	€	€	RK 3960 AS	€	€	€	----	€	€	€	€	●	●	●	●
RK 3960 AS V	€	●	+ 3%	●	€	€	€	●	€	€	RK 3960 AS V	€	€	€	----	€	€	€	----	●	●	●	●

- Standard
- Not available
- DDE-GROUP Both detergent (with probe) and rinse-aid dispenser included
- DOS/S For detergent dispenser only
- SAN Including dosing system for sanitizing product
- DWI Insulation option for the tunnel only, dryer excluded.
Shelf dryer can be insulated upon request
- DWI - DWI/T Recommended with KHR10 – KHR20 – KHRP40
- DIV Compulsory for machines > 4,5m length
- XP In case of cold water supply for rinse (8-55 °C) and without any heat recovery, the extra power option is mandatory

- CONNECTIVITY Includes HACCP option. 10-year plan
- PI Available with 50 Hz frequency only. Not available for AS module
- DVGW Not available with heat recovery and steam condenser.
Components prescribed by DVGW on request (check option compatibility with the manufacturer).
- BT Booster pump included
- With osmotic water supply and electrical conductivity lower than 200 microsiemens, it is mandatory to install a stainless steel heat exchange
- Warm water supply 55 °C
- We recommend to install the machine in a well-ventilated room, with a properly sized steam exhausting system
- Standard hints for scheduled maintenance and counters (working hours - water - energy)
- Peak-cut connect upon request

OPTIONS

	KSC10	KHR10	KHR20	KHRP40	KDR64	KDR69	KDR6V	KDR94	KDR99	KDR9V		KDRA94MT	KDRA99MT	KDRA9VMT	KDRA184MT	KDRA189MT	KDRA18VMT	ID
Model	Steam Condenser	Heat Recovery	Heat Recovery	Heat Recovery	Dryer + 400 mm / 4,5 kW	Dryer + 400 mm / 9 kW	Steam Dryer + 400 mm	Dryer + 700 mm / 4,5 kW	Dryer + 700 mm / 9 kW	Steam Dryer + 700 mm	Model	Motorized dryer 90° arc 4,5 kW	Motorized dryer 90° arc 9 kW	Motorized steam dryer 90°arc	Motorized dryer 180° arc 4,5 kW	Motorized dryer 180° arc 9 kW	Motorized steam dryer 180° arc	Double skin Dryer
RK 2460 - RK 2460 AS	€	€	----	€	€	€	----	€	€	----	RK 2460 - RK 2460 AS	€	€	----	€	€	----	€
RK 2460 V - RK 2460 AS V	€	€	----	€	----	----	€	----	----	€	RK 2460 V - RK 2460 AS V	----	----	€	----	----	€	€
RK 2960 - RK 2960 AS	€	€	€	€	€	€	----	€	€	----	RK 2960 - RK 2960 AS	€	€	----	€	€	----	€
RK 2960 V - RK 2960 AS V	€	€	€	€	----	----	€	----	----	€	RK 2960 V - RK 2960 AS V	----	----	€	----	----	€	€
RK 2960-K10	€	€	€	€+	€	€	----	€	€	----	RK 2960-K10	€	€	----	€	€	----	€
RK 2960-K10 V	€	€	€	€+	----	----	€	----	----	€	RK 2960-K10 V	----	----	€	----	----	€	€
RK 3260 - RK 3260 AS	€	€	€	€	€	€	----	€	€	----	RK 3260 - RK 3260 AS	€	€	----	€	€	----	€
RK 3260 V - RK 3260 AS V	€	€	€	€	----	----	€	----	----	€	RK 3260 V - RK 3260 AS V	----	----	€	----	----	€	€
RK 3560 - RK 3560 AS	€	€	€	€	€	€	----	€	€	----	RK 3560 - RK 3560 AS	€	€	----	€	€	----	€
RK 3560 V - RK 3560 AS V	€	€	€	€	----	----	€	----	----	€	RK 3560 V - RK 3560 AS V	----	----	€	----	----	€	€
RK 3560-K10	€	€	€	€+	€	€	----	€	€	----	RK 3560-K10	€	€	----	€	€	----	€
RK 3560-K10 V	€	€	€	€+	----	----	€	----	----	€	RK 3560-K10 V	----	----	€	----	----	€	€
RK 3960 - RK 3960 AS	€	€	€	€	€	€	----	€	€	----	RK 3960 - RK 3960 AS	€	€	----	€	€	----	€
RK 3960 V - RK 3960 AS V	€	€	€	€	----	----	€	----	----	€	RK 3960 V - RK 3960 AS V	----	----	€	----	----	€	€

- +

Not available for K10 version if the machine is next to the wall
- ID

Not available for corner dryers, recommended for KDR69 - KDR6V - KDR99 - KDR9V
- KHRP40

Available with 400 V 3N 50 Hz frequency only
- KHR20

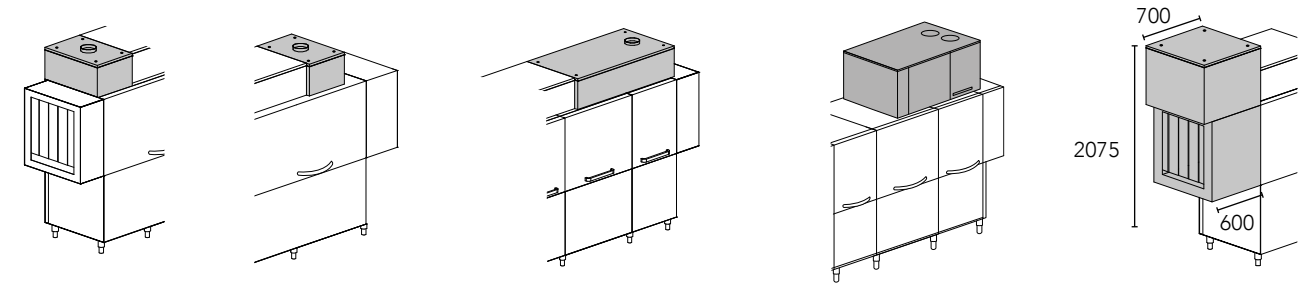
Either KHR10, KHRP40.
For the model RK 2960-K10 +50 mm length with installed KHR20 and dryer
- KDRA184MT - KDRA189MT

Mandatory division
- KHR10-KHR20-KHRP40

In case of cold water supply for rinse (8-15 °C),
we recommend to install the heat recovery system option
- KDR64 - KDR94 - KDRA94MT - KDRA184MT

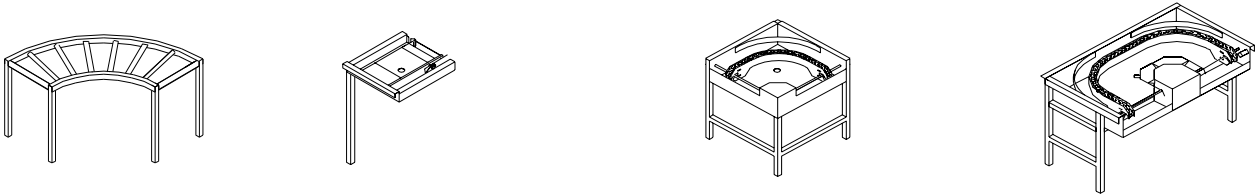
Not recommended for models RK 2960, RK 3260, RK 3560 and RK 3960. Verify with manufacturer

Option compatibility to be confirmed by the manufacturer after verification

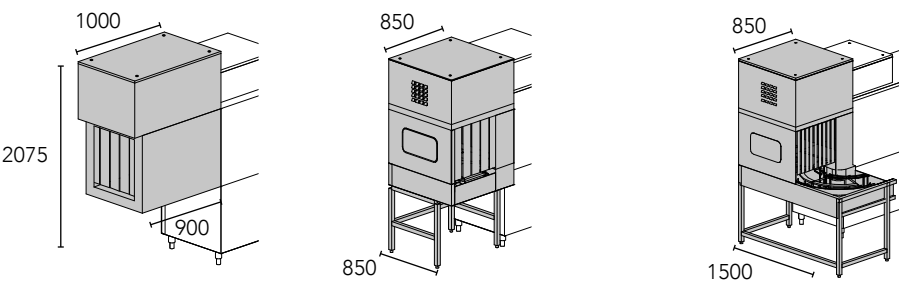


KSC10 Steam condenser	KHR10 Compact Heat recovery	KHR20 Heat recovery	KHRP40 Heat recovery with heat pump	KDR64 4,5 kW Electric KDR69 9 kW Electric Dryer KDR6V Steam dryer
---------------------------------	---------------------------------------	-------------------------------	---	--











AVAILABLE ARCS:



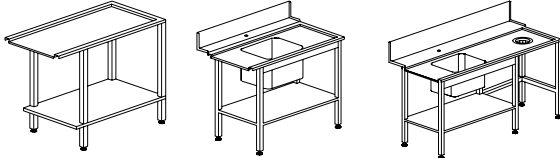







K 21 300x1300x860 H 90° roller arc with tank	K 25 700x610x820 H Angle loading table complete with basket pull-through system	K 22 850x850x885 H 90° motorized arc (clockwise/counter-clockwise)	K 23 850x1500x885 H 180° motorized arc (clockwise/counter-clockwise)
--	---	--	--



KDR94 4,5 kW Electric KDR99 9 kW Electric Dryer KDR9V Steam dryer	KDRA94MT 4,5 kW Electric KDRA99MT 9 kW Electric Dryer with motorized arc 90° KDRA9VMT Steam dryer with motorized arc 90°	KDRA184MT 4,5 kW Electric KDRA189MT 9 kW Electric Dryer with motorized arc 180° KDRA18VMT Steam dryer with motorized arc 180°
--	---	--

	Description	Capacity	Dimensions	Code	
	PLATE BASKET	18 Plates	500x500x105 H	C 40	
	GLASS BASKET WITH GLASS SUPPORT AND ANTI-TIPPING LID		500x500x235 H	C 135	
	LARGE MESH BASKET	For glasses	500x500x105 H	C 44	
	HOLDER FOR GLASS SUPPORT	For glass support (C112-C113-C114)	500x500x50 H	C111	
	GLASS SUPPORT	5x5 Glass Ø 87 mm (C111)	500x500x50 H	C 112	
	GLASS SUPPORT	4x4 Glass Ø 110 mm (C111)	500x500x50 H	C 113	
	GLASS SUPPORT	6x6 Glass Ø 72 mm (C111)	500x500x50 H	C 114	
	TRAYS BASKET	8 pcs max depth 25mm	500x500x105 H	C 43	
	CUTLERY BASKET		490x180x140 H	C 47	
	FLEXIBLE SHOWER complete with mixing group and lever tap, to be fixed to the wall		1000 H	K 1	
	FLEXIBLE SHOWER complete with mixing group and lever tap, to be fixed to the wall and intermediate tap		1000 H	K 1HR	

	Description	Capacity	Dimensions	Code	
	SHELF		1515x620x660 H	K 7M16*	
	GRADING TABLE WITH RUBBER RING	Waste hole and special dimensions upon request	2315x620x660 H 1600x1000x850 H 2400x1000x850 H	K 7M24* K 7A/1600* K 7A/2400*	
	MECHANIZED GRADING TABLE With mechanized basket advancement system	1 waste hole	1800x1240 1525 H	K M7/1800*	
		2 waste holes	2400x1240 1525 H	K M7/2400*	
	Sink 500x400x270 H	Standard rubber ring	1200x590x860 H	K 4B	
			1200x730x860 H	K 55	
			1500x730x860 H	K 8	
			1800x730x860 H	K 9	
	ROLLER TABLE + sink, right or left version Sink 500x400x270 H		1600x730x860 H	K 195	
	LINEAR ROLLER TABLE WITH TANK	Option end microswitch	1100x650x860 H 1600x650x860 H 2100x650x860 H	K 19* K 19/B* K 19/C* K 18	
	LINEAR ROLLER TABLE WITH TANK complete with end microswitch	Not compatible with same references Not on 180° arcs To be connected to KM23 and to dryer on 180°	1100x650x860 H	K 19/1	
			1600x650x860 H	K 19/1A	
			1150x650x860 H	K 20/1	
			1650x650x860 H	K 20/1A	
	90° roller arc with tank (exit only with roller table)	Option connection to prewash tables	1300x1300x860 H	K 21*	
	ANGLE LOADING TABLE complete with basket pull-through system		700x610x820 H	K 25	
	90° MOTORIZED ARC (clockwise/counter-clockwise)		850x850x885 H	KM22*	
	180° MOTORIZED ARC (clockwise/counter-clockwise)		850x1500x885 H	KM23*	

* Wooden cage +2% minimum + € / Special dimensions for tables upon request / Tables shown in right-to-left version
We strongly recommend the presence of a roller table with end microswitch at the exit of our rack conveyor machines for a correct operation



Thanks to the rack conveyor dishwashers of RK PREMIUM series, new efficiency goals are met. The 3R + three-step rinse system ensures considerable savings in terms of water consumption and unmatched quality results. The reduction of heat losses granted by walls thermal insulation, the heat recovered from the steam produced inside the machine (with optional HDR), are just some points of strength of this product range, whose main innovation is an important reduction of waste.

Their user-friendly design characterizes both the washing process and the daily cleaning and maintenance operations. The wide TFT screen makes the access to operating functions easy and comfortable. The IPX5 control panel, the rack-washing arms, the machine sanitization and the automatic drain options, make all the end of the day operations much more comfortable.



FEATURES

STANDARD

- TFT 5.7" display and soft touch keyboard
- IPX5 electronic board
- Easy-access frontal panel
- Constant monitoring of key operating parameters with integrated HACCP interface
- Detailed information and history of alarms in 6 languages
- Chemicals level management and related alerts/information
- SMART DRIVE+ advancement system with 10 speeds
- ECO-DET Detergent economizer
- Triple reinforced rinse 3R+ with adjustable water flow
- 1-DRAIN centralized drain
- Break Tank with integrated booster pump
- Thermal and acoustic insulation, insulated tanks
- Battery auto-cleaning for heat recovery system (if HDR option present)
- Control function for water, energy consumptions and working time
- Possible working modes for dryer unit: all off, only fan or total power + fan (4,5 kW or 9 kW, maximum power according to the model)
- Preset maintenance reminder

OPTIONS

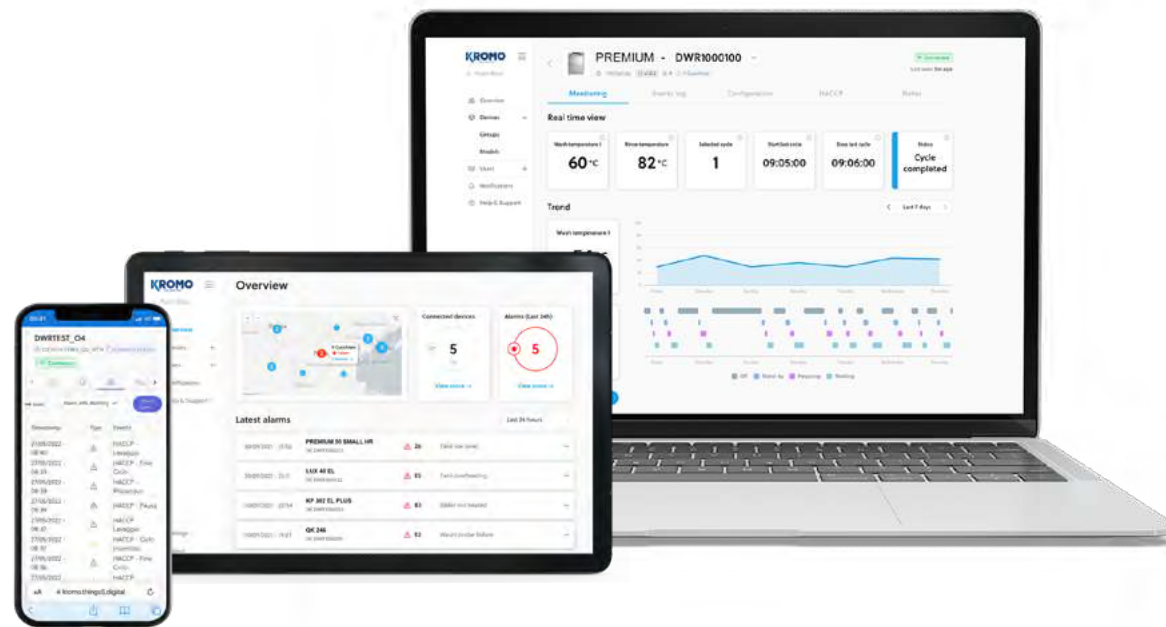
- Automated tanks and boiler fill/drain through SA servovalves
- Detergent dispenser with probe or dispensers kit
- Extra power for boiler
- KHDR200: insulated dryer + heat recovery system
- KHDRA209M and KHDRA218M, insulated, on 90°/180° motorized chain conveyor
- Machine sanitization with dedicated booster pump
- Stainless steel pumps
- CONNECTIVITY remote control compliant with the HACCP norms

CONNECTIVITY 4.0

WHEREVER YOU ARE...

THE SITUATION JUST A CLICK AWAY

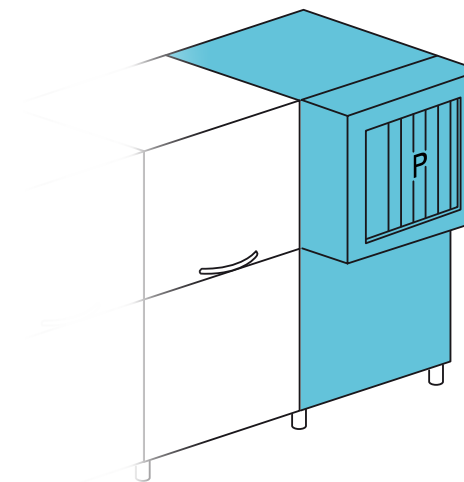
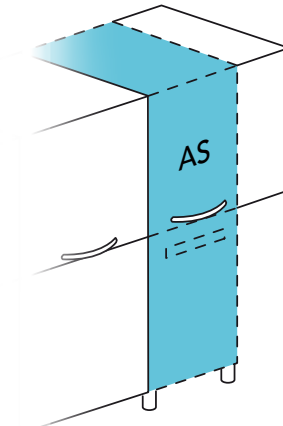
You will be constantly connected to the machine to monitor the work phases, any alarms and remotely configure the parameters according to your needs. Compliant with HACCP regulations.



AS OPTION

AUTOMATIC SHOWER
WITH FILTER DRAWER EASY

Time and energy savings are increased thanks to AS and EASY+, a combined and specific filtering device. Dishes will only need a superficial manual clearing and the automatic shower of the AS module will do a pre-treatment action. (Not available with an installed K10 option).



K10 OPTION

90° CORNER PRE-WASH

The design of our 90° corner pre-wash ensures the best solution taking up the minimal amount of space. Smaller dimensions, same productivity (Available on selected models and without AS option).



View all the working parameters and historical events, working hours and any problems at any time.



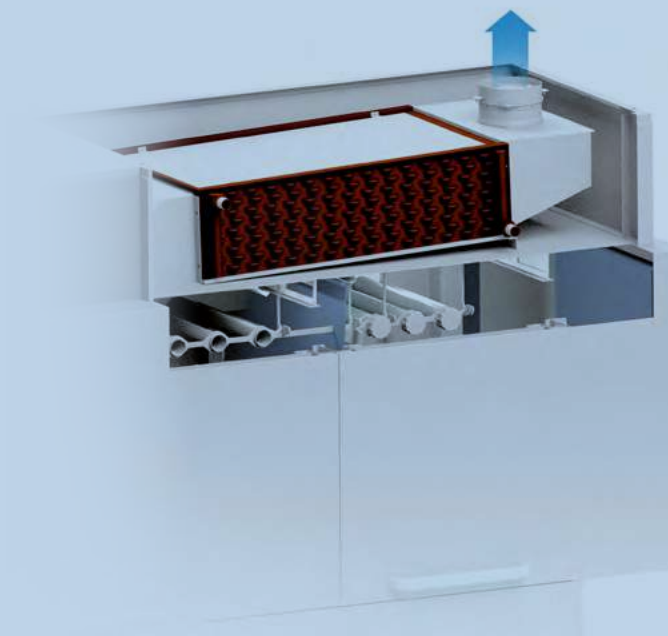
In case of problems, the machine promptly sends an email to you and to the technician who can intervene remotely to solve the problem or equip himself for on-site intervention.



The program allows you to remove an Excel file with all Haccp data at any time.



Discounts are provided for the purchase of 4.0 devices. You will be able to recover 40% of the cost of the car. Request more information to find out more.



HEAT RECOVERY

The heat recovery system allows to supply the machine with cold water*, ensuring at the same time significant savings in terms of energy consumptions. The steam produced by the machine in operation (otherwise dispersed in the working environment) is aspirated and condensed in the heat exchanger (air -water). The heat produced through this process is transferred to the inlet water, bringing it to a temperature of approximately 45 °C and reducing energy consumptions.

*inlet water temperature between 8 °C and 15 °C

Model		Voltage	Capacity	Dimensions	Code
RK 2500					
	RACK EQUIPMENT 1 x C40 1 x C43 1 x C44 1 x C47	400 V 3N ~ 50 Hz 21,08 kW		2250x920 2100/2120 H 350 kg	RK 2500
				AS + 450 mm	RK 2500 AS
			100*/250 rack/h	 530x325x25H	
RK 3000					
	RACK EQUIPMENT 1 x C40 1 x C43 1 x C44 1 x C47	400 V 3N ~ 50 Hz 21,98 kW		2850x920 2100/2120 H 510 kg	RK 3000
				GN 1/1	RK 3000 AS
			135*/300 rack/h	 530x325x25H	
RK 3000-K10					
CORNER PREWASH					
	RACK EQUIPMENT 1 x C40 1 x C43 1 x C44 1 x C47	400 V 3N ~ 50 Hz 21,98 kW		2575x985 2100/2120 H 510 kg	RK 3000-K10
				AS + 450 mm	
			135/300 rack/h	 530x325x25H	
RK 3300					
	RACK EQUIPMENT 1 x C40 1 x C43 1 x C44 1 x C47	400 V 3N ~ 50 Hz 26,26 kW		3150x920 2100/2120 H 550 kg	RK 3300
				AS + 450 mm	RK 3300 AS
			150/330 rack/h	 530x325x25H	

Model		Voltage	Capacity	Dimensions	Code
RK 3600					
	RACK EQUIPMENT 1 x C40 1 x C43 1 x C44 1 x C47	400 V 3N ~ 50 Hz 37,66 kW		3750x920 2100/2120 H 710 kg	RK 3600
				AS + 450 mm	RK 3600 AS
			190*/360 rack/h	 530x325x25H	
RK 3600-K10					
	RACK EQUIPMENT 1 x C40 1 x C43 1 x C44 1 x C47	400 V 3N ~ 50 Hz 37,66 kW		3475x985 2100/2120 H 710 kg	RK 3600-K10
				GN 1/1	
			190*/360 rack/h	 530x325x25H	
RK 4000					
CORNER PREWASH					
	RACK EQUIPMENT 1 x C40 1 x C43 1 x C44 1 x C47	400 V 3N ~ 50 Hz 40,44 kW		4050x920 2100/2120 H 750 kg	RK 4000
				GN 1/1	RK 4000 AS
			210*/400 rack/h	 530x325x25H	

- P** Prewash
W Wash
3R Pre-rinse + rinse on module
K10 Corner prewash
AS Automatic shower with filter drawer +450 mm
***** Productivity according to DIN SPEC 10534 (contact time)
- EAC label upon request
Option compatibility to be confirmed by the manufacturer after verification

OPTIONS

				PRE DOS	DDE	DOS/S	SAN	PAP-SAN	DWI	XP												
Model	220-240 V 3 50 Hz	380-415 V 3N 50 Hz	60 Hz	Kromo disp. connec- tions	Dispensers kit	Dispenser with Probe	Sanitization	Booster Pump Sanitization	Thermoa- coustic and Tank insulation	Extra Power	Model	Price per division	CONNECTIVITY (HACCP)	S/S pumps	Automatic Drain	Centra- lized Drain	Autotimer	Rinse Booster pump	Break Tank	DVGW	Detergent saving system	Smart drive +
RK 2500	€	●	+3%	●	€	€	€	€	●	€	RK 2500	€	€	€	€	●	●	●	●	€	●	●
RK 2500 AS	€	●	+3%	●	€	€	€	€	●	€	RK 2500 AS	€	€	€	€	●	●	●	●	€	●	●
RK 3000	€	●	+3%	●	€	€	€	€	●	€	RK 3000	€	€	€	€	●	●	●	●	€	●	●
RK 3000 AS	€	●	+3%	●	€	€	€	●	●	€	RK 3000 AS	€	€	€	€	●	●	●	●	€	●	●
RK 3000-K10	€	●	+3%	●	€	€	€	€	●	€	RK 3000-K10	€	€	€	€	●	●	●	●	€	●	●
RK 3300	€	●	+3%	●	€	€	€	€	●	€	RK 3300	€	€	€	€	●	●	●	●	€	●	●
RK 3300 AS	€	●	+3%	●	€	€	€	●	●	€	RK 3300 AS	€	€	€	€	●	●	●	●	€	●	●
RK 3600	€	●	+3%	●	€	€	€	●	●	€	RK 3600	€	€	€	€	●	●	●	●	€	●	●
RK 3600 AS	€	●	+3%	●	€	€	€	●	●	€	RK 3600 AS	€	€	€	€	●	●	●	●	€	●	●
RK 3600-K10	€	●	+3%	●	€	€	€	●	●	€	RK 3600-K10	€	€	€	€	●	●	●	●	€	●	●
RK 4000	€	●	+3%	●	€	€	€	●	●	€	RK 4000	€	€	€	€	●	●	●	●	€	●	●
RK 4000 AS	€	●	+3%	●	€	€	€	●	●	€	RK 4000 AS	€	€	€	€	●	●	●	●	€	●	●

- Standard
- DDE-GROUP

Both detergent (with probe) and rinse-aid dispenser included
- DOS/S

For detergent dispenser only
- SAN

Including dosing system for sanitizing product
- PAP-SAN

Supplied AS standard with sanitization option on models:
RK 3000 AS, RK 3300 AS, RK 3600, RK 3600 AS, RK 3600 K10, RK 4000, RK 4000 AS
- DIV

Compulsory for machines > 4,5m length
- XP

In case of cold water supply for rinse (8-55 °C) and without any heat recovery, the extra power option is mandatory

- KSC10

Available only with optional dryer
- KSC15

Not available with optional dryer
- KHR20


Either KHR15, KHRP40
- KHRP40


Available with 400 V 3N 50 Hz frequency only
- KHR15-KHR20-KHRP40

In case of cold water supply for rinse (8-15 °C), we recommend to install the heat recovery system option
- KDR204

Not recommended for models RK 3000, RK 3300, RK 3600 and RK 4000, verify with manufacturer
- KDRA99MT - KDRA189MT

Mandatory division
- Option compatibility to be confirmed by the manufacturer after verification







AS


Automatic Shower
with filter drawer


K10


Corner prewash














KHDR200 4,5kW

Electric Dryer
+ Heat Recovery

KDRA209M 4,5kW

Electric Dryer
on 90° motorized arc
+ Heat Recovery

KDRA218M 4,5kW

Electric Dryer
on 180 ° motorized
arc + Heat Recovery

KDR204 4,5kW

KDR209 9 kW
Insulated Dryer

KDRA99MT 9 kW

Dryer with motorized
arc 90°

KDRA189MT 9 kW

Dryer with motorized
arc 180°

OPTIONS

	KLC30	KSC10	KSC15	KHR15	KHR20	KHRP40		KHDR200	KHDRA209M	KHDRA218M	KDR204	KDR209	KDRA99MT	KDRA189MT
Model	Splash guard + 300 mm	Steam Condenser	Steam Condenser	Heat Recovery	Heat Recovery	Heat Recovery	Model	Dryer	Dryer	Dryer	Dryer	Insulated Dryer	Dryer with motorized arc 90°	Dryer with motorized arc 180°
RK 2500	€	€	€	€	€	€	RK 2500	€	€	€	€	€	€	€
RK 2500 AS	€	€	€	€	€	€	RK 2500 AS	€	€	€	€	€	€	€
RK 3000	€	€	€	€	€	€	RK 3000	€	€	€	€	€	€	€
RK 3000 AS	€	€	€	€	€	€	RK 3000 AS	€	€	€	€	€	€	€
RK 3000-K10	€	€	€	€	€	€+	RK 3000-K10	€	€	€	€	€	€	€
RK 3300	€	€	€	€	€	€	RK 3300	€	€	€	€	€	€	€
RK 3300 AS	€	€	€	€	€	€	RK 3300 AS	€	€	€	€	€	€	€
RK 3600	€	€	€	€	€	€	RK 3600	€	€	€	€	€	€	€
RK 3600 AS	€	€	€	€	€	€	RK 3600 AS	€	€	€	€	€	€	€
RK 3600-K10	€	€	€	€	€	€+	RK 3600-K10	€	€	€	€	€	€	€
RK 4000	€	€	€	€	€	€	RK 4000	€	€	€	€	€	€	€
RK 4000 AS	€	€	€	€	€	€	RK 4000 AS	€	€	€	€	€	€	€

---- Not available

KHDR200 Dryer + heat recovery. Fully insulated device. Either KHDRA209M or KHDRA218M

KHDRA209M Dryer + heat recovery on 90° motorized arc. Fully insulated device. Either KHDR200 or KHDRA218M

KHDRA218M Dryer + heat recovery on 180° motorized arc. Fully insulated device. Either KHDR200 or KHDRA209M. Mandatory division.

+ Not available for K10 version if the machine is next to the wall

In case of cold water supply for rinse (8-15 °C), we recommend to install the heat recovery system option

With osmotic water supply and electrical conductivity lower than 200 microsiemens, it is mandatory to install a stainless steel heat exchanger

Warm water supply 55 °C

CONNECTIVITY Includes HACCP option. 10-year plan

PI Available with 50 Hz frequency only. Not available for AS module

DVGW Not available with heat recovery and steam condenser
Components prescribed by DVGW on request (check option compatibility with the manufacturer)

In case of cold water supply for rinse (8-15 °C), we recommend to install the heat recovery system option

With osmotic water supply and electrical conductivity lower than 200 microsiemens, it is mandatory to install a stainless steel heat exchange


Warm water supply 55 °C

We recommend to install the machine in a well-ventilated room, with a properly sized steam exhausting system


Standard hints for scheduled maintenance and counters (working hours - water - energy)

Option compatibility to be confirmed by the manufacturer after verification


AVAILABLE ARCS:




K 21 1300x1300x860 H
90° roller arc with tank




K 25 700x610x820 H
Angle loading table complete with basket pull-through system




K 22 850x850x885 H
90° motorized arc (clockwise/counter-clockwise)




K 23 850x1500x885 H
180° motorized arc (clockwise/counter-clockwise)




KSC10
Steam condenser




KSC15
Steam condenser










KHR15
Compact heat recovery
















KHR20
Heat recovery



KHRP40
Heat recovery with heat pump

	Description	Capacity	Dimensions	Code	
	PLATE BASKET	18 Plates	500x500x105 H	C 40	
	GLASS BASKET WITH GLASS SUPPORT AND ANTI-TIPPING LID		500x500x235 H	C 135	
	LARGE MESH BASKET	For glasses	500x500x105 H	C 44	
	HOLDER FOR GLASS SUPPORT	For glass support (C112-C113-C114)	500x500x50 H	C111	
	GLASS SUPPORT	5x5 Glass Ø 87 mm (C111)	500x500x50 H	C 112	
	GLASS SUPPORT	4x4 Glass Ø 110 mm (C111)	500x500x50 H	C 113	
	GLASS SUPPORT	6x6 Glass Ø 72 mm (C111)	500x500x50 H	C 114	
	TRAYS BASKET	8 pcs max depth 25mm	500x500x105 H	C 43	
	CUTLERY BASKET		490x180x140 H	C 47	
	FLEXIBLE SHOWER complete with mixing group and lever tap, to be fixed to the wall		1000 H	K 1	
	FLEXIBLE SHOWER complete with mixing group and lever tap, to be fixed to the wall and intermediate tap		1000 H	K 1HR	

	Description	Capacity	Dimensions	Code	
	SHELF		1515x620x660 H	K 7M16*	
	GRADING TABLE WITH RUBBER RING	Waste hole and special dimensions upon request	2315x620x660 H	K 7M24*	
			1600x1000x850 H	K 7A/1600*	
			2400x1000x850 H	K 7A/2400*	
	MECHANIZED GRADING TABLE With mechanized basket advancement system	1 waste hole	1800x1240 1525 H	K M7/1800*	
		2 waste holes	2400x1240 1525 H	K M7/2400*	
	Sink 500x400x270 H	Standard rubber ring	1200x590x860 H	K 4B	
	Sink 500x400x270 H	Standard rubber ring	1200x730x860 H	K 55	
	Sink 500x400x270 H	Standard rubber ring	1500x730x860 H	K 8	
			1800x730x860 H	K 9	
	ROLLER TABLE + sink, right or left version Sink 500x400x270 H		1600x730x860 H	K 195	
	LINEAR ROLLER TABLE WITH TANK	Option end microswitch	1100x650x860 H	K 19*	
			1600x650x860 H	K 19/B*	
			2100x650x860 H	K 19/C*	
				K 18	
	LINEAR ROLLER TABLE WITH TANK complete with end microswitch	Not compatible with same references Not on 180° arcs	1100x650x860 H	K 19/1	
			1600x650x860 H	K 19/1A	
		To be connected to KM23 only and to dryer on 180°	1150x650x860 H	K 20/1	
			1650x650x860 H	K 20/1A	
	90° roller arc with tank (exit only with roller table)		1300x1300x860 H	K 21*	
	ANGLE LOADING TABLE complete with basket pull-through system	Option connection to prewash tables	700x610x820 H	K 25	
	90° MOTORIZED ARC (clockwise/counter-clockwise)		850x850x885 H	KM22*	
	180° MOTORIZED ARC (clockwise/counter-clockwise)		850x1500x885 H	KM23*	

* Wooden cage +2% minimum + € / Special dimensions for tables upon request / Tables shown in right-to-left version
We strongly recommend the presence of a roller table with end microswitch at the exit of our rack conveyor machines for a correct operation



Kromo flight-conveyor dishwashers are the ideal solution to deal with heavy workloads, as in the case of large canteens for schools, hospitals, hotel, cruise ships, catering services and airports. Our QK LUX line features a wide range of models, that may be also combined with tray and rack conveyor dishwashers or with different accessories in order to develop an increasing number of customized solutions to meet the requests of our clients.

QK LUX models have been updated and designed to offer a fully-equipped and cost-effective product for specialists as well as end-users.

In this sense, main technical improvements by Kromo are represented by a fully automatic drain system, grouped wash arms and intermediate surface filters in stainless steel. With its elegant structure and outstanding performances, the QK LUX was designed in a real eco-friendly perspective:

features like detergent economizer, a concept of thermal insulation, CPF system and double reinforced rinse reflect our strong commitment to continually undertake extensive research on green and cost-effective innovations.

Possibility to select from seven entirely customizable models, which however maintain some of the distinctive features of the Kromo brand, such as the usable belt width of 710 mm, usable height of 450 mm and in particular the compliance with DIN SPEC 10534 norms while preserving limited dimensions, lower than the market average at an equal production capacity: QK LUX belt allows to wash three dishes per row instead of two, thus granting productivity rates even higher than 9.000 dishes/hour in conformity with washing regulations.

What else to say, other than just try a QK LUX dishwasher!



FEATURES

STANDARD

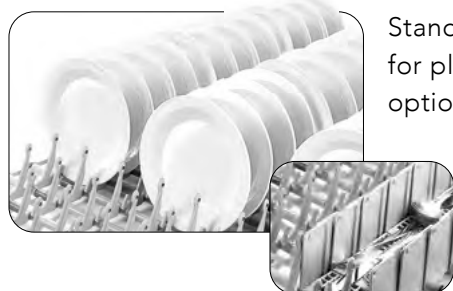
- SMART DRIVE 5 speed advancement system
- 710 mm wide conveyor
- Plates belt
- TFT 5.7" display and soft touch keyboard
- Frequently used keys shortcut and menu language setting
- Constant monitoring of key operations
- IPX5 electronic board
- Alarms and events report
- Autotimer
- Centralized 1-DRAIN and automatic AD drain, with total or partial emptying of the tanks
- Wash arms ALL-IN-1
- Use economizer
- ECO-DET Detergent economizer
- ACID PROOF Radial wash tanks in S/S AISI 316 inclined to provide complete drainage of the wash water
- S/S surface filters CLEAN+ to protect the wash tanks as well as the wash pump
- Double-skin, insulated and counterbalanced doors, equipped with anti-drop safety system
- THERMO BARRIER system for comfort in use
- Predisposition for Kromo rinse-aid and detergent dispensers connection
- Non return valve
- ACID PROOF stainless steel boilers in AISI 316, fully insulated to reduce thermal loss.
- Vertical self-cleaning pumps
- Reinforced double rinse 2R+, improved efficiency with lower consumption
- CPF System: Controlled Pressure Flow
- Water, energy consumptions and working time control system
- Possible working modes for dryer unit: all off, only fan, half power 4,5 kW + fan, total power 9 kW + fan



OPTIONS

- Five different conveyor belts available, also with cutlery lane
- Double skin shelf or dryer module
- Steam condenser
- Three models of heat recovery to be chosen
- AS6 automatic shower with EASY+ with filter system (+600 mm)
- Dispensers kit with peristaltic pump, for detergent
- as well as rinse-aid
- CONNECTIVITY remote control compliant with the HACCP norms
- Delivery in two or more parts, to ease installation operations
- Automatic self-cleaning of the machine available,
- with dedicated booster pump on request
- Thermal and acoustic insulation
- Tank insulation
- Break tank and booster pump
- Dedicated space for detergent and rinse-aid jugs
- S/S pumps
- Extra power in the boiler

STANDARD BELT



Standard belt
for plates and
optional cutlery lane



Standard belt
for glasses



Standard belt
for trays and utensils

OPTIONAL BELT



Special belt
for hospitals



Special belt
for thermal trays



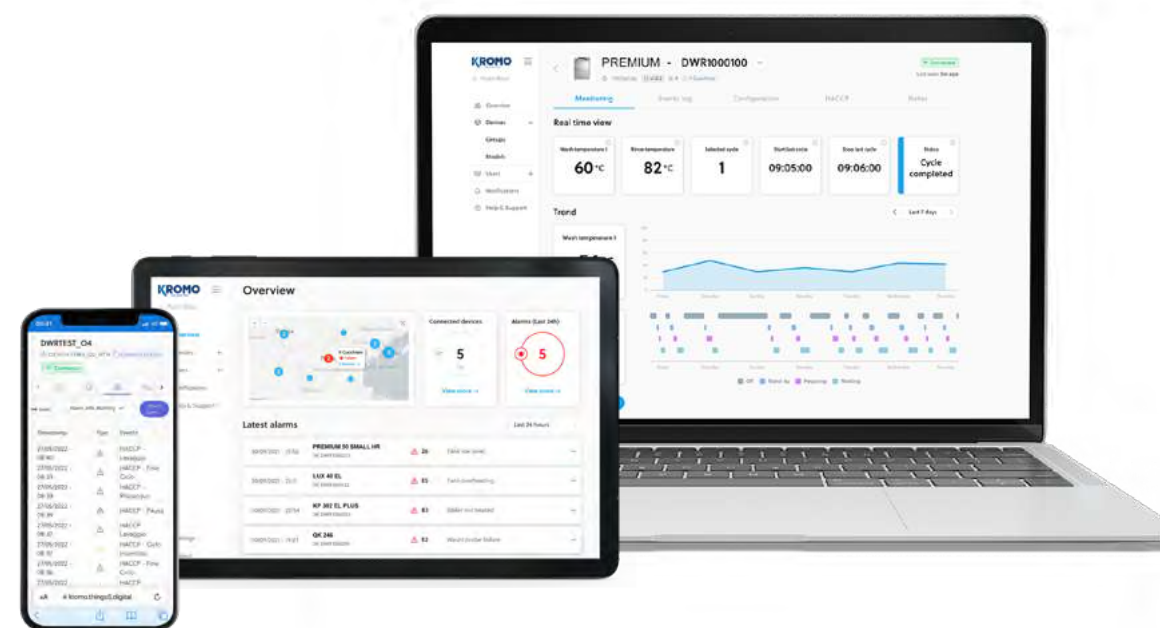
Special belt
for in-flight catering

CONNECTIVITY 4.0

WHEREVER YOU ARE...

YOUR DISHWASHER, JUST A CLICK AWAY

You will be constantly connected to the machine to monitor the work phases, review any eventual alarm and configure remotely the operating parameters according to your needs. Compliant with HACCP norms.



View all the working parameters and event records, working hours and any problem at any time.



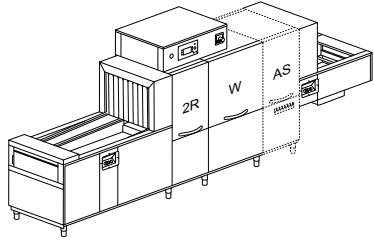

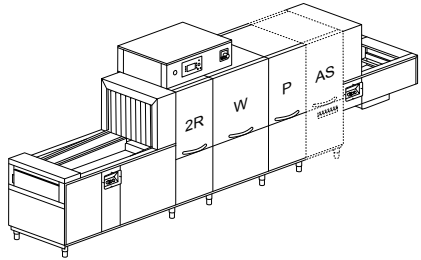

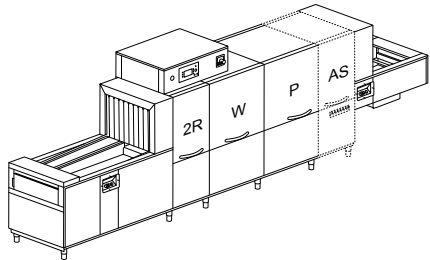

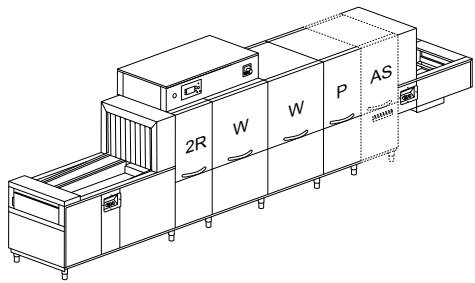
In case of problem, the machine promptly alerts you. The technician can intervene remotely to solve the problem or anticipate the needed parts for an on-site intervention.

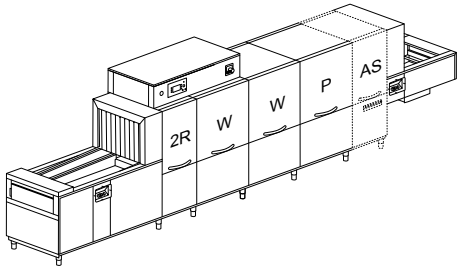

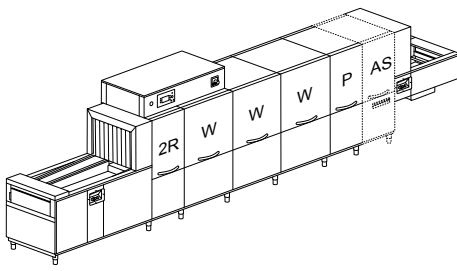

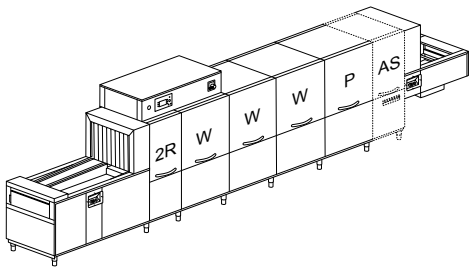



A daily activity report is available with all the events related to the dishwasher in a detailed spreadsheet with HACCP data.



Our Connectivity system is a revolutionary device limiting and facilitating the eventual intervention of a technician who can anticipate the necessary parts to be replaced, saving time and money.

Model	Voltage	Capacity	Poids	Code
QK 2460 <i>IMPROVED</i>				
	400 V 3N ~ 50 Hz 27 kW	 450 H		QK 2460
		 710	4500x985 1860/2200H 595 kg	QK 2460 AS6
	400 V 3N ~ 50 Hz 2,5 kW 17 kg/h	1950/3690 dishes/h	AS6 +600 mm	QK 2460 V
		2400* dishes/h		QK 2460 AS6 V
QK 3760 <i>IMPROVED</i>				
	400 V 3N ~ 50 Hz 29,45 kW	 450 H		QK 3760
		 710	5100x985 1860/2200H 730 kg	QK 3760 AS6
	400 V 3N ~ 50 Hz 3,45 kW 20 kg/h	2400/4050 dishes/h	AS6 +600 mm	QK 3760 V
		3300* dishes/h		QK 3760 AS6 V
QK 4160 <i>IMPROVED</i>				
	400 V 3N ~ 50 Hz 33,5 kW	 450 H		QK 4160
		 710	5400x985 1860/2200H 745 kg	QK 4160 AS6
	400 V3N ~ 50 Hz 4,5 kW 25 kg/h	3000/4800 dishes/h	AS6 +600 mm	QK 4160 V
		3750* dishes/h		QK 4160 AS6 V
QK 5360 <i>IMPROVED</i>				
	400 V3N ~ 50 Hz 49,45 kW	 450 H		QK 5360
		 710	6000x985x 860/2200H 880 kg	QK 5360 AS6
	400 V 3N ~ 50 Hz 5,45 kW 29 kg/h	4200/6450 dishes/h	AS6 +600 mm	QK 5360 V
		4650* dishes/h		QK 5360 AS6 V

Model	Voltage	Capacity	Poids	Code
QK 5960 <i>IMPROVED</i>				
	400 V 3N ~ 50 Hz 53,5 kW	 450 H		QK 5960
		 710	6300x985 1860/2200H 895 kg	QK 5960 AS6
	400 V 3N ~ 50 Hz 6,5 kW 34 kg/h	4350/6750 dishes/h	AS6 +600 mm	QK 5960 V
		5100* dishes/h		QK 5960 AS6 V
QK 6760 <i>IMPROVED</i>				
	400 V 3N ~ 50 Hz 69,45 kW	 450 H		QK 6760
		 710	7300x985 1860/2200H 1030 kg	QK 6760 AS6
	400 V 3N ~ 50 Hz 7,45 kW 39 kg/h	5250/8100 dishes/h	AS6 +600 mm	QK 6760 V
		6000* dishes/h		QK 6760 AS6 V
QK 7760 <i>IMPROVED</i>				
	400 V 3N ~ 50 Hz 72,5 kW	 450 H		QK 7760
		 710	7600x985 1860/2200H 1045 kg	QK 7760 AS6
	400 V 3N ~ 50 Hz 8,5 kW 43 kg/h	5850/9000 dishes/h	AS6 +600 mm	QK 7760 V
		6450* dishes/h		QK 7760 AS6 V

- P** Prewash
W Wash
2R Pre-rinse + rinse on module
AS6 Automatic shower with filter drawer +600 mm
V Steam-heated
***** In compliance with DIN SPEC 10534 regulation (contact time)
EAC label upon request
Option compatibility to be confirmed by the manufacturer after verification

OPTIONS

AUTOTIMER									PAP-SAN									DWI		DWI / T		CONNECTIVITY		XP	PAP	DRIVE
Model	220-240 V 3 50 Hz	380-415 V 3N 50 Hz	60 Hz	Autotimer	Kromo disp. connections	Dispensers kit	Dispenser with probe	Sanitization	Model	Booster pump sanitization	Thermoacoustic insulation	Tanks insulation	CONNECTIVITY (HACCP)	Extra power	Booster pump	Smart drive										
QK 2460	+ 2%	●	+ 3%	●	●	€	€	€	QK 2460	€	€	€	€	€	€	●										
QK 2460 AS6	+ 2%	●	+ 3%	●	●	€	€	€	QK 2460 AS6	€	€	€	€	€	€	●										
QK 2460 V	+ 1%	●	+ 3%	●	●	€	€	€	QK 2460 V	€	€	€	€	□	€	●										
QK 2460 AS6 V	+ 1%	●	+ 3%	●	●	€	€	€	QK 2460 AS6 V	€	€	€	€	□	€	●										
QK 3760	+ 2%	●	+ 3%	●	●	€	€	€	QK 3760	€	€	€	€	€	€	●										
QK 3760 AS6	+ 2%	●	+ 3%	●	●	€	€	€	QK 3760 AS6	●	€	€	€	€	€	●										
QK 3760 V	+ 1%	●	+ 3%	●	●	€	€	€	QK 3760 V	€	€	€	€	□	€	●										
QK 3760 AS6 V	+ 1%	●	+ 3%	●	●	€	€	€	QK 3760 AS6 V	●	€	€	€	□	€	●										
QK 4160	+ 2%	●	+ 3%	●	●	€	€	€	QK 4160	€	€	€	€	€	€	●										
QK 4160 AS6	+ 2%	●	+ 3%	●	●	€	€	€	QK 4160 AS6	●	€	€	€	€	€	●										
QK 4160 V	+ 1%	●	+ 3%	●	●	€	€	€	QK 4160 V	€	€	€	€	□	€	●										
QK 4160 AS6 V	+ 1%	●	+ 3%	●	●	€	€	€	QK 4160 AS6 V	●	€	€	€	□	€	●										
QK 5360	+ 2%	●	+ 3%	●	●	€	€	€	QK 5360	●	€	€	€	€	€	●										
QK 5360 AS6	+ 2%	●	+ 3%	●	●	€	€	€	QK 5360 AS6	●	€	€	€	€	€	●										
QK 5360 V	+ 1%	●	+ 3%	●	●	€	€	€	QK 5360 V	●	€	€	€	€	€	●										
QK 5360 AS6 V	+ 1%	●	+ 3%	●	●	€	€	€	QK 5360 AS6 V	●	€	€	€	€	€	●										
QK 5960	+ 2%	●	+ 3%	●	●	€	€	€	QK 5960	●	€	€	€	€	€	●										
QK 5960 AS6	+ 2%	●	+ 3%	●	●	€	€	€	QK 5960 AS6	●	€	€	€	€	€	●										
QK 5960 V	+ 1%	●	+ 3%	●	●	€	€	€	QK 5960 V	●	€	€	€	€	€	●										
QK 5960 AS6 V	+ 1%	●	+ 3%	●	●	€	€	€	QK 5960 AS6 V	●	€	€	€	€	€	●										
QK 6760	+ 2%	●	+ 3%	●	●	€	€	€	QK 6760	●	€	€	€	€	€	●										
QK 6760 AS6	+ 2%	●	+ 3%	●	●	€	€	€	QK 6760 AS6	●	€	€	€	€	€	●										
QK 6760 V	+ 1%	●	+ 3%	●	●	€	€	€	QK 6760 V	●	€	€	€	€	€	●										
QK 6760 AS6 V	+ 1%	●	+ 3%	●	●	€	€	€	QK 6760 AS6 V	●	€	€	€	€	€	●										
QK 7760	+ 2%	●	+ 3%	●	●	€	€	€	QK 7760	●	€	€	€	€	€	●										
QK 7760 AS6	+ 2%	●	+ 3%	●	●	€	€	€	QK 7760 AS6	●	€	€	€	€	€	●										
QK 7760 V	+ 1%	●	+ 3%	●	●	€	€	€	QK 7760 V	●	€	€	€	□	€	●										
QK 7760 AS6 V	+ 1%	●	+ 3%	●	●	€	€	€	QK 7760 AS6 V	●	€	€	€	□	€	●										

- Standard
- Upon request

DDE-GROUP Both detergent (with probe) and rinse-aid dispensers included

DWI Insulation option for the tunnel only, dryer excluded. Shelf dryer can be double skin upon request

Peak-cut connect upon request

Warm water supply 55 °C

We recommend to install the machine in a well-ventilated room, with a properly sized steam exhausting system.

DWI - DWI/T Recommended with KHRF10 - KHRF20 - KHRPF40

CONNECTIVITY Includes HACCP option. 10-year plan

PAP-SAN One standard pump for models QK 5360, QK 5960, QK 6760, QK 7760

XP In case of cold water supply for rinse (8-55 °C) and without any heat recovery, the extra power option is mandatory.
In case of cold water supply for rinse (8-15 °C), we recommend the heat recovery option.

Option compatibility to be confirmed by the manufacturer after verification

OPTIONS

																PI	1-DRAIN		AD		ECO-DET	X-BELT	LANE	DIV	BT	DVGW
Model	5 speeds	Master switch	Surface filters	Peak-cut for Kromo dosing	Estimated consumption readout	S/S pumps	Centralized drain	Model	Automatic drain	Chemicals saving system	Special belt	Cutlery lane	Price per division	Break tank	DVGW											
QK 2460	●	●	●	●	●	€	●	QK 2460	●	●	+ 7 %	----	€	€	€											
QK 2460 AS6	●	●	●	●	●	€	●	QK 2460 AS6	●	●	+ 7 %	----	€	€	€											
QK 2460 V	●	●	●	●	●	€	●	QK 2460 V	●	●	+ 7 %	----	€	€	€											
QK 2460 AS6 V	●	●	●	●	●	€	●	QK 2460 AS6 V	●	●	+ 7 %	----	€	€	€											
QK 3760	●	●	●	●	●	€	●	QK 3760	●	●	+ 7 %	----	€	€	€											
QK 3760 AS6	●	●	●	●	●	€	●	QK 3760 AS6	●	●	+ 7 %	----	€	€	€											
QK 3760 V	●	●	●	●	●	€	●	QK 3760 V	●	●	+ 7 %	----	€	€	€											
QK 3760 AS6 V	●	●	●	●	●	€	●	QK 3760 AS6 V	●	●	+ 7 %	----	€	€	€											
QK 4160	●	●	●	●	●	€	●	QK 4160	●	●	+ 7 %	+ 5 %	€	€	€											
QK 4160 AS6	●	●	●	●	●	€	●	QK 4160 AS6	●	●	+ 7 %	----	€	€	€											
QK 4160 V	●	●	●	●	●	€	●	QK 4160 V	●	●	+ 7 %	+ 5 %	€	€	€											
QK 4160 AS6 V	●	●	●	●	●	€	●	QK 4160 AS6 V	●	●	+ 7 %	----	€	€	€											
QK 5360	●	●	●	●	●	€	●	QK 5360	●	●	+ 7 %	----	€	€	€											
QK 5360 AS6	●	●	●	●	●	€	●	QK 5360 AS6	●	●	+ 7 %	----	€	€	€											
QK 5360 V	●	●	●	●	●	€	●	QK 5360 V	●	●	+ 7 %	----	€	€	€											
QK 5360 AS6 V	●	●	●	●	●	€	●	QK 5360 AS6 V	●	●	+ 7 %	----	€	€	€											
QK 5960	●	●	●	●	●	€	●	QK 5960	●	●	+ 7 %	+ 5 %	€	€	€											
QK 5960 AS6	●	●	●	●	●	€	●	QK 5960 AS6	●	●	+ 7 %	----	€	€	€											
QK 5960 V	●	●	●	●	●	€	●	QK 5960 V	●	●	+ 7 %	+ 5 %	€	€	€											
QK 5960 AS6 V	●	●	●	●	●	€	●	QK 5960 AS6 V	●	●	+ 7 %	----	€	€	€											
QK 6760	●	●	●	●	●	€	●	QK 6760	●	●	+ 7 %	----	€	€	€											
QK 6760 AS6	●	●	●	●	●	€	●	QK 6760 AS6	●	●	+ 7 %	----	€	€	€											
QK 6760 V	●	●	●	●	●	€	●	QK 6760 V	●	●	+ 7 %	----	€	€	€											
QK 6760 AS6 V	●	●	●	●	●	€	●	QK 6760 AS6 V	●	●	+ 7 %	----	€	€	€											
QK 7760	●	●	●	●	●	€	●	QK 7760	●	●	+ 7 %	+ 5 %	€	€	€											
QK 7760 AS6	●	●	●	●	●	€	●	QK 7760 AS6	●	●	+ 7 %	----	€	€	€											
QK 7760 V	●	●	●	●	●	€	●	QK 7760 V	●	●	+ 7 %	+ 5 %	€	€	€											
QK 7760 AS6 V	●	●	●	●	●	€	●	QK 7760 AS6 V	●	●	+ 7 %	----	€	€	€											

● Standard

---- Not available

LANE Only with KDRF69 and KDRF6V

DIV Compulsory for machines > 4,5 m length

BT Booster pump included









DVGW Not available with heat recovery and steam condenser
Components prescribed by DVGW on request (check option compatibility with the manufacturer)

Option compatibility to be confirmed by the manufacturer after verification

OPTIONS

	NZ3	NZ6	NZH6	KDRF69	KDRF6V	ID	KDRF99M	KDRF9VM		KDRF99MB	KDRF9VMB	KSCF10	KHRF10	KHRF20	KHRPF40	3R	STOCK
Model	Neutral zone 300	Neutral zone 600	Neutral zone for dryer 600	Shelf dryer	Steam-heated shelf dryer	Double skin for shelf dryer	Dryer module	Steamheated dryer module	Model	Dryer module with blowers	Module steam dryer with blowers	Steam condenser	Heat recovery	Heat recovery	Heat recovery	Triple rinse	Chemicals compartment
QK 2460 - QK 2460 AS6	€	€	€	€	----	€	€	----	QK 2460 - QK 2460 AS6	€	----	€	€	€ *	€ *	€	€
QK 2460 V - QK 2460 AS6 V	€	€	€	€	€	€	€	€	QK 2460 V - QK 2460 AS6 V	€	€	€	€	€ *	€ *	€	€
QK 3760 - QK 3760 AS6	€	€	€	€	----	€	€	----	QK 3760 - QK 3760 AS6	€	----	€	€	€	€	€	€
QK 3760 V - QK 3760 AS6 V	€	€	€	€	€	€	€	€	QK 3760 V - QK 3760 AS6 V	€	€	€	€	€	€	€	€
QK 4160 - QK 4160 AS6	€	€	€	€	----	€	€	----	QK 4160 - QK 4160 AS6	€	----	€	€	€	€	€	€
QK 4160 V - QK 4160 AS6 V	€	€	€	€	€	€	€	€	QK 4160 V - QK 4160 AS6 V	€	€	€	€	€	€	€	€
QK 5360 - QK 5360 AS6	€	€	€	€	----	€	€	----	QK 5360 - QK 5360 AS6	€	----	€	€	€	€	€	€
QK 5360 V - QK 5360 AS6 V	€	€	€	€	€	€	€	€	QK 5360 V - QK 5360 AS6 V	€	€	€	€	€	€	€	€
QK 5960 - QK 5960 AS6	€	€	€	€	----	€	€	----	QK 5960 - QK 5960 AS6	€	----	€	€	€	€	€	€
QK 5960 V - QK 5960 AS6 V	€	€	€	€	€	€	€	€	QK 5960 V - QK 5960 AS6 V	€	€	€	€	€	€	€	€
QK 6760 - QK 6760 AS6	€	€	€	€	----	€	€	----	QK 6760 - QK 6760 AS6	€	----	€	€	€	€	€	€
QK 6760 V - QK 6760 AS6 V	€	€	€	€	€	€	€	€	QK 6760 V - QK 6760 AS6 V	€	€	€	€	€	€	€	€
QK 7760 - QK 7760 AS6	€	€	€	€	----	€	€	----	QK 7760 - QK 7760 AS6	€	----	€	€	€	€	€	€
QK 7760 V - QK 7760 AS6 V	€	€	€	€	€	€	€	€	QK 7760 V - QK 7760 AS6 V	€	€	€	€	€	€	€	€

----	Not available	KDRF99M - KDRF9VM	Module with front door
*	Available only with AS6	TRIPLO RISCIAQUO 3R	Reverse osmosis on request
NZ3	Recommended with big quantities of trays to wash	KHRF10 - KHRF20 - KHRPF40	case of cold water supply for rinse (8-15 °C), we recommend to install the optional heat recovery system
NZ6	Recommended for big quantities of trays to wash. Module equipped with a front door	With osmotic water supply and electrical conductivity lower than 200 microsiemens, it is mandatory to install a stainless steel heat exchanger	
NZH6	Recommended with dryers with blowers	Option compatibility to be confirmed by the manufacturer after verification	
ID	Recommended option for KDRF69 and KDRF6V. Only for shelf dryer		

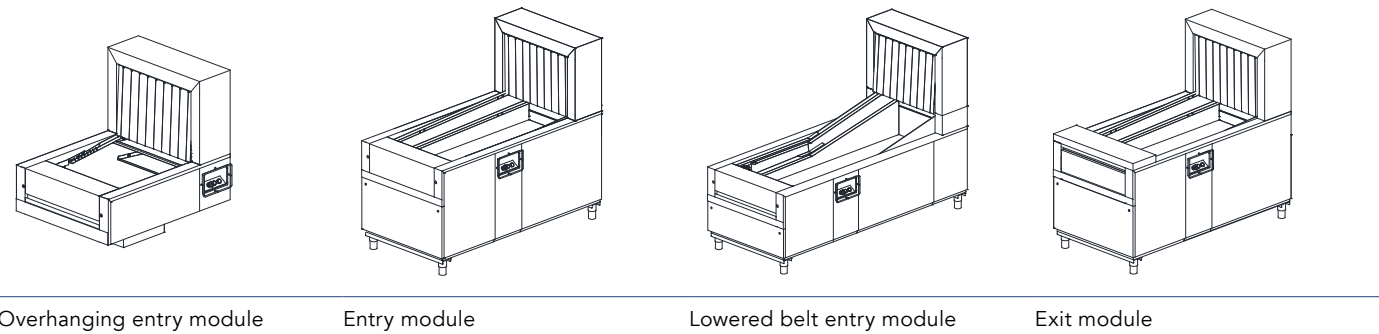
							
NZ3 + 300 mm Neutral zone	NZH6 + 600 mm Neutral zone with door for dryer	KDRF69 9 kW Shelf dryer	KDRF99M + 900 mm - 9 kW Dryer module	KDRF99MB + 900 mm - 15 kW Dryer module	KHRF10 Compact heat recovery	KHRF20 Heat recovery	KHRPF40 Heat recovery with heat pump
NZ6 + 600 mm Neutral zone with door		KDRF6V Steam heated shelf dryer	KDRF9VM + 900 mm Steam heated dryer module	KDRF9VMB + 900 mm Steam heated dryer module	KSCF10 Steam condenser		







OPTIONS

	MI900	MI1200	MIS1200	MI1800	MI2200	MIR2200		MI2700	MIR2700	EM900	EM1200	EM1800	EM2200	EM2700
Model	Entry mod. 900	Entry mod. 1200	Over. entry mod. 1200	Entry mod. 1800	Entry mod. 2200	Lowered belt entry mod. 2200	Model	Entry mod. 2700	Lowered belt entry mod. 2700	Exit mod. 900	Exit mod. 1200	Exit mod. 1800	Exit mod. 2200	Exit mod. 2700
QK 2460 - QK 2460 AS6	€	€	●	€	€	€	QK 2460 - QK 2460 AS6	€	€	□	□	●	€	€
QK 2460 V - QK 2460 AS6 V	€	€	●	€	€	€	QK 2460 V - QK 2460 AS6 V	€	€	□	□	●	€	€
QK 3760 - QK 3760 AS6	€	€	●	€	€	€	QK 3760 - QK 3760 AS6	€	€	□	□	●	€	€
QK 3760 V - QK 3760 AS6 V	€	€	●	€	€	€	QK 3760 V - QK 3760 AS6 V	€	€	□	□	●	€	€
QK 4160 - QK 4160 AS6	€	€	●	€	€	€	QK 4160 - QK 4160 AS6	€	€	□	□	●	€	€
QK 4160 V - QK 4160 AS6 V	€	€	●	€	€	€	QK 4160 V - QK 4160 AS6 V	€	€	□	□	●	€	€
QK 5360 - QK 5360 AS6	€	€	●	€	€	€	QK 5360 - QK 5360 AS6	€	€	□	□	●	€	€
QK 5360 V - QK 5360 AS6 V	€	€	●	€	€	€	QK 5360 V - QK 5360 AS6 V	€	€	□	□	●	€	€
QK 5960 - QK 5960 AS6	€	€	●	€	€	€	QK 5960 - QK 5960 AS6	€	€	□	□	●	€	€
QK 5960 V - QK 5960 AS6 V	€	€	●	€	€	€	QK 5960 V - QK 5960 AS6 V	€	€	□	□	●	€	€
QK 6760 - QK 6760 AS6	€	€	●	€	€	€	QK 6760 - QK 6760 AS6	€	€	□	□	□	●	€
QK 6760 V - QK 6760 AS6 V	€	€	●	€	€	€	QK 6760 V - QK 6760 AS6 V	€	€	□	□	□	●	€
QK 7760 - QK 7760 AS6	€	€	●	€	€	€	QK 7760 - QK 7760 AS6	€	€	□	□	□	●	€
QK 7760 V - QK 7760 AS6 V	€	€	●	€	€	€	QK 7760 V - QK 7760 AS6 V	€	€	□	□	□	●	€

- Standard
- Upon request
- Not available

Option compatibility to be confirmed by the manufacturer after verification



	Description	Capacity	Dimensions	Code	
	GLASS BASKET WITH GLASS SUPPORT AND ANTI-TIPPING LID		500x500x235 H	C 135	
	LARGE MESH BASKET	For glasses	500x500x105 H	C 44	
	HOLDER FOR GLASS SUPPORT	For glass support (C112-C113-C114)	500x500x50 H	C111	
	GLASS SUPPORT	5x5 Glass Ø 87 mm (C111)	500x500x50 H	C 112	
	GLASS SUPPORT	4x4 Glass Ø 110 mm (C111)	500x500x50 H	C 113	
	GLASS SUPPORT	6x6 Glass Ø 72 mm (C111)	500x500x50 H	C 114	
	CUTLERY BASKET		490x180x140 H	C 47	



Nowadays, kitchens, canteens and professionals of the sector are always looking for reliable and solid equipment with the best technology. In order to equip increasingly demanding customers, Kromo offers its cutting-edge QK PREMIUM range. The basis of its development is a constant search for the best components and advanced technology to provide a concrete solution to intense everyday work. Obviously, the goal of a professional dishwasher is to satisfy customers with deep-dish cleaning. Kromo knows that a clean plate, glass and cutlery are essential elements for the image conveyed to guests. Three consecutive rinsing phases at the perfect hygienic temperature meet all the most stringent washing

requirements. The development of the QK PREMIUM range has mainly focused on improving performance and consumption and placing it among the most coveted machines on the market. Let's not forget that Kromo's vision is to keep the use of environmental resources as low as possible. This is evidenced by our certification of the use of the renewable energies newly obtained and certain unique functions such as HDRF which make the machine energy self-sufficient and incredibly economically advantageous. The experience of communication with the machine is renewed thanks to the new CONNECTIVITY remote interaction system. Everything is under control in a twinkling!



FEATURES

STANDARD

- SMART DRIVE+ 10 speed advancement system
- 710 mm wide conveyor
- Plates belt
- TFT 5.7" display and soft touch keyboard
- Frequently used keys shortcut and menu language setting
- Constant monitoring of key operations
- IPX5 electronic board
- Alarms and events report
- Autotimer
- Break Tank system
- Centralized 1-DRAIN and automatic AD drain, with total or partial emptying of the tanks
- Wash arms ALL-IN-1
- Use economizer
- ECO-DET Detergent economizer
- Thermal and acoustic insulation of both the machine and tanks
- ACID PROOF Radial wash tanks in S/S AISI 316 inclined to provide complete drainage of the wash water
- S/S surface filters CLEAN+ to protect the wash tanks as well as the wash pump
- Double-skin, insulated and counterbalanced doors, equipped with anti-drop safety system
- THERMO BARRIER system for comfort in use
- Predisposition for Kromo rinse-aid and detergent dispensers connection
- ACID PROOF stainless steel boilers in AISI 316, fully insulated to reduce thermal loss.
- Vertical self-cleaning pumps
- Booster pump
- Reinforced triple rinse 3R+ : improved consumptions (reverse osmosis on request)
- CPF System: Controlled Pressure Flow
- Water, energy consumptions and working time control system
- Possible working modes for dryer unit: all off, only fan, half power 4,5 kW + fan, total power 9 kW + fan

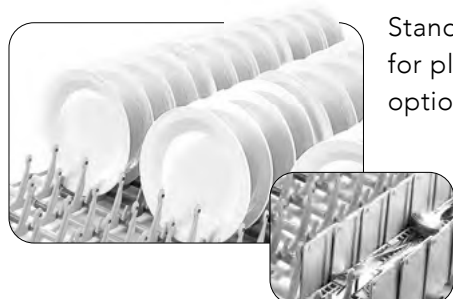


FEATURES

OPTIONS

- 5 different conveyor belts available, also with cutlery lane
- Double skin shelf or dryer module
- 2 models of steam condenser available
- 3 models of heat recovery to be chosen
- KHDRF: patented insulated linear system of dryer and heat recovery
- System available steam-heated. Self-cleaning of the heat exchanger included.
- AS6 automatic shower with EASY+ with filter system
- Dispensers kit with peristaltic pump, for detergent as well as rinse-aid
- CONNECTIVITY remote control compliant with the HACCP norms
- Delivery in 2 or more parts, to ease installation operations
- Automatic self-cleaning of the machine available, with dedicated booster pump on request
- Dedicated space for detergent and rinse-aid jugs
- S/S pumps
- Extra power in the boiler

STANDARD BELT



Standard belt for plates and optional cutlery lane

OPTIONAL BELT



Special belt for hospitals



Standard belt for glasses



Special belt for thermal trays



Standard belt for trays and utensils



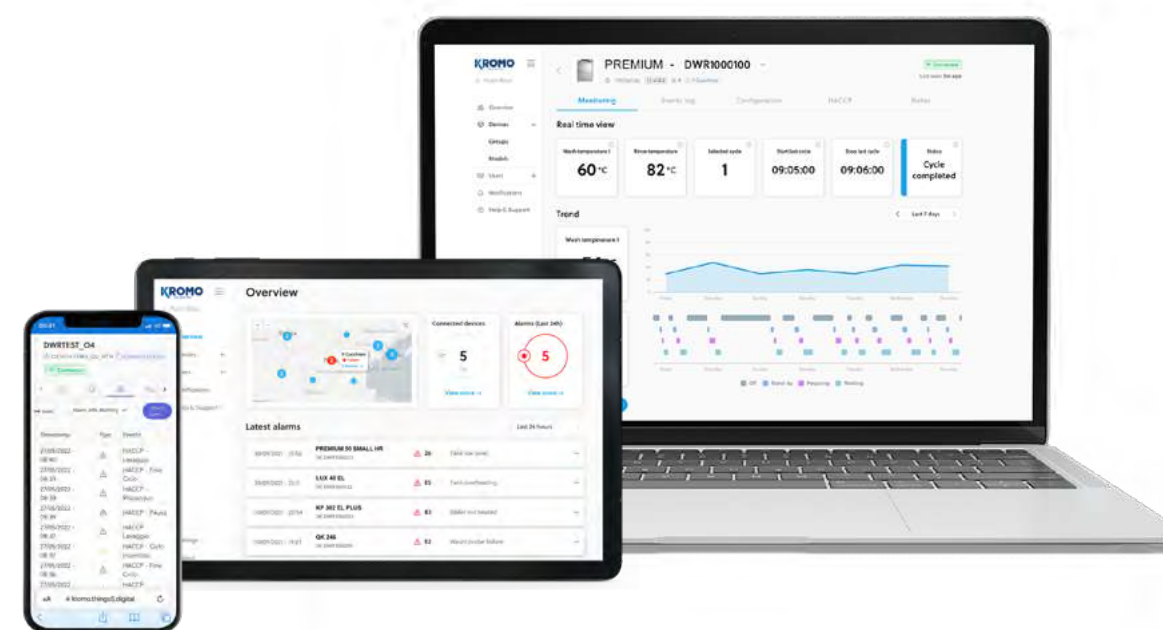
Special belt for in-flight catering

CONNECTIVITY 4.0

WHEREVER YOU ARE...

THE SITUATION JUST A CLICK AWAY

You will be constantly connected to the machine to monitor the work phases, any alarms and remotely configure the parameters according to your needs. Compliant with HACCP regulations.



View all the working parameters and historical events, working hours and any problems at any time.



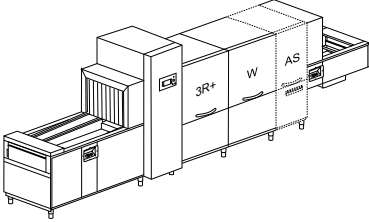
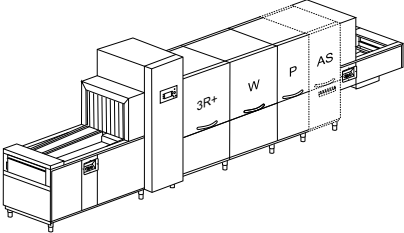
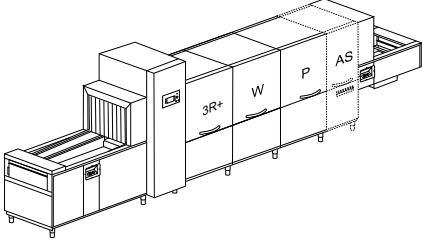
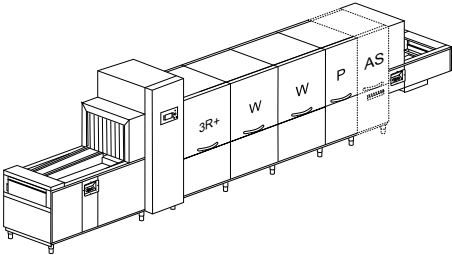
In case of problems, the machine promptly sends an email to you and to the technician who can intervene remotely to solve the problem or equip himself for on-site intervention.

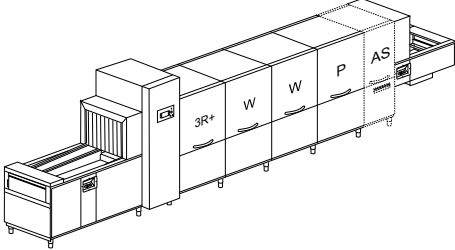
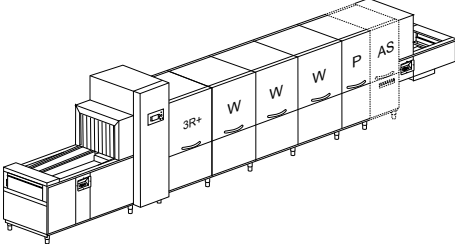
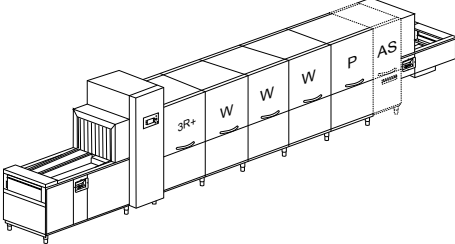


The program allows you to remove an Excel file with all Haccp data at any time.



Discounts are provided for the purchase of 4.0 devices. You will be able to recover 40% of the cost of the car. Request more information to find out more.

Model	Voltage	Capacity	Poids	Code	
QK 2500 <i>IMPROVED</i>					
	400 V 3N ~ 50 Hz 27,75 kW	 450 H		QK 2500	
		 710	5500x1110 2070/2200H 715 kg	QK 2500 AS6	
	400 V 3N ~ 50 Hz 3,25 kW 17 kg/h	1950/3690 dishes/h	AS6 +600 mm	QK 2500 V	
		2850* dishes/h		QK 2500 V AS6	
QK 3800 <i>IMPROVED</i>					
	400 V 3N ~ 50 Hz 30,2 kW	 450 H		QK 3800	
		 710	6100x1110 2070/2200H 850 kg	QK 3800 AS6	
	400 V 3N ~ 50 Hz 4,2 kW 20 kg/h	2400/4050 dishes/h	AS6 +600 mm	QK 3800 V	
		3660* dishes/h		QK 3800 V AS6	
QK 4200 <i>IMPROVED</i>					
	400 V 3N ~ 50 Hz 34,25 kW	 450 H		QK 4200	
		 710	6400x1110 2070/2200H 865 kg	QK 4200 AS6	
	400 V3N ~ 50 Hz 5,25 kW 25 kg/h	3000/4800 dishes/h	AS6 +600 mm	QK 4200 V	
		4200* dishes/h		QK 4200 V AS6	
QK 5400 <i>IMPROVED</i>					
	400 V3N ~ 50 Hz 50,2 kW	 450 H		QK 5400	
		 710	7000x1110 2070/2200H 1000 kg	QK 5400 AS6	
	400 V 3N ~ 50 Hz 6,2 kW 29 kg/h	4200/6450 dishes/h	AS6 +600 mm	QK 5400 V	
		5100* dishes/h		QK 5400 V AS6	

Model	Voltage	Capacity	Poids	Code	
QK 6000 <i>IMPROVED</i>					
	400 V 3N ~ 50 Hz 51,25 kW	 450 H		QK 6000	
		 710	7300x1110x2070/2200H 1015 kg	QK 6000 AS6	
	400 V 3N ~ 50 Hz 7,25 kW 29 kg/h	4350/6750 dishes/h	AS6 +600 mm	QK 6000 V	
		5550* dishes/h		QK 6000 V AS6	
QK 6800 <i>IMPROVED</i>					
	400 V 3N ~ 50 Hz 70,2 kW	 450 H		QK 6800	
		 710	8300x1110x2070/2200H 1150 kg	QK 6800 AS6	
	400 V 3N ~ 50 Hz 8,2 39 kg/h	5250/8100 dishes/h	AS6 +600 mm	QK 6800 V	
		6450* dishes/h		QK 6800 V AS6	
QK 7800 <i>IMPROVED</i>					
	400 V 3N ~ 50 Hz 74,25 kW	 450 H		QK 7800	
		 710	8600x1110x2070/2200H 1165 kg	QK 7800 AS6	
	400 V 3N ~ 50 Hz 9,25 kW 44 kg/h	5850/9000 dishes/h	AS6 +600 mm	QK 7800 V	
		6900* dishes/h		QK 7800 V AS6	

- P** Prewash
W Wash
3R Double pre-rinse + rinse on module
K10 Corner prewash
AS6 Automatic shower with filter drawer +600 mm
V Steam-heated
***** Productivity according to DIN SPEC 10534 (contact time)
EAC label upon request
Option compatibility to be confirmed by the manufacturer after verification

OPTIONS

AUTOTIMER									PAP-SAN								
PRE DOS									DWI								
DDE-GROUP									DWI / T								
DOS/S									CONNECTIVITY								
SAN									XP								
PAP									DRIVE								
Model	220-240 V 3 50 Hz	380-415 V 3N 50 Hz	60 Hz	Autotimer	Kromo disp. connections	Dispensers kit	Dispenser with probe	Sanitization	Model	Booster pump sanitization	Thermoacoustic insulation	Tanks insulation	CONNECTIVITY (HACCP)	Extra power	Booster pump	Smart drive	
QK 2500	+ 2%	●	+ 3%	●	●	€	€	€	QK 2500	€	●	●	€	€	●	●	
QK 2500 AS6	+ 2%	●	+ 3%	●	●	€	€	€	QK 2500 AS6	€	●	●	€	€	●	●	
QK 2500 V	+ 1%	●	+ 3%	●	●	€	€	€	QK 2500 V	€	●	●	€	□	●	●	
QK 2500 V AS6	+ 1%	●	+ 3%	●	●	€	€	€	QK 2500 V AS6	€	●	●	€	□	●	●	
QK 3800	+ 2%	●	+ 3%	●	●	€	€	€	QK 3800	€	●	●	€	€	●	●	
QK 3800 AS6	+ 2%	●	+ 3%	●	●	€	€	€	QK 3800 AS6	●	●	●	€	€	●	●	
QK 3800 V	+ 1%	●	+ 3%	●	●	€	€	€	QK 3800 V	€	●	●	€	□	●	●	
QK 3800 V AS6	+ 1%	●	+ 3%	●	●	€	€	€	QK 3800 V AS6	●	●	●	€	□	●	●	
QK 4200	+ 2%	●	+ 3%	●	●	€	€	€	QK 4200	€	●	●	€	€	●	●	
QK 4200 AS6	+ 2%	●	+ 3%	●	●	€	€	€	QK 4200 AS6	●	●	●	€	€	●	●	
QK 4200 V	+ 1%	●	+ 3%	●	●	€	€	€	QK 4200 V	€	●	●	€	□	●	●	
QK 4200 V AS6	+ 1%	●	+ 3%	●	●	€	€	€	QK 4200 V AS6	●	●	●	€	□	●	●	
QK 5400	+ 2%	●	+ 3%	●	●	€	€	€	QK 5400	●	●	●	€	€	●	●	
QK 5400 AS6	+ 2%	●	+ 3%	●	●	€	€	€	QK 5400 AS6	●	●	●	€	€	●	●	
QK 5400 V	+ 1%	●	+ 3%	●	●	€	€	€	QK 5400 V	●	●	●	€	€	●	●	
QK 5400 V AS6	+ 1%	●	+ 3%	●	●	€	€	€	QK 5400 V AS6	●	●	●	€	€	●	●	
QK 6000	+ 2%	●	+ 3%	●	●	€	€	€	QK 6000	●	●	●	€	€	●	●	
QK 6000 AS6	+ 2%	●	+ 3%	●	●	€	€	€	QK 6000 AS6	●	●	●	€	€	●	●	
QK 6000 V	+ 1%	●	+ 3%	●	●	€	€	€	QK 6000 V	●	●	●	€	€	●	●	
QK 6000 V AS6	+ 1%	●	+ 3%	●	●	€	€	€	QK 6000 V AS6	●	●	●	€	€	●	●	
QK 6800	+ 2%	●	+ 3%	●	●	€	€	€	QK 6800	●	●	●	€	€	●	●	
QK 6800 AS6	+ 2%	●	+ 3%	●	●	€	€	€	QK 6800 AS6	●	●	●	€	€	●	●	
QK 6800 V	+ 1%	●	+ 3%	●	●	€	€	€	QK 6800 V	●	●	●	€	€	●	●	
QK 6800 V AS6	+ 1%	●	+ 3%	●	●	€	€	€	QK 6800 V AS6	●	●	●	€	€	●	●	
QK 7800	+ 2%	●	+ 3%	●	●	€	€	€	QK 7800	●	●	●	€	€	●	●	
QK 7800 AS6	+ 2%	●	+ 3%	●	●	€	€	€	QK 7800 AS6	●	●	●	€	€	●	●	
QK 7800 V	+ 1%	●	+ 3%	●	●	€	€	€	QK 7800 V	●	●	●	€	□	●	●	
QK 7800 V AS6	+ 1%	●	+ 3%	●	●	€	€	€	QK 7800 V AS6	●	●	●	€	□	●	●	

- Standard
- Upon request

DDE-GROUP Both detergent (with probe) and rinse-aid dispensers included

DWI Insulation option for the tunnel only, dryer excluded. Shelf dryer can be double skin upon request

Peak-cut connect upon request

Warm water supply 55 °C

We recommend to install the machine in a well-ventilated room, with a properly sized steam exhausting system.

CONNECTIVITY Includes HACCP option. 10-year plan

XP In case of cold water supply for rinse (8-55 °C) and without any heat recovery, the extra power option is mandatory.
In case of cold water supply for rinse (8-15 °C), we recommend the heat recovery option.

Option compatibility to be confirmed by the manufacturer after verification

OPTIONS

																PI	1-DRAIN		AD		ECO-DET	X-BELT	LANE	DIV	BT	DVGW
Model	10 speeds	Master switch	Surface filters	Peak-cut for Kromo dosing	Estimated consumption readout	S/S pumps	Centralized drain	Model	Automatic drain	Chemicals saving system	Special belt	Cutlery lane	Price per division	Break tank	DVGW											
QK 2500	●	●	●	●	●	€	●	QK 2500	●	●	+ 7 %	----	€	●	€											
QK 2500 AS6	●	●	●	●	●	€	●	QK 2500 AS6	●	●	+ 7 %	----	€	●	€											
QK 2500 V	●	●	●	●	●	€	●	QK 2500 V	●	●	+ 7 %	----	€	●	€											
QK 2500 V AS6	●	●	●	●	●	€	●	QK 2500 V AS6	●	●	+ 7 %	----	€	●	€											
QK 3800	●	●	●	●	●	€	●	QK 3800	●	●	+ 7 %	----	€	●	€											
QK 3800 AS6	●	●	●	●	●	€	●	QK 3800 AS6	●	●	+ 7 %	----	€	●	€											
QK 3800 V	●	●	●	●	●	€	●	QK 3800 V	●	●	+ 7 %	----	€	●	€											
QK 3800 V AS6	●	●	●	●	●	€	●	QK 3800 V AS6	●	●	+ 7 %	----	€	●	€											
QK 4200	●	●	●	●	●	€	●	QK 4200	●	●	+ 7 %	+ 5 %	€	●	€											
QK 4200 AS6	●	●	●	●	●	€	●	QK 4200 AS6	●	●	+ 7 %	----	€	●	€											
QK 4200 V	●	●	●	●	●	€	●	QK 4200 V	●	●	+ 7 %	+ 5 %	€	●	€											
QK 4200 V AS6	●	●	●	●	●	€	●	QK 4200 V AS6	●	●	+ 7 %	----	€	●	€											
QK 5400	●	●	●	●	●	€	●	QK 5400	●	●	+ 7 %	----	€	●	€											
QK 5400 AS6	●	●	●	●	●	€	●	QK 5400 AS6	●	●	+ 7 %	----	€	●	€											
QK 5400 V	●	●	●	●	●	€	●	QK 5400 V	●	●	+ 7 %	----	€	●	€											
QK 5400 V AS6	●	●	●	●	●	€	●	QK 5400 V AS6	●	●	+ 7 %	----	€	●	€											
QK 6000	●	●	●	●	●	€	●	QK 6000	●	●	+ 7 %	+ 5 %	€	●	€											
QK 6000 AS6	●	●	●	●	●	€	●	QK 6000 AS6	●	●	+ 7 %	----	€	●	€											
QK 6000 V	●	●	●	●	●	€	●	QK 6000 V	●	●	+ 7 %	+ 5 %	€	●	€											
QK 6000 V AS6	●	●	●	●	●	€	●	QK 6000 V AS6	●	●	+ 7 %	----	€	●	€											
QK 6800	●	●	●	●	●	€	●	QK 6800	●	●	+ 7 %	----	€	●	€											
QK 6800 AS6	●	●	●	●	●	€	●	QK 6800 AS6	●	●	+ 7 %	----	€	●	€											
QK 6800 V	●	●	●	●	●	€	●	QK 6800 V	●	●	+ 7 %	----	€	●	€											
QK 6800 V AS6	●	●	●	●	●	€	●	QK 6800 V AS6	●	●	+ 7 %	----	€	●	€											
QK 7800	●	●	●	●	●	€	●	QK 7800	●	●	+ 7 %	+ 5 %	€	●	€											
QK 7800 AS6	●	●	●	●	●	€	●	QK 7800 AS6	●	●	+ 7 %	----	€	●	€											
QK 7800 V	●	●	●	●	●	€	●	QK 7800 V	●	●	+ 7 %	+ 5 %	€	●	€											
QK 7800 V AS6	●	●	●	●	●	€	●	QK 7800 V AS6	●	●	+ 7 %	----	€	●	€											

● Standard
---- Not available

LANE Only with KDRF69 and KDRF6V
DIV Compulsory for machines > 4,5 m length
BT Booster pump included
DVGW Not available with heat recovery and steam condenser
Components prescribed by DVGW on request (check option compatibility with the manufacturer)

Option compatibility to be confirmed by the manufacturer after verification

OPTIONS

	NZ3	NZ6	NZH6	KDRF68	KDRF69	KDRF6V	KDRF99M	KDRF9VM	KDRF99MB	KDRF9VMB			KSCF10	KSCF15	KHRF15	KHRF20	KHRPF40	3R+	STOCK	KHDRF	KHDRFV
Modello	Neutral zone 300	Neutral zone 600	Neutral zone for dryer 600	Shelf dryer	Shelf dryer	Steam-heated shelf dryer	Module dryer	Steam-heated dryer module	Dryer module with blowers	Steam-heated dryer module with blowers	Modello		Steam condenser	Steam condenser	Heat recovery	Heat recovery	Heat recovery	Triple rinse	Chemicals compartment	Heat recovery	Heat recovery
QK 2500 - QK 2500 AS6	€	€	€	€		----	€	----	€	----	QK 2500 - QK 2500 AS6		€	€	€	€	€	●	€	€	----
QK 2500 V - QK 2500 V AS6	€	€	€	€	€	€	€	€	€	€	QK 2500 V - QK 2500 V AS6		€	€	€	€	€	●	€	----	€
QK 3800 - QK 3800 AS6	€	€	€	€		----	€	----	€	----	QK 3800 - QK 3800 AS6		€	€	€	€	€	●	€	€	----
QK 3800 V - QK 3800 V AS6	€	€	€	€	€	€	€	€	€	€	QK 3800 V - QK 3800 V AS6		€	€	€	€	€	●	€	----	€
QK 4200 - QK 4200 AS6	€	€	€	€		----	€	----	€	----	QK 4200 - QK 4200 AS6		€	€	€	€	€	●	€	€	----
QK 4200 V - QK 4200 V AS6	€	€	€	€	€	€	€	€	€	€	QK 4200 V - QK 4200 V AS6		€	€	€	€	€	●	€	----	€
QK 5400 - QK 5400 AS6	€	€	€	€		----	€	----	€	----	QK 5400 - QK 5400 AS6		€	€	€	€	€	●	€	€	----
QK 5400 V - QK 5400 V AS6	€	€	€	€	€	€	€	€	€	€	QK 5400 V - QK 5400 V AS6		€	€	€	€	€	●	€	----	€
QK 6000 - QK 6000 AS6	€	€	€	€		----	€	----	€	----	QK 6000 - QK 6000 AS6		€	€	€	€	€	●	€	€	----
QK 6000 V - QK 6000 V AS6	€	€	€	€	€	€	€	€	€	€	QK 6000 V - QK 6000 V AS6		€	€	€	€	€	●	€	----	€
QK 6800 - QK 6800 AS6	€	€	€	€		----	€	----	€	----	QK 6800 - QK 6800 AS6		€	€	€	€	€	●	€	€	----
QK 6800 V - QK 6800 V AS6	€	€	€	€	€	€	€	€	€	€	QK 6800 V - QK 6800 V AS6		€	€	€	€	€	●	€	----	€
QK 7800 - QK 7800 AS6	€	€	€	€		----	€	----	€	----	QK 7800 - QK 7800 AS6		€	€	€	€	€	●	€	€	----
QK 7800 V - QK 7800 V AS6	€	€	€	€	€	€	€	€	€	€	QK 7800 V - QK 7800 V AS6		€	€	€	€	€	●	€	----	€

---- Not available

NZ3 Recommended with big quantities of trays to wash

NZ6 Recommended with big quantities of trays to wash. Module equipped with a front door

NZH6 Recommended with dryers with blowers

KDRF99M - KDRF9VM - KDRF99MB Module with front door







KSCF15 Not available with dryer






3R+ Reinforced triple rinse: Improved consumptions (Reverse osmosis on request).
With osmotic water supply osmotic water supply and electrical conductivity lower than 200 microsiemens, it is mandatory to install a stainless steel heat exchanger

KHRF15 - KHRF20 - KHRPF40 - KHDRF - KHDRFV In case of cold water supply for rinse (8-15 °C), we recommend to install the heat recovery system optional

All dryers are double skin

Option compatibility to be confirmed by the manufacturer after verification

					
NZ3 + 300 mm Neutral zone	NZH6 + 600 mm Neutral zone with door for dryer	KDRF68 9 kW Shelf dryer	KDRF69 9 kW Shelf dryer	KDRF99M + 900 mm - 9 kW Dryer module	KDRF99MB + 900 mm - 15 kW Dryer module
NZ6 + 600 mm Neutral zone with door			KDRF6V Steam heated shelf dryer	KDRF9VM + 900 mm Steam heated dryer module	KDRF9VMB + 900 mm Steam heated dryer module

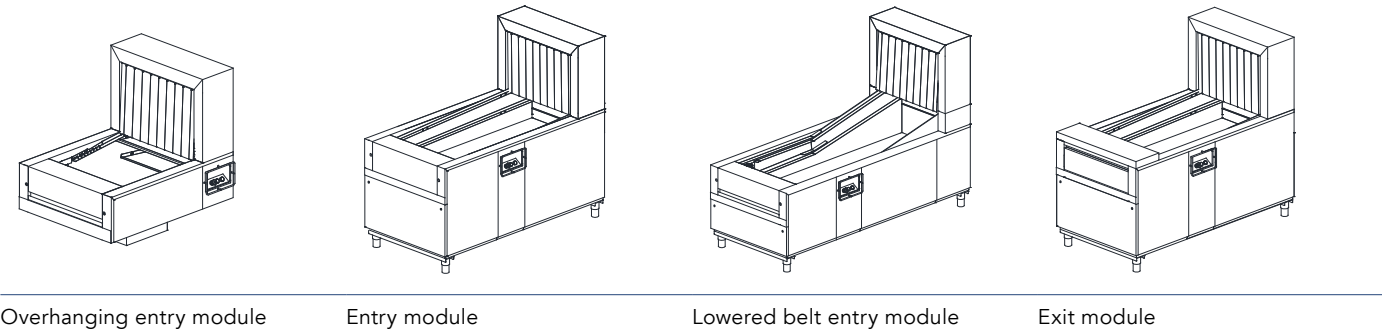
				
KSCF10 Steam condenser	KHRF15 Reinforced compact heat recovery	KHRF20 Heat recovery	KHRPF40 Heat recovery with heat pump	KHDRF Electric dryer 9 kW + heat recovery
	KSCF15 Reinforced steam condenser			KHDRFV Steam heated dryer + heat recovery







OPTIONS

	MI900	MI1200	MIS1200	MI1800	MI2200	MIR2200		MI2700	MIR2700	EM900	EM1200	EM1800	EM2200	EM2700
Model	Entry mod. 900	Entry mod. 1200	Over. entry mod. 1200	Entry mod. 1800	Entry mod. 2200	Lowered belt entry mod. 2200	Model	Entry mod. 2700	Lowered belt entry mod. 2700	Exit mod. 900	Exit mod. 1200	Exit mod. 1800	Exit mod. 2200	Exit mod. 2700
QK 2500 - QK 2500 AS6	€	€	●	€	€	€	QK 2500 - QK 2500 AS6	€	€	□	□	●	€	€
QK 2500 V - QK 2500 V AS6	€	€	●	€	€	€	QK 2500 V - QK 2500 V AS6	€	€	□	□	●	€	€
QK 3800 - QK 3800 AS6	€	€	●	€	€	€	QK 3800 - QK 3800 AS6	€	€	□	□	●	€	€
QK 3800 V - QK 3800 V AS6	€	€	●	€	€	€	QK 3800 V - QK 3800 V AS6	€	€	□	□	●	€	€
QK 4200 - QK 4200 AS6	€	€	●	€	€	€	QK 4200 - QK 4200 AS6	€	€	□	□	●	€	€
QK 4200 V - QK 4200 V AS6	€	€	●	€	€	€	QK 4200 V - QK 4200 V AS6	€	€	□	□	●	€	€
QK 5400 - QK 5400 AS6	€	€	●	€	€	€	QK 5400 - QK 5400 AS6	€	€	□	□	●	€	€
QK 5400 V - QK 5400 V AS6	€	€	●	€	€	€	QK 5400 V - QK 5400 V AS6	€	€	□	□	●	€	€
QK 6000 - QK 6000 AS6	€	€	●	€	€	€	QK 6000 - QK 6000 AS6	€	€	□	□	●	€	€
QK 6000 V - QK 6000 V AS6	€	€	●	€	€	€	QK 6000 V - QK 6000 V AS6	€	€	□	□	●	€	€
QK 6800 - QK 6800 AS6	€	€	●	€	€	€	QK 6800 - QK 6800 AS6	€	€	□	□	□	●	€
QK 6800 V - QK 6800 V AS6	€	€	●	€	€	€	QK 6800 V - QK 6800 V AS6	€	€	□	□	□	●	€
QK 7800 - QK 7800 AS6	€	€	●	€	€	€	QK 7800 - QK 7800 AS6	€	€	□	□	□	●	€
QK 7800 V - QK 7800 V AS6	€	€	●	€	€	€	QK 7800 V - QK 7800 V AS6	€	€	□	□	□	●	€

- Standard
- Upon request
- Not available

Option compatibility to be confirmed by the manufacturer after verification



	Description	Capacity	Dimensions	Code	
	GLASS BASKET WITH GLASS SUPPORT AND ANTI-TIPPING LID		500x500x235 H	C 135	
	LARGE MESH BASKET	For glasses	500x500x105 H	C 44	
	HOLDER FOR GLASS SUPPORT	For glass support (C112-C113-C114)	500x500x50 H	C111	
	GLASS SUPPORT	5x5 Glass Ø 87 mm (C111)	500x500x50 H	C 112	
	GLASS SUPPORT	4x4 Glass Ø 110 mm (C111)	500x500x50 H	C 113	
	GLASS SUPPORT	6x6 Glass Ø 72 mm (C111)	500x500x50 H	C 114	
	CUTLERY BASKET		490x180x140 H	C 47	



Le récupérateur thermique standard utilise les vapeurs produites par la machine pour préchauffer l'eau froide du réseau d'alimentation tout en garantissant une économie d'énergie immédiate. Les cordes spéciales du système d'entraînement, inclinées et divisées par zone, évitent la contami-

nation entre les modules et facilitent le séchage à froid à haute pression. Grâce aux turbosoufflantes et aux "lames d'air" sur mesure, la technologie KROMO permet d'obtenir des résultats parfaits et la réutilisation immédiate des plateaux

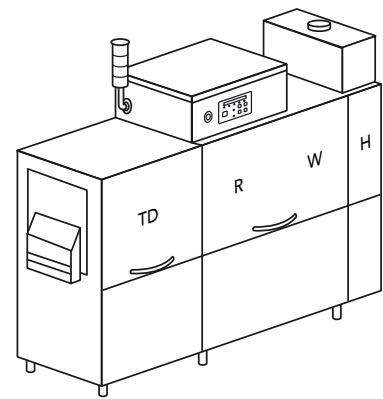


SELF-CLEANING

The machine's cleaning and sanitization is one of the most dreaded tasks to accomplish at the end of a day at work in the kitchen. For this reason, we have conceived a sanitization system which ensures a thorough and immediate cleaning of all machine's surfaces thanks to the special rinse arms installed on the upper wall, thus offering the perfect solution to meet maximum hygiene requirements. A dedicated sanitization product is combined with a booster pump ensuring the right water pressure: the result will be a spick and span dishwasher!

FEATURES

- Low voltage electronic control panel
- Fast coupling wash-arms, with concave self cleaning nozzles, equipped with flow adjuster
- ACID PROOF AISI 316 wash tanks, with rounded corners to guarantee a perfect hygiene
- The overflow pipe enables the full draining of the wash tanks without removal
- ACID PROOF AISI 316 stainless steel boilers, fully insulated to reduce thermal losses
- Standard heat recovery
- Double skin insulated doors, counter-balanced, equipped with anti-drop safety system
- THERMO BARRIER system for comfort in use
- CLEAN+ filters
- Built-in turbo blowers feed the air nozzles positioned both above and below the twin-cords
- Turbo-blowers. Thanks to a high pressure of the air vortex
- Trays accumulator in the absence of trolley
- Advancement system. Eases the removal of any solid residual on the tray allowing its complete rinse
- Two speeds traction system with built-in clutch. Speed adjuster on request
- Non-return valve
- Autotimer: built-in device that switches the electrical options
- HACCP: data management software on request


Model	Voltage	Capacity	Poids	Code	
TK 1600					
	400 V 3N ~ 50 Hz 44 kW 8,4 - 13,1 m/min Cold water supply	 530x325x35 H	2575x805 2040/2120 H 485 kg	TK 1600	

- W
- Wash
- R
- Rinse
- TD
- Cold dryer with turbo blowers
- H
- Heat recovery

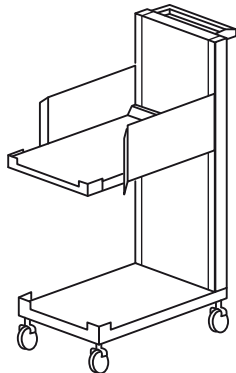
OPTIONS

DDE-GROUP									DOS/S	PAP	DRIVE	DWI			HACCP	PI	AUTOTIMER	KHR5	KHRP40	SAN	PAP-SAN	BT
Model	220-240 V 3 50 Hz	380-415 V 3N 50 Hz	60 Hz	Trays Accumulator	Dispensers Kit	Dispenser with Probe	Booster Pump	Smart drive	Model	Thermoacoustic insulation	HACCP supervisor	s/s Pumps	Autotimer	Heat recovery	Heat recovery with heat pump	Sanitiza- tion	Booster Pump Sanitization	Break Tank				
TK 1600	€	●	+3%	●	€	€	€	€	TK 1600	€	€	€	●	●	€	€	€	€				

-
- Standard
- DDE-GROUP
- Both detergent (with probe) and rinse aid dispensers included
- DOS/S
- Only for detergent dispenser
- DRIVE
- Check voltage compatibility



KHRP40
Heat recovery with heat pump

Model	Capacity	Poids	Code	
TL 100				
	 530x325x35 H	800x500x900 H 30 kg	TL 100	

- KHR5
- Heat recovery (cold water supply 8-15 °C)
- DWI
- Insulation option for the tunnel only, dryer excluded. Recommended with the standard heat recovery KHR5 and with the KHRP40
- HACCP
- Software and cables included
- KHRP40
- In alternative to standard compact heat recovery
- BT
- Booster pump included

Division not available

Option compatibility to be confirmed by the manufacturer after verification

We recommend to install the machine in a well ventilated room, with a properly sized steam exhausting system

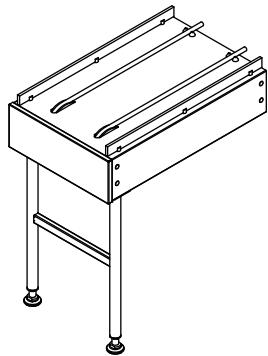
EAC label upon request




Our customized bi-cord transport system is the perfect solution not only to carry, but also to wash and deliver trays. The system limits the workers operations and contains management costs and space while perfectly drying the trays for an immediate use.

With the recent expansion of the range, KROMO now offers tailor-made logistics and waste treatment solutions. Thanks to this comprehensive offer, even the most specific customer needs can be satisfied.

Model	Voltage	Capacity	Code	€
CORD CONVEYOR				



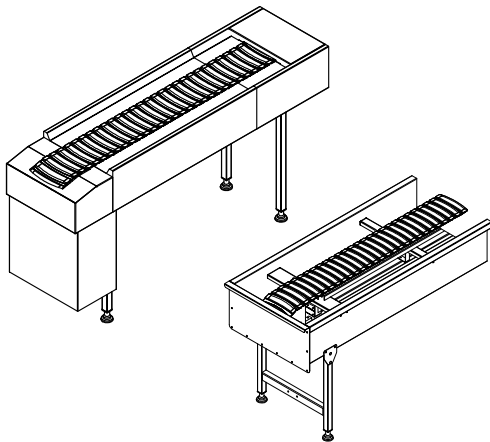
400 V 3N 50 Hz
--
230 V 50 Hz
--
230 V 3 50 Hz
Special voltages
on request




BCC

upon request

SLAT CONVEYOR FOR TRAYS OR RACKS



400 V 3N 50 Hz
--
230 V 50 Hz
--
230 V 3 50 Hz
Special voltages
on request



SCT
trays

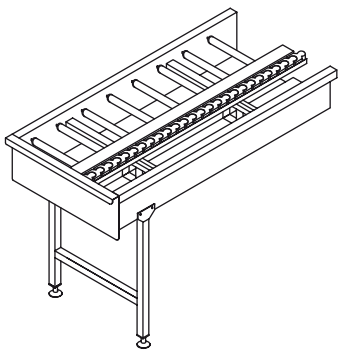
upon request



SCR
racks

upon request

CARDAN CHAIN CONVEYOR



400 V 3N 50 Hz
--
230 V 50 Hz
--
230 V 3 50 Hz
Special voltages
on request



CCC

upon request



The technology of the POT line will lead you in an easy and intuitive way, through the functions of your POT washer, directly from the control panel. The TFT color display (KP 152 EL Plus / KP 202 EL / KP 302 EL / KP 402 EL PLUS) eases the visualization of the working temperatures and the set wash cycles, both easily modifiable. With the new motorized valve implemented on the KP 202 EL, KP 302 EL and KP 402 EL PLUS, together with the possibility of scheduling the start of the cycle, we greatly facilitated the use and maintenance of

these models.

The two-level self-diagnosis system, also present on the KP 152 EL PLUS, allows you to any anomaly very accurately. Besides, the optimized Optimal Rinse rinsing system, the additional Energy Saving function, the high-level performance and high quality of our materials, the competitiveness and versatility of our POT range reach levels that are hard to find on the market.



FEATURES KP 76 EL - KP 86 EL PLUS

- Four wash cycles (customizable for KP 76 EL)
- Soft Start wash pump (KP 76 EL)
- New intuitive electronic control panel (KP 76 EL)
- High capacity in small dimensions
- Versatility of use
- Double skin
- Deep-formed tank
- Triple pump filter (KP 76 EL)
- Trays (600x400 mm with 90° angle) and EURONORM crates 600x400x400H (with specific griddle 575010)
- Automatic self-cleaning cycle
- PLUS system for a constant rinse (KP 86 EL PLUS)
- Built-in water softener available with automatic regeneration cycle (KP 76 EL)
- CONNECTIVITY remote control compliant with the HACCP norms (on request for KP 76 EL)

FEATURES KP 136 EL PLUS

- Easy and intuitive LED electronic control panel
- Modification of the dosage of detergent and rinse-aid directly on the on the control panel
- Remote control panel available on request instead of the standard control panel
- Four customizable programs
- Single skin hood
- Double tank filters, with dirt collection system and pump filter (improved system for a better filtration of the wash water)
- Self-cleaning vertical pump
- Soft Start wash pump
- Easy to access for maintenance
- Anti-drop roof panel
- Easily removable basket support
- Self-cleaning cycle
- The Plus system grants a constant rinse temperature and pressure thanks to the rinse pump
- CONNECTIVITY remote control compliant with the HACCP norms (on request)





FEATURES KP 151 EL

- LED control panel with four programmable cycles
- Max loading 805 mm
- Double skin door
- Deep-formed tank
- Double tank filter + pump filter
- Standard rinse pump
- Anti-drop roof panel
- Self-cleaning automatic cycle
- Basket 550x665
- Stainless steel wash and rinse arms



NEW ELECTRONIC CONTROL PANEL

- LED electronic control panel
- Intuitive START button with multi-color backlight for quick viewing of machine status
- Display of wash and rinse temperatures, cycle progress, selected cycle, machine status (stand-by, end of cycle, etc.) and main warnings description (door opening, drainage, etc.)
- Language selection not available
- 4 programmable cycles (2 - 4 - 6 - 8 minutes)
- Possibility to install the Connectivity-Cloud option

With the warewashing models KP 152 EL HR / KP 202 EL HR / KP 302 EL HR / KP 402 EL HR PLUS, KROMO offers significant energy savings.

The HR system is a heat exchanger: the moist warm water vapour is directly drawn out of the machine when the door is closed, and used for pre-heating the cold water inlet up to around 50 °C. As a result, the energy required to reach the final rinse temperature (approximately 85 °C) is dramatically reduced. Depending on the model,

you can save between 3,5 kWh and 5,5 kWh. Kromo HR technology improves the room air quality and climate as well.

The heat exchanger reduces the exhaust air temperature by more than half.

The entire humidity volume is cut down by approximately 20% of the equivalent machine without any heat recovery unit. This permanently improves the operators' comfort.



FEATURES KP 152 EL PLUS - KP 202 EL PLUS - KP 302 EL PLUS - KP 402 EL PLUS

- Electronic with energy saving system
- Double skin
- Standard rinse pump
- Self cleaning vertical pump
- Deep-formed chair tank
- Stainless steel independent wash/rinse arms
- Double tank filter with dirt collection system
- Thermostop to grant the rinse temperature according to HACCP regulations
- Multichromatic START key
- Automatic self-cleaning cycle
- Four wash cycles customizable
- The wash pump activate one after the other to reduce the electric peak (KP 202 EL / KP 302 EL / KP 402 EL PLUS)
- Double skin door that can be used as a countertop
- Innovative drain valve system (KP 202 EL / KP 302 EL / KP 402 EL) for automatized drain
- 5" TFT touch display
- Optional heat recovery (HR)
- CONNECTIVITY remote control compliant with the HACCP norms (on request)

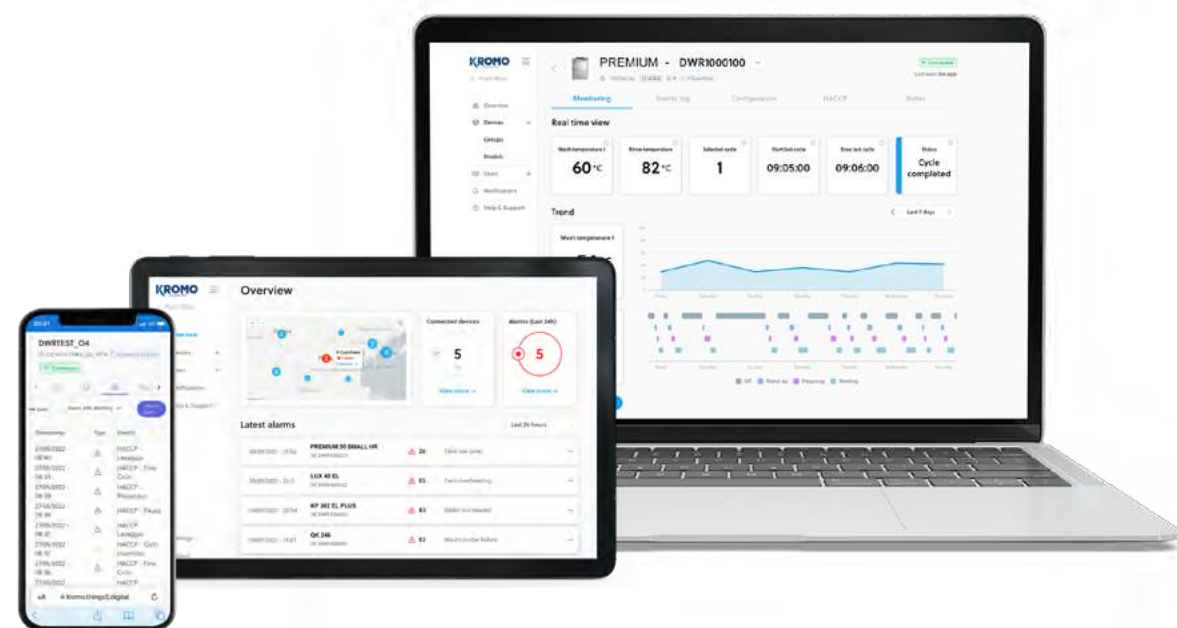
CONNECTIVITY 4.0

WHEREVER YOU ARE...

THE SITUATION JUST A CLICK AWAY

You will be constantly connected to the machine to monitor the work phases, any alarms and remotely configure the parameters according to your needs.

Compliant with HACCP regulations.



STEAM
RECOVERY



ENERGY
SAVINGS



SUSTAINABILITY



HR:

HEAT RECOVERY SYSTEM

With the Kromo warewashing models KP 152 EL HR / KP 202 EL HR / KP 302 EL HR / KP 402 EL HR PLUS, Kromo up to 50% of energy costs can be saved!

The HR system is an heat exchanger: the moist warm water vapour is drawn directly out of the machine when the door is closed, and used for pre-heating the cold water supplied up to around 50°C. As a result, the energy required to reach the final rinse temperature (approx. 85°C) is dramatically reduced.

Depending on the model you can save between 3,5kWh and 5,5kWh.

Kromo HR technology improves the room's air quality and climate as well. The heat exchanger reduces the exhaust air temperature by more than an half.

The entire humidity volume is cut down by approx.-20% of the equivalent machine without a heat recovery unit. This permanently improves the operators' comfort.



View all the working parameters and historical events, working hours and any problems at any time.



In case of problems, the machine promptly sends an email to you and to the technician who can intervene remotely to solve the problem or equip himself for on-site intervention.



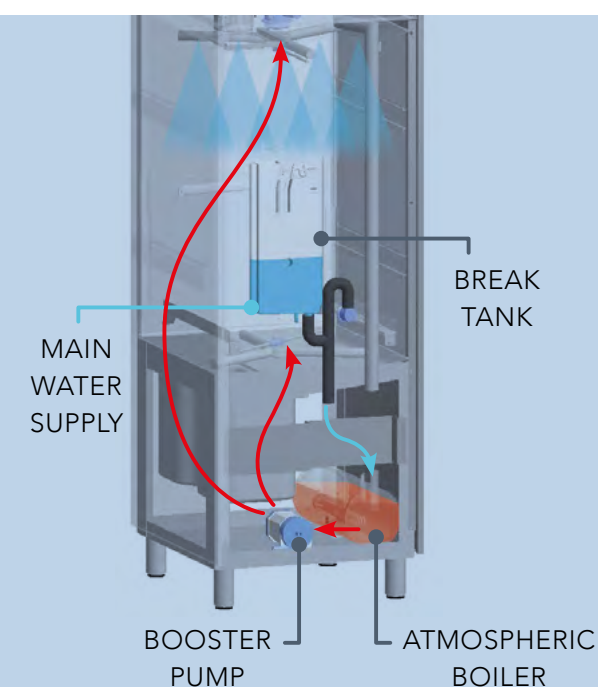
The program allows you to remove an Excel file with all Haccp data at any time.








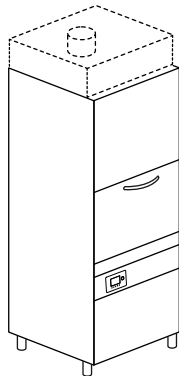
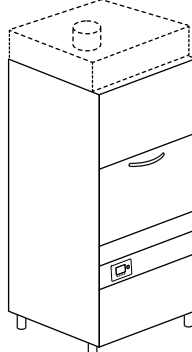
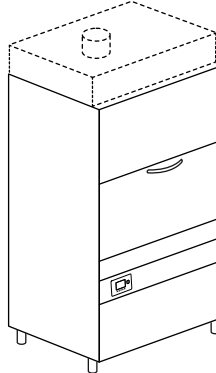
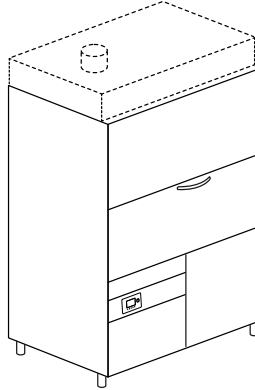
Our Connectivity system is a revolutionary device limiting and facilitating the eventual intervention of a technician who can anticipate the necessary parts to be replaced, saving time and money.

PLUS SYSTEM

The rinse cycle is stabilized at 85°C temperature and flows at a constant pressure, thanks to the atmospheric boiler which avoids to add fresh water from the mains, when rinsing. Moreover the PLUS System grants a better control and a correct dosage of rinse-aid at every cycle.



Model		Voltage	Capacity	Dimensions	Code
KP 76 EL					
	4 PROGRAMS	Multivoltage:	 400 H	600x680x850 H 68 kg	KP 76 EL KP 76 EL DA surface filters
		Standard	 Ø 400	600x400x25 H	
		400 V 3N 50 Hz 6,7 kW	 600x400x400 H		
		or 230 V 3 50 Hz 6,7 kW	 500x500		
KP 86 EL PLUS					
	4 PROGRAMS	400 V 3N ~ 50 Hz 10,2 kW	 440 H	600x700x1380 H 100 kg	KP 86 EL PLUS
			 500x500	600x400x25 H	
			 500x610		
KP 136 EL PLUS					
	4 PROGRAMS	400 V 3N ~ 50 Hz 10,49 kW	 Ø 410	720X735X1445/1915 H 104 kg	KP 136 EL PLUS KP 136 EL PLUS DA KP 136 EL PLUS HR KP 136 EL PLUS HR DA
			 500x600	600x400x25 H (HT tables)	
KP 136 EL PLUS LIFT					
	4 PROGRAMS	400 V 3N ~ 50 Hz 10,49 kW	 Ø 410	720X735X1445/1915 H 104 kg	KP 136 EL PLUS LIFT KP 136 EL PLUS LIFT DA KP 136 EL PLUS HR LIFT KP 136 EL PLUS HR LIFT DA
			 500x600	600x400x25 H (HT tables)	
KP 151 EL					
	4 PROGRAMS	400 V 3N ~ 50 Hz 8,2 kW	 805 H	650x750x1690/2070 H 110 kg	KP 151 EL
			 550x665		

Model	Voltage	Capacity	Dimensions	Code				
KP 152 EL PLUS								
	4 PROGRAMS - HR: HEAT RECOVERY	400 V 3N ~ 50 Hz 8,2 kW		690x800x1890/2275 H 155 kg	KP 152 EL PLUS			
						690x800x2165/2275 H 165 kg	KP 152 EL HR PLUS	
								
KP 202 EL PLUS								
	4 PROGRAMS - HR: HEAT RECOVERY	400 V 3N ~ 50 Hz 12,5 kW		840x885x1790/2050 H 199 kg	KP 202 EL PLUS			
						840x885x2140 H 215 kg	KP 202 EL HR PLUS	
								
KP 302 EL PLUS								
	4 PROGRAMS - HR: HEAT RECOVERY	400 V 3N ~ 50 Hz 13,4 kW		990x885x1790/2050 H 221 kg	KP 302 EL PLUS			
						990x885x2140 H 237 kg	KP 302 EL HR PLUS	
								
KP 402 EL PLUS								
	4 PROGRAMS - HR: HEAT RECOVERY	400 V 3N ~ 50 Hz 14,8 kW		1490x885x1970/2310 H 320 kg	KP 402 EL PLUS			
		400 V 3N ~ 50 Hz 5,8 kW 25 kg/h		1490x885x2320 H 343 kg	KP 402 EL HR PLUS			
				1490x885x1970/2310 H 320 kg	KP 402 EL V PLUS			
						1350x725		
		1490x885x2320 H 343 kg	KP 402 EL V HR PLUS					

OPTIONS

											XP	PS	SA												DDE	DB	DBE	HACCP	CONNECTIVITY	BT	WRAS	DVGW	PAP	PI	FLOAT
Model	220-240 V 50 Hz	380-415 V 3N 50 Hz	220-240V 3 50 Hz	380-415 V 3 50 Hz	60 Hz	440V 3 60Hz	Extra Power	Drain Pump	Automatized Drain	Remote control panel		Model	Deter- gent Dispen- ser	Rinse-Aid Dispenser	Peristaltic Rinse-Aid Disp.	HACCP Supervisor	CONNECTIVITY (HACCP)	Break Tank	Wrass	DVGW	Booster Pump	S/S Pumps	Probes Lack Det / rinse aid												
KP 76 EL	M	●	M	----	€	----	----	€	----	----		KP 76 EL	€	●	€	----	€	€	€	€	€	----	€												
KP 76 EL DA	M	●	M	----	€	----	----	€	----	----		KP 76 EL DA	€	●	€	----	€	----	€	€	€	----	€												
KP 86 EL PLUS	€	●	□	----	€	----	€	€	----	----		KP 86 EL PLUS	€	----	●	€	----	●	€	€	●	----	€												
KP 136 EL PLUS*	----	●	□	€	€	€	€	€	----	€		KP 136 EL PLUS*	€	----	●	----	€	●	€	€	●	----	€												
KP 136 EL PLUS DA	----	●	□	€	€	€	€	€	----	€		KP 136 EL PLUS DA	€	----	●	----	€	----	----	----	●	----	€												
KP 136 EL PLUS HR	----	●	□	€	€	€	€	€	----	€		KP 136 EL PLUS HR	€	----	●	----	€	●	----	----	●	----	€												
KP 136 EL PLUS HR DA	----	●	□	€	€	€	€	€	----	€		KP 136 EL PLUS HR DA	€	----	●	----	€	----	----	----	●	----	€												
KP 136 EL PLUS LIFT	----	●	□	€	€	€	€	€	----	€		KP 136 EL PLUS LIFT	€	----	●	----	€	●	€	€	●	----	€												
KP 136 EL PLUS LIFT DA	----	●	□	€	€	€	€	€	----	€		KP 136 EL PLUS LIFT DA	€	----	●	----	€	----	----	----	●	----	€												
KP 136 EL PLUS HR LIFT	----	●	□	€	€	€	€	€	----	€		KP 136 EL PLUS HR LIFT	€	----	●	----	€	●	----	----	●	----	€												
KP 136 EL PLUS HR LIFT DA	----	●	□	€	€	€	€	€	----	€		KP 136 EL PLUS HR LIFT DA	€	----	●	----	€	----	----	----	●	----	€												
KP 151 EL*	----	●	□	€	€	----	€	€	----	----		KP 151 EL*	€	●	€	----	€	----	----	----	●	----	€												
KP 152 EL PLUS	----	●	□	€	€	----	€	€	----	----		KP 152 EL PLUS	€	----	●	----	€	●	€	€	●	----	€												
KP 152 EL HR PLUS	----	●	□	€	€	----	€	€	----	----		KP 152 EL HR PLUS	€	----	●	----	€	●	----	----	●	----	€												
KP 202 EL PLUS	----	●	□	€	€	----	€	€	●	----		KP 202 EL PLUS	€	----	●	----	€	●	€	€	●	€	€												
KP 202 EL HR PLUS	----	●	□	€	€	----	€	€	●	----		KP 202 EL HR PLUS	€	----	●	----	€	●	----	----	●	€	€												
KP 302 EL PLUS	----	●	□	€	€	----	€	€	●	----		KP 302 EL PLUS	€	----	●	----	€	●	€	€	●	€	€												
KP 302 EL HR PLUS	----	●	□	€	€	----	€	€	●	----		KP 302 EL HR PLUS	€	----	●	----	€	●	----	----	●	€	€												
KP 402 EL PLUS	----	●	□	€	€	----	€	€	●	----		KP 402 EL PLUS	€	----	●	----	€	●	€	€	●	----	€												
KP 402 EL HR PLUS	----	●	□	€	€	----	€	€	●	----		KP 402 EL HR PLUS	€	----	●	----	€	●	----	----	●	----	€												
KP 402 EL V PLUS	----	●	□	€	€	----	----	€	●	----		KP 402 EL V PLUS	€	----	●	----	€	----	----	----	●	----	€												
KP 402 EL V HR PLUS	----	●	□	€	€	----	----	€	●	----		KP 402 EL V HR PLUS	€	----	●	----	€	----	----	----	●	----	€												

- Standard
- Upon request
- Not available
- M

Multivoltage
- DA

Built-in automatic water softener
- V

Steam heated
- *

All models are equipped with double skin, except KP 136 EL Plus and KP 151 EL
- PLUS

Rinse with constant temperature and stabilized consumption
- Water supply 55 °C
- EAC label upon request
- Option compatibility to be confirmed by the manufacturer after verification
- HACCP

Software and cabled included
- 220-240 V 50 HZ

For KP 86 EL Plus max boiler heating element 6000 W

PS

Not available with 380-415 V 3 50 Hz and 440 V 60 Hz

PI

Available with 50 Hz frequency only

XP

In case of cold water supply for rinse (8-55 °C) and without any heat recovery , the extra power option is mandatory. +3000 W with standard voltage only, for other three-phase please contact us. In case of cold water supply for rinse (8-15 °C), we recommend the heat recovery option

WRAS - DVGW

Booster pump included. KP 76 EL S machine depth + 20 mm

DVGW








Components prescribed by DVGW on request (check option compatibility with the manufacturer)





CONNECTIVITY

Includes HACCP option. 10-year plan

HR

Heat recovery (in case of cold water supply 8-15 °C)
The ENERGY RECOVERY SYSTEM uses the heat produced by the machine to preheat the infeed of cold rinse water supply 8-15 °C
Optimal air temperature in the dishwashing area thanks to the reduction of the steam and the humidity produced by the machine
HR available in case of osmotic water supply if the electrical conductivity is higher than 200 microsiemens

	Description	Capacity	Dimensions	Code	
	LARGE MESH BASKET	For glasses	500x500x105 H	C 44	
	GLASS BASKET WITH GLASS SUPPORT AND ANTI-TIPPING LID	KP 76 EL KP 86 EL PLUS	500x500x235 H	C 135	
	GRIDDLES Basket holder 2 pcs	KP 76 EL KP 86 EL PLUS	500x500x380 H	575005/P	
	GRIDDLES	KP 76 EL - KP 86 EL PLUS	500x500	575010	
		KP 151 EL - KP 152 EL	550x550	C 100	
	STAINLESS STEEL BASKETS	KP 86 EL PLUS	500x610x75 H	C 132	
		KP 151 EL - KP 152 EL	550x665x75 H	C 87/B	
		KP 202 EL	700x700x130 H	91100	
		KP 302 EL	850x725x130 H	92100	
		KP 402 EL	1350x725x130 H	93600	
	TRAY SUPPORTS 6 pcs max. depth 25 mm	KP 76 EL - KP 86 EL PLUS	500x500x160 H	575005	
		KP 136 EL PLUS	500x605x160 H	11600054	
	TRAY SUPPORTS 8 pcs max. depth 25 mm	KP 151 EL KP 152 EL KP 202 EL KP 302 EL KP 402 EL	300x465x210 H	C 97/A	
	TRAY SUPPORTS 4 pcs - GN 1/1 max. depth 65 mm			C 97/B	

	Description	Capacity	Dimensions	Code	
	SPATULA BASKET		150x150x250 H	C 86/A	
			220x220x420 H	C 85/A	
	WATER SOFTENER	12 l	Ø 200x500 H	DEP 12	
	AUTOMATIC WATER SOFTENER	12 l (max 800 l)	315x510x685 H	DEP 12-AUT	
	STAINLESS STEEL STAND	KP 76 EL	592x535x500 H	999900517	



Why waste your time with soak and prewash when there are plenty of more useful things to be done in the kitchen? Consider giving a value to wasted hours and the amount of water and detergent used to moisten encrusted pans. Plus the time and effort to scrub, wash and dry them! The conclusion is easily deduced; it's a waste of time, energy and resources. A waste of money. This is when the KROMO GRANULE Utensil Washers enter the

scene. The abrasive power of the projected GRANULE, mixed together with water and detergent, guarantee an excellent result in a few minutes wash. Even with the most tenaciously encrusted pans. A precious and necessary equipment designed to fulfil the needs of canteens, caterers, airports and restaurants' modern kitchens, giving the right value to time and money.



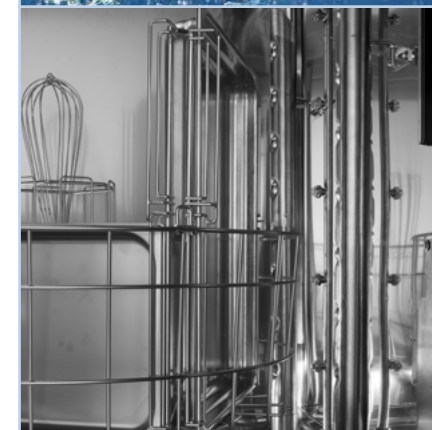
⚙️ Encrusted pots and pans are often a problem. They require soaking and manual cleaning therefore a waste of time and resources only for this particular task.



💧 The combined action of water, detergent and GRANULE blasted at high pressure ensures considerable time and energy savings, as well as chemicals, water and electricity. All in favour of our environment.

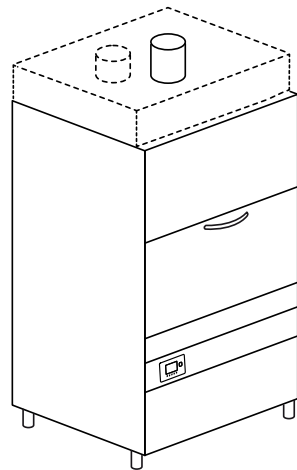
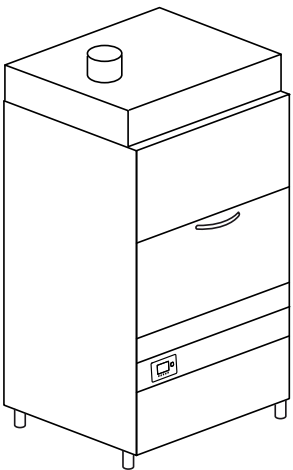


✳️ Excellent results against the most stubborn dirt. Moreover, the speedy cycles allow a quick re-use of the kitchenware. The Staff that was previously employed to soak and hand wash, will now be free to perform other tasks.



FEATURES

- The washing system is covered by an International Dual Patent
- Twelve wash cycles, six of which combine water detergent and GRANULE
- Soft-touch panel with multicolour key
- Functional LCD Display for a constant control of all operations
- Multi language control panel
- Double-wall body, fully insulated with high performance thermo-acoustic material
- AISI 316 body and impeller, high performance wash-pump
- Wash-tank in S/S with guaranteed homogeneous thickness
- Double, vertical easy-fit wash-arms, with concave nozzles to prevent clogs and to optimize the combined flow of water and GRANULE
- All electric and electronic components are sheltered in a dedicated box, for easy access from the machine's front
- The is placed on a rotating support stand, to optimise the mechanical action of the GRANULE on the surfaces to wash
- GRANULE collection strainer, with right-level mark for GRANULE
- The resistant lower part of the door becomes a perfect working surface, simplifying the load/unload operations
- The optional service trolley facilitates the loading/unloading of the machine, increasing the operation speed and, consequently, the machine's productivity
- Heat recovery unit, to optimize energy resources and cut down on steam and wamodule







Model	Voltage	Capacity	Poids	Code	Model	Voltage	Capacity	Poids	Code
GR 300 PLUS	12 PROGRAMS				GR 800 HR PLUS	12 PROGRAMS			
	400 V 3N ~ 50 Hz 13 kW	6xGN 1/1 (cycle with GRANULE)	1095x910 1910/2020 H 303 kg	GR 300 PLUS		400 V 3N ~ 50 Hz 13 kW	8xGN 1/1 GN 1/1	1200x1010 2260/2305 H 350 kg	GR 800 HR PLUS
		10xGN 1/1 (cycle w/o GRANULE)					530x325xmax65 H		
		GN 1/1					-----		
		530x325xmax65 H					4xGN 2/1 GN 2/1		
		-----					650x530xmax140 H		
		2xGN 2/1 GN 2/1	1095x910x2100 H 320 kg	GR 300 HR PLUS			-----		
		650x530xmax140 H					3XEN		
		-----					800x600x20 H		
		4XEN					800x600x50 H		
		600x400x20 H					-----		
		600x400x50 H					Ø30 max 60 H		
		-----					Ø40 max 60 H		
		Ø30 max 50 H					Ø50 max 50 H		
		Ø40 max 45 H							
		Ø50 max 35 H							






OPTIONS

									XP	PS	DBE					DDE	PAP	BT	WRAS	DVGW	FLOAT	DWI	PI
Model	220-240 V 50 Hz	380-415 V 3N 50 Hz	220-240 V 3 50 Hz	380-415 V 3 50 Hz	60 Hz	Extra Power	Drain Pump	Peristaltic Rinse-Aid Disp.	Model	Detergent Dispenser	Booster Pump	Break Tank	Wras	DVGW	Probes Lack Det / rinse aid	Thermo- acoustic insulation	S/S Pumps						
GR 300 PLUS	----	●	□	€	€	€	----	●	GR 300 PLUS	€	●	●	€	€	€	●	●						
GR 300 HR PLUS	----	●	□	€	€	€	----	●	GR 300 HR PLUS	€	●	●	----	----	€	●	●						
GR 800 HR PLUS	----	●	□	€	€	€	----	●	GR 800 HR PLUS	€	●	●	----	----	€	●	●						

- Standard
 - Not available
 - Upon request
 - XP In case of cold water supply for rinse (8-55 °C) and without any heat recovery , the extra power option is mandatory. +3000 W with standard voltage only, for other voltages please contact us. In case of cold water supply for rinse (8-15 °C), we recommend the heat recovery option
- Water supply 55 °C
- EAC label upon request
- Compatibilità di ogni opzione da confermare previa verifica del produttore

- BT - WRAS - DVGW Booster pump included
- DVGW Components prescribed by DVGW on request (check option compatibility with the manufacturer)
- HR Heat recovery (in case of cold water supply 8-15 °C)
The ENERGY RECOVERY SYSTEM uses the heat produced by the machine to preheat the infeed of cold rinse water supply (8-15 °C)
Optimal air temperature in the dishwashing area thanks to the reduction of the steam and the humidity produced by the machine
HR available in case of osmotic water supply if the electrical conductivity is higher than 200 microsiemens

	Description	Capacity	Dimensions	Code	
	ROUND BASKET	Std. equipment for GR 300 6 pz GN 1/1 o 2 pz GN 2/1	Ø735 x 240 H	96101	
	STAND FOR TRAYS	Std. equipment for GR 300 10 pz GN 1/1 GASTRONORM max 40 mm		96135	
	STAND FOR TINS	Std. equipment for GR 300 4 pz 600x400x20 H 4 pz 600x400x50 H EURONORM		96136	
	ROUND BASKET	Std. equipment for GR 800 8 pz GN 1/1 or 4 pz GN 2/1	Ø850 x 350 H	96601	
	HOLDER	Std. equipment for GR 800	4 pcs (96602) GN 1/1, 2/1 1 pcs (96604) GN 1/1, 2/3, 1/2, 1/3	96602 96604	
	STAND FOR TINS	Std. equipment for GR 800 3 pz 800x600x20 H 3 pz 800x600x50 H EURONORM	600x600x900H 15 kg	96603	

	Description	Capacity	Dimensions	Code	
	HOLDER	Standard equipment for GR 300 GR 800 Stand for 96103 and pots stand		96102	
	BASKET	Standard equipment for GR 300 GR 800 Spatulas basket		96103	
	HOLDER	Standard equipment for GR 300 GR 800 Stand for small pots and frying pans		96104	
	HOLDER	Standard equipment for GR 300 GR 800 Stand for big pots		96105	
	BASKET LIFTER	Standard equipment for GR 300 GR 800 Trolley to easily lift the basket		96605	
	SERVICE TROLLEY	Option equipment for GR 300 GR 800	600x600x900H 15 kg	TROLLEY	
	GRANULE	Standard equipment for GR 300 GR 800 Bucket 12 l	280x280x290H (9 kg)	96100	








VK models are conceived to wash a large quantity of crates and containers of any kind. They represent the ideal solution for bakeries, pastries and for the general food industry, which require a seamless flow of clean containers. Thanks to all available versions and to the possibility to get personalized configurations, any kind of dirt can be removed. Several options are available, to provide the best fit into the wash area and minimize the need of efforts and labor.

The VK line is designed to provide, mainly in the bakery sector, stunning results at low running costs, allowing remarkable savings under each aspect of its usage. The range is composed of 9 models, all suitable for the general food-industry who needs to wash and sanitize a large number of crates every day. Versatility is one of the most prominent advantages of this line, combined with easy operations and absolute cleanness, according to the strictest hygiene prescriptions.



FEATURES

- Electrical or steam-heated VK 2310, VK 3010 and VK 4010
- Middle-rail system, perfect to wash crates of any width. In addition, our VK 2310 + KP23, VK 3010 + KP23 and VK 4010 + KP23 models are equipped with an innovative top-down loading system allowing a "one-person-only" operation
- Two operating speeds
- Double-wall body in stainless steel AISI 304
- ACID PROOF radial wash tanks and boilers in s/s AISI 316; fully insulated boilers to minimize thermal loss
- Self-cleaning vertical wash pumps, protected from electrical overloads
- Double-skin doors with THERMO BARRIER device, insulated and counterbalanced, equipped with anti-fall safety device.
- CLEAN+ surface filters in stainless steel
- Easily removable wash and rinse arms in stainless steel
- S/S adjustable feet
- Inlet chute and splash-guard modules at both ends
- Anti-contamination curtains
- Consumptions economizers
- Electronic panel with IPX5 membrane keyboard, ensuring a constant monitoring of operating parameters
- Autotimer, switching off the rack conveyor motor and all electrical devices after a pre-set lapse of inactivity
- Centralized drain 1-DRAIN for VK 2310 and VK 2810 models

Model	Voltage	Capacity	Dimensions	Code	
VK 2310					
	400 V 3N ~ 50 Hz 30 kW	 510x500 H	2600x805x1830/2120 H 270 kg	VK 2310	
	400 V 3N ~ 50 Hz 2,4 kW 45 kg/h	1,5-2,0 m/min		VK 2310 V	
VK 2310 + KP23					
Upper loading system					
	400 V 3N ~ 50 Hz 30 kW	 510x500 H 1,5-2,0 m/min	2710x805x2075/2120 H 280 kg	VK 2310 + KP23	
VK 2810					
	400 V 3N ~ 50 Hz 33 kW	 510x800 H 1,5-2,0 m/min	2800x805x2130/2720 H 310 kg	VK 2810	
VK 3010 - VK 4010					
	400 V 3N ~ 50 Hz 37 kW 3,7 kW - 54 kg/h	 510x500 H 2,0-2,6 m/min (VK 3010) 2,6-4,0 m/min (VK 4010)	4100x805x1830/2120 H 455 kg	VK 3010	
				VK 3010 V	
	400 V 3N ~ 50 Hz 41 kW 4,6 kW - 59 kg/h			VK 4010	
				VK 4010 V	
VK 3010 + KP23 - VK 4010 + KP23					
Upper loading system					
	400 V 3N ~ 50 Hz 37 kW	 510x500 H 2,0-2,6 m/min (VK 3010) 2,6-4,0 m/min (VK 4010)	4210x805x2075/2120 H 505 kg	VK 3010 + KP23	
	400 V 3N ~ 50 Hz 41 kW			VK 4010 + KP23	

Model	Voltage	Capacity	Dimensions	Code	
VK 2510					
For non-perforated crates	400 V 3N ~ 50 Hz 30 kW	 510x500 H 1,5-2,0 m/min	3200x805x1830/2120 H 270 kg	VK 2510	
VK 3510					
For non-perforated crates	400 V 3N ~ 50 Hz 37 kW	 510x500 H 2,0-2,6 m/min	4700x805x1830/2120 H 455 kg	VK 3510	

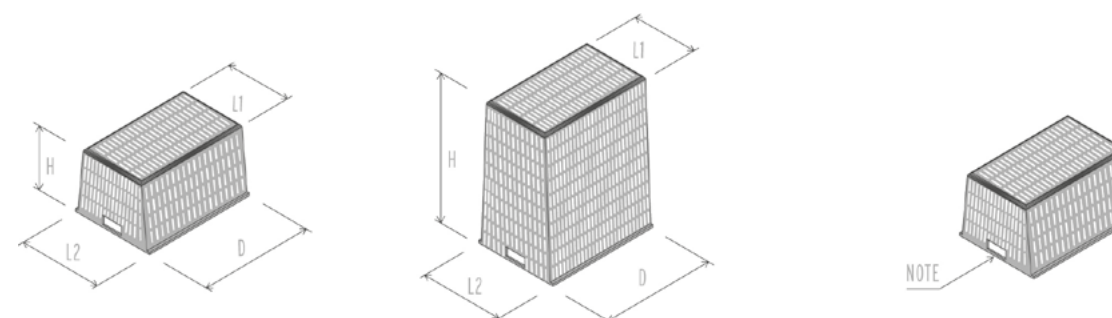
W Wash
R Rinse
N Neutral zone
RPW Reinforced prewash
V Steam heated

EAC label upon request

Option compatibility to be confirmed by the manufacturer after verification

	H max	min < L1 < max	min < L2 < max	Depth max
VK 2310 - VK 3010 - VK 4010	500	400< L1 <510	400*< L2 <510	600
VK 3010 - VK 4010 + DRYER	500	400< L1 <510	400*< L2 <510	600
VK 2810	800	400< L1 <510	400*< L2 <510	600
VK 2310 + KP23 - VK 3010 + KP23 - VK 4010 + KP23	500	400< L1 <470	400*< L2 <510	600
VK 2510 - VK 351	500	400< L1 <510	400*< L2 <510	600

* Verify with the manufacturer



NOTE: Should you need to wash baskets with non-standard handles or dimensions, please contact our technical department

OPTIONS

		XP	DDE-GROUP	PI	DRIVE	AUTOTIMER			DOS/S	PAP	DIV	1-DRAIN	DWI	BT	DVGW
Model	220-240 V 3 50 Hz	60 Hz	Extra Power	Dispensers kit	S/S pumps	Smart drive	Autotimer	Model	Dispenser with probe	Booster pump	Price per division	Centralized drain	Thermoacoustic insulation	Break Tank	DVGW
VK 2310	€	+ 3%	€	€	€	€	●	VK 2310	€	€	€	●	€	€	€
VK 2310 V	€	+ 3%	----	€	€	€	●	VK 2310 V	€	€	€	●	€	€	€
VK 2310 + KP23	€	+ 3%	€	€	€	€	●	VK 2310 + KP23	€	€	€	●	€	€	€
VK 2810	€	+ 3%	€	€	€	€	●	VK 2810	€	€	€	●	€	€	€
VK 3010	€	+ 3%	€	€	€	€	●	VK 3010	€	€	€	€	€	€	€
VK 3010 V	€	+ 3%	----	€	€	€	●	VK 3010 V	€	€	€	€	€	€	€
VK 3010 + KP23	€	+ 3%	€	€	€	€	●	VK 3010 + KP23	€	€	€	€	€	€	€
VK 4010	€	+ 3%	€	€	€	€	●	VK 4010	€	€	€	€	€	€	€
VK 4010 V	€	+ 3%	----	€	€	€	●	VK 4010 V	€	€	€	€	€	€	€
VK 4010 + KP23	€	+ 3%	€	€	€	€	●	VK 4010 + KP23	€	€	€	€	€	€	€
VK 2510	€	+ 3%	€	€	€	€	●	VK 2510	€	€	€	●	€	€	€
VK 3510	€	+ 3%	€	€	€	€	●	VK 3510	€	€	€	€	€	€	€

● Standard

---- Not available

DDE-GROUP Both detergent (with probe) and rinse-aid dispensers included

PI Available with 50 Hz frequency only

DRIVE Check voltage compatibility

Warm water supply 55 °C

We recommend to install the machine in a well ventilated room, with a properly sized steam exhausting system

Option compatibility to be confirmed by the manufacturer after verification

DOS/S For detergent dispenser only

DWI Insulation option for the tunnel only, dryer excluded. Recommended with KHR10 – KHR20 – KHRP40

BT Booster pump included

DVGW Not available with heat recovery and steam condenser
Components prescribed by DVGW on request (check option compatibility with the manufacturer)

+ KP23 Upper sliding support for crates with maximum width 475 mm

OPTIONS

KDR94		KDR99	KDR9V	KTB94	KTB99	KTB9V	KDR54		KDR59	KSC10	KHR10	KHR20	KHRP40
Model	Dryer + 700 mm / 4,5 kW	Dryer + 700 mm / 9 kW	Steam dryer + 700 mm	Dryer on module with blowers	Dryer on module with blowers	Steam dryer on module with blowers	Model	Dryer 4,5 kW	Dryer 9 kW	Steam Condenser	Heat Recovery	Heat Recovery	Heat Recovery
VK 2310	€	€	----	€	€	----	VK 2310	----	----	€	€	----	----
VK 2310 V	----	----	€	----	----	€	VK 2310 V	----	----	€	€	----	----
VK 2310 + KP23	----	----	----	----	----	----	VK 2310 + KP23	----	----	----	----	----	----
VK 2810	----	----	----	----	----	----	VK 2810	€	€	€	€	----	----
VK 3010	€	€	----	€	€	----	VK 3010	----	----	€	€	€	€
VK 3010 V	----	----	€	----	----	€	VK 3010 V	----	----	€	€	€	€
VK 3010 + KP23	----	----	----	----	----	----	VK 3010 + KP23	----	----	----	----	----	----
VK 4010	€	€	----	€	€	----	VK 4010	----	----	€	€	€	€
VK 4010 V	----	----	€	----	----	€	VK 4010 V	----	----	€	€	€	€
VK 4010 + KP23	----	----	----	----	----	----	VK 4010 + KP23	----	----	----	----	----	----
VK 2510	€	€	----	€	€	----	VK 2510	----	----	€	€	----	----
VK 3510	€	€	----	€	€	----	VK 3510	----	----	€	€	€	€

- Standard
- Not available

ALL DRYERS Ask the producer for effectiveness on drying results according to the basket to wash. The insulation of the dryers is not available

KDR94 With VK 3010, VK 4010 and VK 3510 HD, optional not ideal, verify with manufacturer

With osmotic water supply and electrical conductivity lower than 200 microsiemens, it is mandatory to install a stainless steel heat exchanger

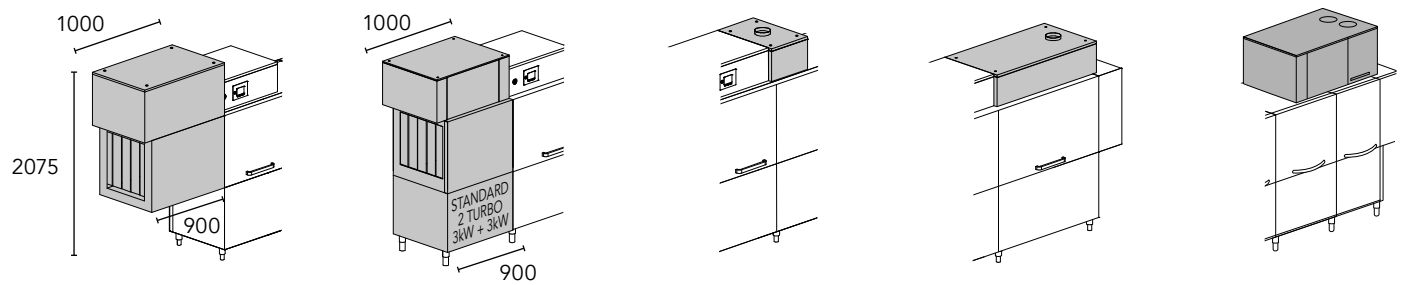
Option compatibility to be confirmed by the manufacturer after verification

KHR10 - KHR20 - KHRP40 XP


In case of cold water supply for rinse (8-15 °C), we recommend to install the heat recovery system option

In case of cold water supply for rinse (8-55 °C) and without any heat recovery, the extra power option is mandatory. In case of cold water supply for rinse (8-15 °C), we recommend the heat recovery option.





We strongly recommend the presence of a roller table with end microswitch at the exit of our rack conveyor machines for a correct operation



KDR94 4,5 kW KDR99 9 kW Dryer	KTB94 11,6 kW KTB99 16,1 kW Dryer on modulewith blowers	KSC10 Steam condenser KHR10 Compact heat recovery	KHR20 Heat recovery	KHRP40 Heat recovery with heat pump
KDR9V Steam heated dryer	KTB9V 7,1 Kw Steam heated dryer on module with blowers			



KDR54 4,5 kW KDR59 9 kW Dryer

	Description	Capacity	Dimensions	Code	
	TABLE + SINK	Sink 500x400x270 H	1200x730x860 H	K 55	
	TABLE + SINK	Sink 500x400x270 H	1500x730x860 H	K 8	
		Standard rubber ring	1800x730x860 H	K 9	
	ROLLER TABLE + SINK right or left version	Sink 500x400x270 H	1600x730x860 H	K 195	
	LINEAR ROLLER TABLE WITH TANK		1100x650x860 H	K 19*	
			1600x650x860 H	K 19/B*	
			2100x650x860 H	K 19/C*	
		Option end microswitch		K 18	

* Wooden cage +2% minimum + €
Special dimensions for tables upon request
We strongly recommend the presence of a roller table with end microswitch at the exit of our rack conveyor machines for a correct operation



Kromo conveyor crate-washers are the perfect answer for all those sectors in the food industry dealing with heavy workloads on a daily basis: large bakeries and pastry shops, meat or fish industry, catering services, commercial kitchens, airport facilities.

Our LK and LK-HD lines have been designed to offer our clients a comprehensive solution, tailored to their needs and work habits.

Our conveyor crate-washers line offers the possibility to choose among six highly customizable models, which however maintain some of the distinctive features of the Kromo brand, such as the usable belt width of 640 mm, usable height of 450 mm and a constant monitoring of operation temperatures and wash results.

All this while preserving limited dimensions, lower than the market average at an equal production capacity: with LK and LK-HD machines it is possible to wash even big or non-standard baskets, thanks to the addition of dedicated neutral zones between modules. Optimal wash results are always Kromo's main goal. What else to say, other than just try our LK and LK-HD models?



FEATURES

STANDARD

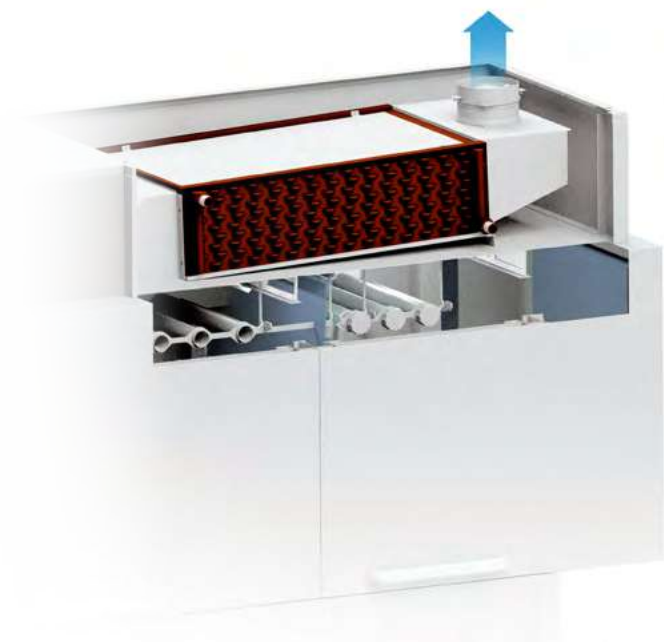
- SMART DRIVE 5-speed advancement system
- 710 mm wide conveyor with usable width of 640 mm
- Standard crates belt
- TFT 5.7" display and soft touch keyboard
- Frequently used keys shortcut and menu language setting
- Constant monitoring of key operations
- IPX5 electronic board
- Alarms and events report
- Autotimer
- Centralized 1-DRAIN and automatic AD drain, with total or partial emptying of the tanks
- Independent and adjustable wash arms
- Use economizers
- ECO-DET Detergent economizer
- ACID PROOF Radial wash tanks in AISI 316 stainless steel inclined to provide complete drainage of the wash water
- ACID PROOF stainless steel boilers in AISI 316, fully insulated to reduce thermal loss
- S/S surface filters CLEAN+ to protect the wash tanks as well as the wash pump
- Double-skin, insulated and counterbalanced doors, equipped with anti drop safety system
- THERMO BARRIER system for comfort in use
- Predisposition for Kromo rinse-aid and detergent dispensers connection
- Vertical self-cleaning pumps
- Reinforced double rinse 2R+, improved efficiency with lower consumption
- CPF System: Controlled Pressure Flow
- Water, energy consumptions and working time control system
- Possible working modes for dryer unit: all off, only fan, half power 4,5 kW + fan, total power 9 kW + fan
- Peak-cut for dosing included
- Estimated consumption readout

THERMO BARRIER

Our state of the art doors offer three main advantages: improved insulation of the washing chamber to maintain a constant temperature, reduction of power consumptions for boiler heating elements, and a decrease of humid vapour dispersed in the environment.

ACID PROOF

Our machines benefit from maximum protection against aggressive cleaning agents and salty water, thanks to the special composition and quality of the steel used for construction, both outdoing market standards. AISI 316 steel is indeed mainly employed in specific conditions of temperature and chemicals concentrations.



CLEAN+

The tank filtration system by Kromo ensures three protection modules: the first removing persistent dirt, the second on the overall tank to prevent water contamination and a third filter system to protect components.

CPF

This simple device allows to easily adjust water pressure in the prewash or wash phase in accordance to one's needs. By pulling the dedicated lever, it is possible to decrease water flow through nozzles of upper/lower wash arms.

OPTIONS

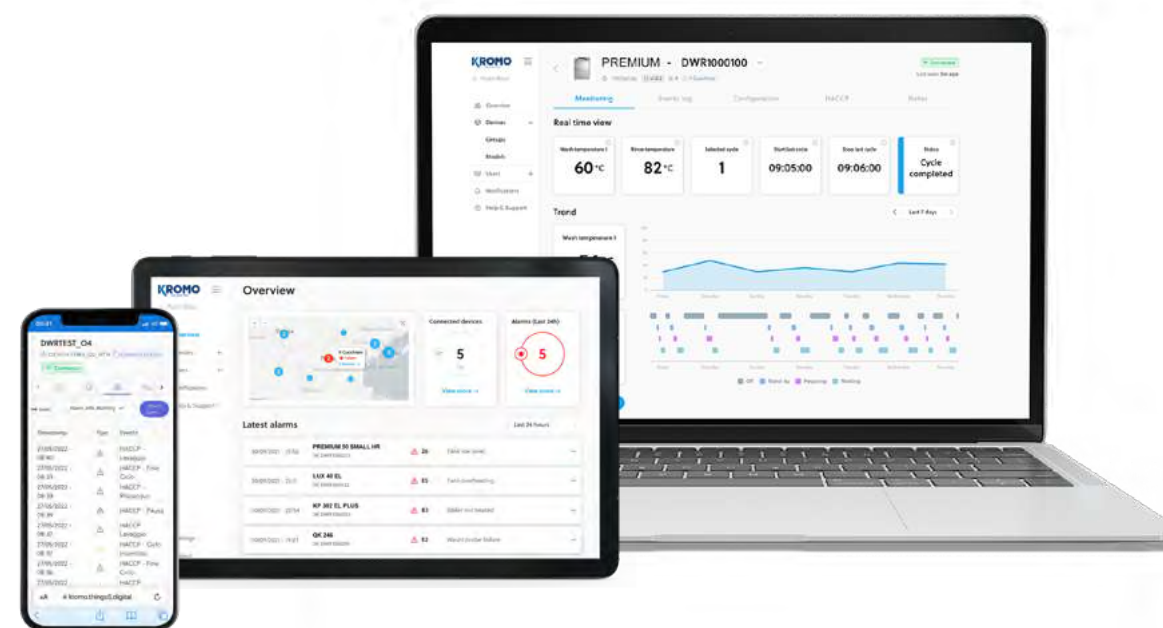
- Double belt or lower belt conveyor available
- Double skin shelf or dryer module
- Steam condenser
- 3 models of heat recovery to be chosen
- Dispensers kit with peristaltic pump, for detergent as well as rinse-aid
- Delivery in 2 or more parts, to ease installation operations
- Automatic self-cleaning of the machine available, with dedicated booster pump on request
- Thermal and acoustic insulation
- Tank insulation
- Heavy duty belt
- Break tank and booster pump
- Dedicated space for detergent and rinse-aid jugs
- S/S pumps
- Extra power in the boiler
- CONNECTIVITY remote control compliant with the HACCP norms

CONNECTIVITY 4.0

WHEREVER YOU ARE...

YOUR DISHWASHER, JUST A CLICK AWAY

You will be constantly connected to the machine to monitor the work phases, review any eventual alarm and configure remotely the operating parameters according to your needs. Compliant with HACCP norms. Compliant with HACCP norms.



View all the working parameters and event records, working hours and any problem at any time.



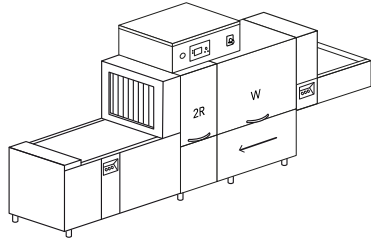
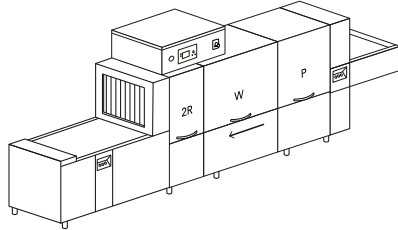
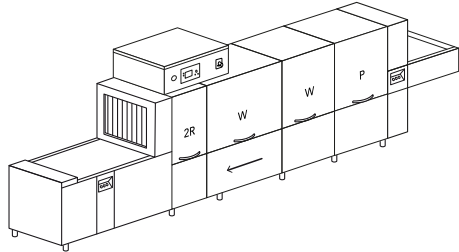
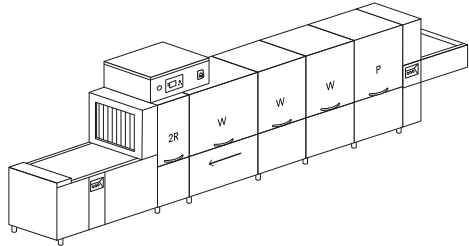
In case of problem, the machine promptly alerts you. The technician can intervene remotely to solve the problem or anticipate the needed parts for an on-site intervention.

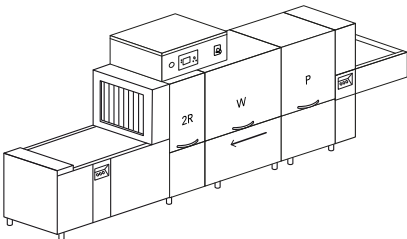
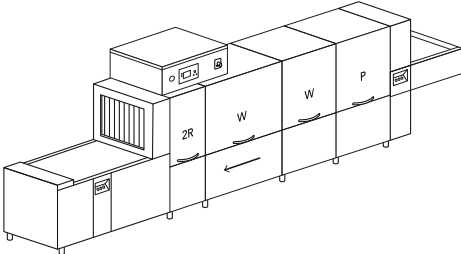


A daily activity report is available with all the events related to the dishwasher in a detailed spreadsheet with HACCP data.



Our Connectivity system is a revolutionary device limiting and facilitating the eventual intervention of a technician who can anticipate the necessary parts to be replaced, saving time and money.

Model	Voltage	Capacity	Dimensions	Code	
LK 5010 5 SPEEDS					
	400 V 3N ~ 50 Hz 31,5 kW	 640x450 H	4900x985x1860/2200 H 625 kg	LK 5010	
		belt width 710			
	400 V 3N ~ 50 Hz 2,5 kW 48 kg/h	usable width 640		LK 5010 V	
		2,20-3,45 m/min			
LK 7510 5 SPEEDS					
	400 V 3N ~ 50 Hz 36,5 kW	 640x450 H	5800x985x1860/2200 H 775 kg	LK 7510	
		belt width 710			
	400 V 3N ~ 50 Hz 4,5 kW 52 kg/h	usable width 640		LK 7510 V	
		3,25-5,10 m/min			
LK 10010 5 SPEEDS					
	400 V 3N ~ 50 Hz 56,5 kW	 640x450 H	6700x985x1860/2200 H 925 kg	LK 10010	
		belt width 710			
	400 V 3N ~ 50 Hz 6,5 kW 82 kg/h	usable width 640		LK 10010 V	
		4,45-6,95 m/min			
LK 12510 5 SPEEDS					
	400 V 3N ~ 50 Hz 74,5 kW	 640x450 H	7600x985x1860/2200 H 1075 kg	LK 12510	
		belt width 710			
	400 V 3N ~ 50 Hz 8,5 kW 108 kg/h	usable width 640		LK 12510 V	
		5,27-8,23 m/min			

Model	Voltage	Capacity	Dimensions	Code	
LK 8510 HD 5 SPEEDS					
	400 V 3N ~ 50 Hz 34,92 kW	 640x450 H	6200x985x1860/2200 H 790 kg	LK 8510 HD	
		belt width 710			
	400 V 3N ~ 50 Hz 4,42 kW 50 kg/h	usable width 640		LK 8510 HD V	
		1,4-2,15 m/min			
LK 11010 HD 5 SPEEDS					
	400 V 3N ~ 50 Hz 52,42 kW	 640x450 H	7500x985x1860/2200 H 1050 kg	LK 11010 HD	
		belt width 710			
	400 V 3N ~ 50 Hz 6,42 kW 76 kg/h	usable width 640		LK 11010 HD V	
		1,95-3 m/min			

- P** Prewash
W Power wash
2R Pre-rinse + rinse on module
V Steam-heated
- Option compatibility to be confirmed by the manufacturer after verification

OPTIONS

				PRE DOS	DDE-GROUP	DOS/S	SAN	PAP-SAN	DWI													
Model	220-240 V 3 50 Hz	380-415 V 3N 50 Hz	60 Hz	Kromo disp. connections	Dispensers kit	Dispenser with probe	Saniti- zation	Booster pump sanitization	Thermo-acou- stic insulation	Model	Tanks insulation	Connectivity (HACCP)	Extra power	Booster pump	Smart drive	S/S pumps	Centralized drain	Detergent saving system	Special belt	Price per division	Break tank	
LK 5010	+ 2%	●	+ 3%	●	€	€	€	€	€	LK 5010	€	€	€	€	●	€	●	●	+ 7%	€	€	
LK 5010 V	+ 1%	●	+ 3%	●	€	€	€	€	€	LK 5010 V	€	€	q	€	●	€	●	●	+ 7%	€	€	
LK 7510	+ 2%	●	+ 3%	●	€	€	€	€	€	LK 7510	€	€	€	€	●	€	●	●	+ 7%	€	€	
LK 7510 V	+ 1%	●	+ 3%	●	€	€	€	€	€	LK 7510 V	€	€	€	€	●	€	●	●	+ 7%	€	€	
LK 10010	+ 2%	●	+ 3%	●	€	€	€	●	€	LK 10010	€	€	€	€	●	€	●	●	+ 7%	€	€	
LK 10010 V	+ 1%	●	+ 3%	●	€	€	€	●	€	LK 10010 V	€	€	€	€	●	€	●	●	+ 7%	€	€	
LK 12510	+ 2%	●	+ 3%	●	€	€	€	●	€	LK 12510	€	€	€	€	●	€	●	●	+ 7%	€	€	
LK 12510 V	+ 1%	●	+ 3%	●	€	€	€	●	€	LK 12510 V	€	€	□	€	●	€	●	●	+ 7%	€	€	
LK 8510 HD	+ 2%	●	+ 3%	●	€	€	€	€	€	LK 8510 HD	€	€	€	€	●	€	●	●	+ 7%	€	€	
LK 8510 HD V	+ 1%	●	+ 3%	●	€	€	€	€	€	LK 8510 HD V	€	€	€	€	●	€	●	●	+ 7%	€	€	
LK 11010 HD	+ 2%	●	+ 3%	●	€	€	€	●	€	LK 11010 HD	€	€	€	€	●	€	●	●	+ 7%	€	€	
LK 11010 HD V	+ 1%	●	+ 3%	●	€	€	€	●	€	LK 11010 HD V	€	€	€	€	●	€	●	●	+ 7%	€	€	

- Standard
- Upon request
- DDE-GROUP Both detergent (with probe) and rinse-aid dispensers included
- PAP-SAN Standard pump for models LK 1001, LK 1251 and LK 1101 HD
- DIV Compulsory for machines > 4,5 m length
- BT Booster pump included
- CONNECTIVITY Includes HACCP option. 10-year plan
- DWI Insulation option for the tunnel only, dryer excluded. Shelf dryer can be insulated upon request
- DWI-DWI/T Recommended with KHRF10 - KHRF20 - KHRPF40
- XP In case of cold water supply for rinse (8-55 °C) and without any heat recovery, the extra power option is mandatory.
in case of cold water supply for rinse (8-15 °C), we recommend the heat recovery option

EAC label upon request

Option compatibility to be confirmed by the manufacturer after verification

OPTIONS

	NZ3	NZ6	NZH6	KDRF69	KDRF6V	ID	KDRF99M	KDRF9VM	KDRF99MB	KDRF99MB1		KDRF99MB2	KDRF9VMB	KDRF9VMB1	KDRF9VMB2	U-AIR	KSCF10	KHRF10	KHRF20	KHRPF40	3R	STOCK	HD+BELT	
Model	Neutral zone 300	Neutral zone 600	Neutral zone for dryer 600	Shelf dryer	Steam heated shelf dryer	Double skin for shelf dryer	Module dryer	Steam heated dryer module	Dryer module with blowers	Dryer module with blowers	Model	Dryer module with blowers	Steam heated dryer module with blowers	Steam heated dryer module with blowers	Steam heated dryer module with blowers	Proximity air nozzle	Steam condenser	Heat recovery	Heat recovery	Heat recovery	Triple rinse	Chemicals compartment	Heavy-duty belt	
LK 5010	€	€	€	€	----	€	€	----	€	€	LK 5010	€	----	----	----	€	€	€	----	€	€	€	€	
LK 5010 V	€	€	€	€	€	€	€	€	€	€	LK 5010 V	€	€	€	€	€	€	€	----	€	€	€	€	
LK 7510	€	€	€	€	----	€	€	----	€	€	LK 7510	€	----	----	----	€	€	€	€	€	€	€	€	
LK 7510 V	€	€	€	€	€	€	€	€	€	€	LK 7510 V	€	€	€	€	€	€	€	€	€	€	€	€	
LK 10010	€	€	€	€	----	€	€	----	€	€	LK 10010	€	----	----	----	€	€	€	€	€	€	€	€	
LK 10010 V	€	€	€	€	€	€	€	€	€	€	LK 10010 V	€	€	€	€	€	€	€	€	€	€	€	€	
LK 12510	€	€	€	€	----	€	€	----	€	€	LK 12510	€	----	----	----	€	€	€	€	€	€	€	€	
LK 12510 V	€	€	€	€	€	€	€	€	€	€	LK 12510 V	€		€	€	€	€	€	€	€	€	€	€	
LK 8510 HD	€	€	€	€	----	€	€	----	€	€	LK 8510 HD	€	----	----	----	€	€	€	€	€	€	€	€	
LK 8510 HD V	€	€	€	€	€	€	€	€	€	€	LK 8510 HD V	€	€	€	€	€	€	€	€	€	€	€	€	
LK 11010 HD	€	€	€	€	----	€	€	----	€	€	LK 11010 HD	€	----	----	----	€	€	€	€	€	€	€	€	
LK 11010 HD V	€	€	€	€	€	€	€	€	€	€	LK 11010 HD V	€	€	€	€	€	€	€	€	€	€	€	€	

● Not available

NZ3 Recommended to wash long baskets

NZ6 Recommended to wash long baskets. Module equipped with a front door






NZH6 Recommended for dryers with blowers

U-AIR Proximity air nozzles available on every dryer module

ID Recommended option for KDRF69 and KDRF6V. Only for dryer on shelf

HD+BELT For each dryer module and neutral zone, the extra price is + €.

With osmotic water supply and electrical conductivity lower than 200 microsiemens, it is mandatory to install a stainless steel heat exchanger




NZ3 + 300 mm Neutral zone	NZH6 + 600 mm Neutral zone with door for dryer	KDRF69 9 kW Shelf dryer	KDRF99M + 900 mm - 9 kW Dryer module	KDRF99MB + 900 mm 16,1 kW Dryer module
NZ6 + 600 mm Neutral zone with door		KDRF6V Steam heated shelf dryer	KDRF9VM + 900 mm Steam heated dryer module	KDRF9VMB + 900 mm 7,1 kW Steam heated dryer module


KDRF99MB1 - KDRF9VMB1 Lower by-pass belt with blowers. Maximum 1 per machine as an alternative to the double belt

KDRF99MB2 -KDRF9VMB2 Double belt with blowers. Maximum 1 per machine as an alternative to the lowered by-pass belt






KHRF10-KHRF20-KHRPF40 In case of cold water supply for rinse (8-15 °C), we recommend to install the heat recovery system option
Option compatibility to be confirmed by the manufacturer after verification



with blowers and lowered belt



with blowers and double belt



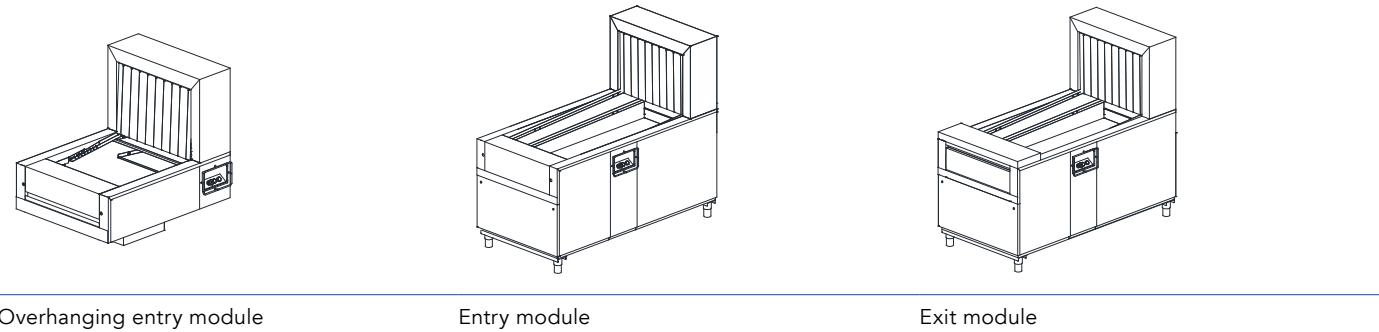
KDRF99MB1 + 900 mm 16,1 kW Dryer module	KDRF99MB2 + 900 mm 16,1 kW Dryer module	KHRF10 Compact heat recovery	KHRF20 Heat recovery	KHRPF40 Heat recovery with heat pump
KDRF9VMB1 + 900 mm 7,1 kW Steam heated dryer module	KDRF9VMB2 + 900 mm 7,1 kW Steam heated dryer module	KSCF10 Steam condenser		

OPTIONS

MI900							MIR2700						
MI1200							EM900						
MIS1200							EM1200						
MI1800							EM1800						
MI2200							EM2200						
MI2700							EM2700						
Model	Entry mod. 900	Entry mod. 1200	Over. entry mod. 1200	Entry mod. 1800	Entry mod. 2200	Entry mod. 2700	Model	Lowered entry mod. 2700	Exit mod. 900	Exit mod. 1200	Exit mod. 1800	Exit mod. 2200	Exit mod. 2700
LK 5010	€	€	●	€	€	€	LK 5010	€	□	□	●	€	€
LK 5010 V	€	€	●	€	€	€	LK 5010 V	€	□	□	●	€	€
LK 7510	€	€	●	€	€	€	LK 7510	€	□	□	●	€	€
LK 7510 V	€	€	●	€	€	€	LK 7510 V	€	□	□	●	€	€
LK 10010	€	€	●	€	€	€	LK 10010	€	□	□	●	€	€
LK 10010 V	€	€	●	€	€	€	LK 10010 V	€	□	□	●	€	€
LK 12510	€	€	●	€	€	€	LK 12510	€	□	□	●	€	€
LK 12510 V	€	€	●	€	€	€	LK 12510 V	€	□	□	●	€	€
LK 8510 HD	€	€	●	€	€	€	LK 8510 HD	€	□	□	●	€	€
LK 8510 HD V	€	€	●	€	€	€	LK 8510 HD V	€	□	□	●	€	€
LK 11010 HD	€	€	●	€	€	€	LK 11010 HD	€	□	□	●	€	€
LK 11010 HD V	€	€	●	€	€	€	LK 11010 HD V	€	□	□	●	€	€

- Standard
- Upon request
- Not available

Option compatibility to be confirmed by the manufacturer after verification



GLASSWASHERS	2 x glass basket, 1 x saucer holder, 1 x cutlery holder
DISHWASHERS	1 x dish basket, 1 x glass basket, 1 x cutlery holder (LUX 85 EL PLUS + 1 C43)
HOOD-TYPE DISHWASHERS	2 x Dish basket, 1 x Glass basket, 2 x Cutlery holder
RACK CONVEYOR DISHWASHERS	1 x dish basket, 1 x glass basket, 1 x cutlery basket 8 places, 1 x tray basket
WAREWASHERS	KP 76 EL - KP 136 EL PLUS: 1 x S/S trays support, 1 x large mesh plastic basket, 1 x spatula holder (KP 76 EL + 1 S/S griddle) KP 86 EL PLUS: 1 x S/S basket, 1 x trays support, 1 x S/S spatula holder KP 151 EL - KP 402 EL PLUS: 1 x S/S basket, 1 x S/S griddle, 1 x trays support, 1 x S/S spatula holder KP 202 EL PLUS - KP 302 EL PLUS - KP 402 EL PLUS: 1 x S/S basket, 1 x S/S trays support, 1 x S/S spatula holder

DELIVERY	20 days for semi-automatic machines - 50 days for automatic machine
PACKING	Cardboard box (included in the price) The wooden cage's price is the equivalent of the 2% of the machine's net price -minimum amount charged is 85 € (on the following models: RK, QK, TK, TL, VK, LK, LK-HD, K 7A, KM7, KM22, KM23, K 19, K 21, K 22, K 23, K 2ME, K5/20)
SPARE PARTS	For orders lower than net 50 €, a 5 € fee will be applied as management costs
TERMS	Ex-works
WARRANTY ON OUR PARTS	24 months from invoice date, subject to our technical department verification of the problem causes
TRANSPORT	The supply is carried out Ex works KROMO ALI GROUP Srl. The goods travel at the Purchaser's sole risk even when the carrier has been chosen and instructed by KROMO ALI GROUP Srl on behalf of the purchasing party
OWNERSHIP RESERVATION	The goods are the exclusive property of KROMO ALI GROUP Srl until the invoice is paid in full
COURT OF JURISDICTION	Contracts stipulated with KROMO ALI GROUP Srl are subject to Italian law. For any dispute that may arise from contracts with KROMO ALI GROUP Srl - including abroad contracts - the court of jurisdiction shall be that of Treviso
USER MANUALS	User Manuals are originally issued in a main E.U. language. When put into service, each machinery must be provided with an appropriate translation of the original Manual in the language(s) used in the Country where the appliance is installed accompanied by its original instructions,too. This translation is full care and responsibility of the Importer of the machinery in the end-user's region. In case of tunnel machines, the possibility to have our technician/s on site to assist in the assembly and start-up will be quoted separately.

Ensure adequate ventilation of the room according to the legislation in force in the country of installation and the relevant technical standards. For example, for European countries, please refer to the EN 16282-1 standard.

Continual improvements may supersede specifications.



* The WRAS Approved Product logo is a certification marks which is owned by WRAS Ltd. - WRAS Approved Type AA - air gap

The certification brands do not refer to all products. Our documentation includes certified and non-certified products.

The information required by the Article 33 (1) of Regulation (EC) 1907/2006 (REACH) and the related SCIP notifications are available on our website.

For more information, please contact the manufacturer.



KROMO ALI GROUP SRL

Via Mestre, 3
31033 Castelfranco Veneto (TV)
T: +39 0423 734580
F: +39 0423 734581
kromo@kromo-ali.com

SERVICE:

T: +39 0423 734593
F: +39 0423 734592
E: service@kromo-ali.com

www.kromo-ali.com

Edition 09.2023

an Ali Group Company



The Spirit of Excellence